



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

ANY THREAD . . . ANY LENGTH . . . ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

Welcome ...

We are pleased to introduce our newly expanded line of medium-duty levelers offering hundreds of new products with thousands of features to provide just the right leveling solution for your application.

We've included an overview of the complete line, a new selection chart and product specification tables with dimensions and load ratings for easily finding an off-the-shelf standard product. You'll find a quote request form available for modifying a leveler or a custom leveler design when a standard product won't quite meet your leveling needs.

IEC's mission since 1992 has been to lead the leveler industry in meeting the needs of OEM machinery and equipment manufacturers with medium duty leveler products that match our customers' high standards and cost requirements. We have specialized in developing medium duty levelers with the most commonly requested features, materials and configurations offering high-strength bases and adjustable 2" to 8" stud lengths. Our engineering department is always available to assist you with selecting the right standard product for your application or designing a leveler to your exact specifications.

We recognize the need in OEM manufacturing for high performance products, attractive designs and competitive pricing. We've made every effort to address these needs in this catalog. We now offer more choices for top and bottom leveler adjustment, stud and base materials and stud lengths to better suit your application needs.

Paying attention to our customers and their needs for over 20 years has enabled IEC to become the leader in leveling solution design and development. This has resulted in thousands of new products, stronger customer service and assurance that the products you specify today will be available for the duration of your product life-cycle.

IEC provides the industry's most complete line of standard and custom leveling devices in "any thread...any length...any base." We appreciate your interest and hope to hear from you whenever you need a leveling solution.



CONTENTS

WELCOME

CONTENTS	3
PRODUCT OVERVIEW	4
SELECTION GUIDE	5

NYLON SWIVEL LEVELERS

Nylon Swivel, Socket with Rubber Pad.....	6
Nylon Swivel, Metric Socket with Rubber Pad	7
Nylon Swivel, Stud with Rubber Pad - 2" Stud Length	8
Nylon Swivel, Stud with Rubber Pad - 3" Stud Length	10
Nylon Swivel, Stud with Rubber Pad - 4" Stud Length	12
Nylon Swivel, Stud with Rubber Pad - 5" Stud Length	14
Nylon Swivel, Stud with Rubber Pad - 6" Stud Length	16
Nylon Swivel, Stud with Rubber Pad - 8" Stud Length	18
Nylon Swivel, Metric Stud with Rubber Pad - 2",3",4",5",6",8" Stud Lengths	20-31

THREADED TUBE ENDS

Threaded Tube Ends	32
--------------------------	----

LOW PROFILE POLY SWIVEL

Low Profile Poly Swivel Socket Levelers	34
Low Profile Metric Poly Swivel Socket Levelers	35
Low Profile Poly Swivel Stud Levelers - 2" Stud Length	36
Low Profile Poly Swivel Stud Levelers - 3" Stud Length	37
Low Profile Poly Swivel Stud Levelers - 4" Stud Length	38
Low Profile Poly Swivel Stud Levelers - 5" Stud Length	39
Low Profile Poly Swivel Stud Levelers - 6" Stud Length	40
Low Profile Poly Swivel Stud Levelers - 8" Stud Length	41
Low Profile Metric Poly Swivel Stud Levelers - 2",3",4",5",6",8" Stud Lengths	42-47

POLY BASED FIXED GLIDES

Poly Based Fixed Stud Glides	48-50
Poly Based Fixed Socket Glides	51
Poly Based Metric Fixed Stud Glides	52-53

KNOB STYLE GLIDES

Knob Style Glides Socket Type.....	54
Threaded Nylon Knob Hubs / Sleeves	55-56
Knob Style Glides Stud Type	54-57

RFQ FAX-BACK FORM

Request A Quote Form	58
----------------------------	----

WARRANTY

Warranty and Disclaimer.....	59
------------------------------	----



MEDIUM DUTY LEVELERS

NYLON SWIVEL – SOCKET LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

NYLON SWIVEL – STUD LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel stud has trivalent zinc, yellow chromate finish.

LOW-PROFILE POLY SWIVEL – SOCKET LEVELERS

The IEC Low-Profile Steel and Stainless Steel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.

LOW-PROFILE POLY SWIVEL – STUD LEVELERS

The IEC Low-Profile Steel and Stainless Steel Stud Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.

POLY BASE FIXED STUD & SOCKET GLIDES

The IEC Poly Base Steel and Stainless Steel Fixed Stud & Socket Glides are ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Trivalent zinc plated steel stud and black polypropylene base. Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).

KNOB STYLE – LEVELING GLIDES

The IEC Knob Style Steel and Stainless Steel Socket and Stud Style Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene or PVC base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Trivalent, zinc-plated steel stud.





Features by Leveler Family	Nylon Swivel Socket	Nylon Swivel Stud	Low Profile Poly Swivel Socket	Low Profile Poly Swivel Stud	Low Profile Poly Fixed Stud	Low Profile Poly Fixed Socket	Knob Style Socket/Stud
Steel	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Stainless Steel	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Load Range	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 1,000 lbs.
Inch Threads	1/4-20 to 1-8	1/4-20 to 1 1/4-7	1/4-2 to 1-8	1/4-20 to 1 1/4-7	1/4-20 to 3/4-10	1/4-20 to 3/4-10	1/4-20 to 1/2-13
Metric Threads	M6-M24	M6-M24	M6-M24	M6-M24	M6-M16	M6-M16	M6-M10
Stud Lengths	N / A	2" to 8"	N / A	2" to 8"	1/2" to 8"	N / A	1/2" to 3 3/8"
Top Thread Adjustment	N / A	Yes	N / A	Yes	Yes	N / A	Yes
Swivel Base 15 Degrees	Yes	Yes	Yes	Yes	N / A	N / A	N / A
Optional Lag Holes	Yes	Yes	N / A	N / A	N / A	N / A	N / A
Base Diameters	1 1/2" to 10"	1 1/2" to 10"	1" to 4"	1" to 4"	1" to 3"	1" to 3"	1" to 3"
Base Material	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon	Polypropylene
Fixed Base	N / A	N / A	N / A	N / A	Yes	Yes	Yes
Jam Nut Provided	Yes	Yes	Yes	Yes	Supplied on request	N / A	Supplied on request
Optional Rubber Pad	Yes	Yes	N / A	N / A	N / A	N / A	Yes
Catalog Page	6-7	8-31	34-35	36-47	48-50 52-53	51	54-57



NYLON SWIVEL SOCKET LEVELERS – with Rubber Pad


The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

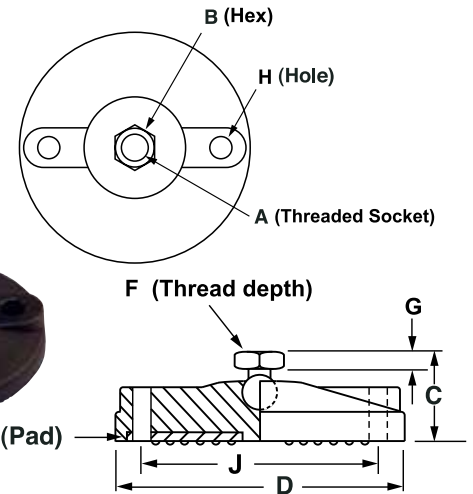

1-1/2" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL93-4G-P	IL93-4S-P	100	1/4-20	1/2	1	1 1/2	3/8	3/16	-	-
IL93-5G-P	IL93-5S-P	500	5/16-18	1/2	1	1 1/2	3/8	3/16	-	-
IL93-6G-P	IL93-6S-P	2000	3/8-16	1/2	1	1 1/2	3/8	3/16	-	-
IL93-7G-P	IL93-7S-P	2000	1/2-13	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-8G-P	IL93-8S-P	2000	5/8-11	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-9G-P	IL93-9S-P	2000	3/4-10	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-10G-P	IL93-10S-P	2000	1-8	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-4G-P	IL95-4S-P	100	1/4-20	1/2	1	2 3/8	3/8	3/16	-	-
IL95-5G-P	IL95-5S-P	500	5/16-18	1/2	1	2 3/8	3/8	3/16	-	-
IL95-6G-P	IL95-6S-P	2500	3/8-16	1/2	1	2 3/8	3/8	3/16	-	-
IL95-7G-P	IL95-7S-P	2500	1/2-13	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-8G-P	IL95-8S-P	2500	5/8-11	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-9G-P	IL95-9S-P	2500	3/4-10	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-10G-P	IL95-10S-P	2500	1-8	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-4G-H-P	IL97-4S-H-P	100	1/4-20	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-5G-H-P	IL97-5S-H-P	500	5/16-18	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-6G-H-P	IL97-6S-H-P	3000	3/8-16	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-7G-H-P	IL97-7S-H-P	3000	1/2-13	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-8G-H-P	IL97-8S-H-P	3000	5/8-11	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-9G-H-P	IL97-9S-H-P	3000	3/4-10	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-10G-H-P	IL97-10S-H-P	3000	1-8	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-4G-H-P	IL99-4S-H-P	100	1/4-20	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-5G-H-P	IL99-5S-H-P	500	5/16-18	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-6G-H-P	IL99-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-7G-H-P	IL99-7S-H-P	3000	1/2-13	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-8G-H-P	IL99-8S-H-P	3000	5/8-11	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-9G-H-P	IL99-9S-H-P	3000	3/4-10	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-10G-H-P	IL99-10S-H-P	3000	1-8	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-4G-H-P	IL99A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-5G-H-P	IL99A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-6G-H-P	IL99A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-7G-H-P	IL99A-7S-H-P	3000	1/2-13	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-8G-H-P	IL99A-8S-H-P	3000	5/8-11	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-9G-H-P	IL99A-9S-H-P	3000	3/4-10	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-10G-H-P	IL99A-10S-H-P	3000	1-8	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-4G-H-P	IL99B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-5G-H-P	IL99B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-6G-H-P	IL99B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-7G-H-P	IL99B-7S-H-P	3000	1/2-13	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-8G-H-P	IL99B-8S-H-P	3000	5/8-11	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-9G-H-P	IL99B-9S-H-P	3000	3/4-10	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-10G-H-P	IL99B-10S-H-P	3000	1-8	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL98C-9G-H-P	IL98C-9S-H-P	3000	3/4-10	1	1-7/8	10	5/8	11/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"-H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P" To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**METRIC SWIVEL SOCKET****NYLON SWIVEL METRIC SOCKET STYLE****LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

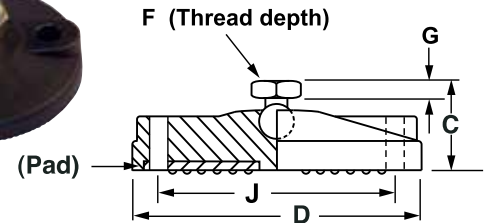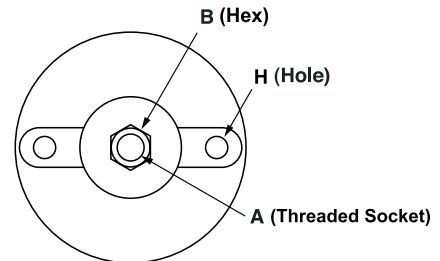**Metric Threads : 1-1/2" to 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL93-M6G-P	IL93-M6S-P	100	M6X1	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M8G-P	IL93-M8S-P	500	M8X1.25	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M10G-P	IL93-M10S-P	2000	M10X1.50	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M12G-P	IL93-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-M16G-P	IL93-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-M20G-P	IL93-M20S-P	2000	M20X2.50	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-M24G-P	IL93-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-M6G-P	IL95-M6S-P	100	M6X1	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M8G-P	IL95-M8S-P	500	M8X1.25	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M10G-P	IL95-M10S-P	2500	M10X1.50	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M12G-P	IL95-M12S-P	2500	M12X1.75	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-M16G-P	IL95-M16S-P	2500	M16X2.00	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-M20G-P	IL95-M20S-P	2500	M20X2.50	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-M24G-P	IL95-M24S-P	2500	M24X3.00	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-M6G-H-P	IL97-M6S-H-P	100	M6X1	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M8G-H-P	IL97-M8S-H-P	500	M8X1.25	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M10G-H-P	IL97-M10S-H-P	3000	M10X1.50	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M12G-H-P	IL97-M12S-H-P	3000	M12X1.75	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-M16G-H-P	IL97-M16S-H-P	3000	M16X2.00	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-M20G-H-P	IL97-M20S-H-P	3000	M20X2.50	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-M24G-H-P	IL97-M24S-H-P	3000	M24X3.00	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-M6G-H-P	IL99-M6S-H-P	100	M6X1	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M8G-H-P	IL99-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M10G-H-P	IL99-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M12G-H-P	IL99-M12S-H-P	3000	M12X1.75	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-M16G-H-P	IL99-M16S-H-P	3000	M16X2.00	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-M20G-H-P	IL99-M20S-H-P	3000	M20X2.50	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-M24G-H-P	IL99-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-M6G-H-P	IL99A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M8G-H-P	IL99A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M10G-H-P	IL99A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M12G-H-P	IL99A-M12S-H-P	3000	M12X1.75	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-M16G-H-P	IL99A-M16S-H-P	3000	M16X2.00	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-M20G-H-P	IL99A-M20S-H-P	3000	M20X2.50	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-M24G-H-P	IL99A-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-M6G-H-P	IL99B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M8G-H-P	IL99B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M10G-H-P	IL99B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M12G-H-P	IL99B-M12S-H-P	3000	M12X1.75	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-M16G-H-P	IL99B-M16S-H-P	3000	M16X2.00	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-M20G-H-P	IL99B-M20S-H-P	3000	M20X2.50	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-M24G-H-P	IL99B-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL99C-M6G-H-P	IL99C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M8G-H-P	IL99C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M10G-H-P	IL99C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M12G-H-P	IL99C-M12S-H-P	3000	M12X1.75	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL99C-M16G-H-P	IL99C-M16S-H-P	3000	M16X2.00	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL99C-M20G-H-P	IL99C-M20S-H-P	3000	M20X2.50	1	1-7/8	10	5/8	11/16	.51	8.9
IL99C-M24G-H-P	IL99C-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P" To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

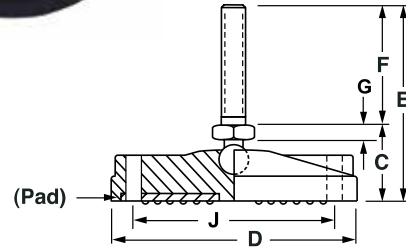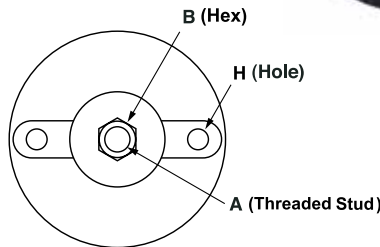**1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers--2" Stud and Rubber Pad											
IL92-4Gx1-P	IL92-4Sx1-P	100	1/4-20	1/2	1	1-1/2	2	1	3/16	-	-
IL92-4Gx15-P	IL92-4Sx15-P	100	1/4-20	1/2	1	1-1/2	2-1/2	1-1/2	3/16	-	-
IL92-4G-P	IL92-4S-P	100	1/4-20	1/2	1	1-1/2	3	2	3/16	-	-
IL92-5Gx1-P	IL92-5Sx1-P	500	5/16-18	1/2	1	1-1/2	2	1	3/16	-	-
IL92-5G-P	IL92-5S-P	500	5/16-18	1/2	1	1-1/2	3	2	3/16	-	-
IL92-6G-P	IL92-6S-P	2000	3/8-16	1/2	1	1-1/2	3	2	3/16	-	-
IL92-7G-P	IL92-7S-P	2000	1/2-13	1/2	1	1-1/2	3	2	3/16	-	-
IL92-8G-P	IL92-8S-P	2000	5/8-11	5/8	1	1-1/2	3	2	3/16	-	-
IL92-9G-P	IL92-9S-P	2000	3/4-10	3/4	1	1-1/2	3	2	3/16	-	-
IL92-10G-P	IL92-10S-P	2000	1-8	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL92-12G-P	IL92-12S-P	2000	1 1/4-7	1-1/4	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-4Gx1-P	IL94-4Sx1-P	100	1/4-20	1/2	1	2-3/8	2	1	3/16	-	-
IL94-4Gx15-P	IL94-4Sx15-P	100	1/4-20	1/2	1	2-3/8	2-1/2	1-1/2	3/16	-	-
IL94-4G-P	IL94-4S-P	100	1/4-20	1/2	1	2-3/8	3	2	3/16	-	-
IL94-5Gx1-P	IL94-5Sx1-P	500	5/16-18	1/2	1	2-3/8	2	1	3/16	-	-
IL94-5G-P	IL94-5S-P	500	5/16-18	1/2	1	2-3/8	3	2	3/16	-	-
IL94-6G-P	IL94-6S-P	2500	3/8-16	1/2	1	2-3/8	3	2	3/16	-	-
IL94-7G-P	IL94-7S-P	2500	1/2-13	1/2	1	2-3/8	3	2	3/16	-	-
IL94-8G-P	IL94-8S-P	2500	5/8-11	5/8	1	2-3/8	3	2	3/16	-	-
IL94-9G-P	IL94-9S-P	2500	3/4-10	3/4	1	2-3/8	3	2	3/16	-	-
IL94-10G-P	IL94-10S-P	2500	1-8	1	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL94-12G-P	IL94-12S-P	2500	1 1/4-7	1-1/4	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL96-4Gx1-H-P	IL96-4Sx1-H-P	100	1/4-20	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-4Gx15-P	IL96-4Sx15-P	100	1/4-20	1/2	1	3-1/8	2-1/2	1-1/2	3/16	.39	2.2
IL96-4G-H-P	IL96-4S-H-P	100	1/4-20	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-5Gx1-P	IL96-5Sx1-P	500	5/16-18	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-5G-H-P	IL96-5S-H-P	500	5/16-18	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-6G-H-P	IL96-6S-H-P	3000	3/8-16	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-7G-H-P	IL96-7S-H-P	3000	1/2-13	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-8G-H-P	IL96-8S-H-P	3000	5/8-11	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-9G-H-P	IL96-9S-H-P	3000	3/4-10	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-10G-H-P	IL96-10S-H-P	3000	1-8	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL96-12G-H-P	IL96-12S-H-P	3000	1 1/4-7	1-1/4	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL98-4Gx1-H-P	IL98-4Sx1-H-P	100	1/4-20	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-4Gx15-P	IL98-4Sx15-P	100	1/4-20	1/2	1-1/4	4	2-3/4	1-1/2	3/16	.51	2.9
IL98-4G-H-P	IL98-4S-H-P	100	1/4-20	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-5Gx1-P	IL98-5Sx1-P	500	5/16-18	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-5G-H-P	IL98-5S-H-P	500	5/16-18	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-6G-H-P	IL98-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-7G-H-P	IL98-7S-H-P	3000	1/2-13	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-8G-H-P	IL98-8S-H-P	3000	5/8-11	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-9G-H-P	IL98-9S-H-P	3000	3/4-10	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-10G-H-P	IL98-10S-H-P	3000	1-8	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98-12G-H-P	IL98-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	4	3-1/2	2	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

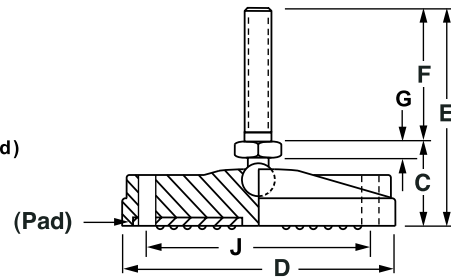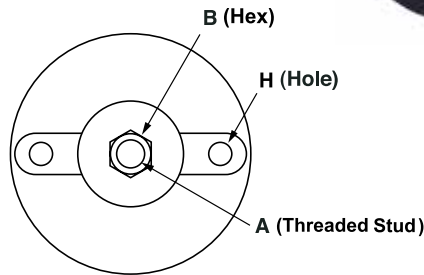**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98A-4Gx1-H-P	IL98A-4Sx1-H-P	100	1/4-20	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-4Gx15-P	IL98A-4Sx15-P	100	1/4-20	1/2	1-1/4	6	2-3/4	1-1/2	3/16	.51	4.9
IL98A-4G-H-P	IL98A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-5Gx1-P	IL98A-5Sx1-P	500	5/16-18	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-5G-H-P	IL98A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-6G-H-P	IL98A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-7G-H-P	IL98A-7S-H-P	3000	1/2-13	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-8G-H-P	IL98A-8S-H-P	3000	5/8-11	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-9G-H-P	IL98A-9S-H-P	3000	3/4-10	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-10G-H-P	IL98A-10S-H-P	3000	1-8	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98A-12G-H-P	IL98A-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-4Gx1-H-P	IL98B-4Sx1-H-P	100	1/4-20	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-4Gx15-P	IL98B-4Sx15-P	100	1/4-20	1/2	1-1/4	8	2-3/4	1-1/2	3/16	.51	6.9
IL98B-4G-H-P	IL98B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-5Gx1-P	IL98B-5Sx1-P	500	5/16-18	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-5G-H-P	IL98B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-6G-H-P	IL98B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-7G-H-P	IL98B-7S-H-P	3000	1/2-13	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-8G-H-P	IL98B-8S-H-P	3000	5/8-11	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-9G-H-P	IL98B-9S-H-P	3000	3/4-10	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-10G-H-P	IL98B-10S-H-P	3000	1-8	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98B-12G-H-P	IL98B-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-4Gx1-H-P	IL98C-4Sx1-H-P	100	1/4-20	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-4Gx15-P	IL98C-4Sx15-P	100	1/4-20	1/2	1-1/4	10	3-1/4	1-1/2	3/16	.51	8.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-5Gx1-P	IL98C-5Sx1-P	500	5/16-18	1/2	1-1/4	10	1-1/4	1	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98B-9G-H-P	IL98C-9S-H-P	3000	3/4-10	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1	1-1/2	10	3-1/2	2	7/16	.51	8.9
IL98C-12G-H-P	IL98C-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	10	3-1/2	2	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P". To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 3 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

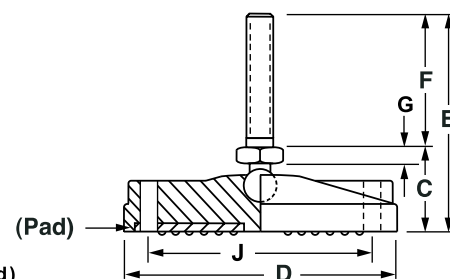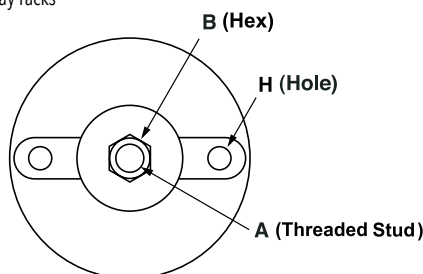

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL92-4GX3-P	IL92-4SX3-P	100	1/4-20	1/2	1	1 1/2	4	3	3/16	-	-
IL92-5GX3-P	IL92-5SX3-P	500	5/16-18	1/2	1	1 1/2	4	3	3/16	-	-
IL92-6GX3-P	IL92-6SX3-P	2000	3/8-16	1/2	1	1 1/2	4	3	3/16	-	-
IL92-7GX3-P	IL92-7SX3-P	2000	1/2-13	1/2	1	1 1/2	4	3	3/16	-	-
IL92-8GX3-P	IL92-8SX3-P	2000	5/8-11	5/8	1	1 1/2	4	3	3/16	-	-
IL92-9GX3-P	IL92-9SX3-P	2000	3/4-10	3/4	1	1 1/2	4	3	3/16	-	-
IL92-10GX3-P	IL92-10SX3-P	2000	1-8	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL92-12GX3-P	IL92-12SX3-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-4GX3-P	IL94-4SX3-P	100	1/4-20	1/2	1	2 3/8	4	3	3/16	-	-
IL94-5GX3-P	IL94-5SX3-P	500	5/16-18	1/2	1	2 3/8	4	3	3/16	-	-
IL94-6GX3-P	IL94-6SX3-P	2500	3/8-16	1/2	1	2 3/8	4	3	3/16	-	-
IL94-7GX3-P	IL94-7SX3-P	2500	1/2-13	1/2	1	2 3/8	4	3	3/16	-	-
IL94-8GX3-P	IL94-8SX3-P	2500	5/8-11	5/8	1	2 3/8	4	3	3/16	-	-
IL94-9GX3-P	IL94-9SX3-P	2500	3/4-10	3/4	1	2 3/8	4	3	3/16	-	-
IL94-10GX3-P	IL94-10SX3-P	2500	1-8	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL94-12GX3-P	IL94-12SX3-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-4GX3-H-P	IL96-4SX3-H-P	100	1/4-20	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-5GX3-H-P	IL96-5SX3-H-P	500	5/16-18	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-6GX3-H-P	IL96-6SX3-H-P	3000	3/8-16	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-7GX3-H-P	IL96-7SX3-H-P	3000	1/2-13	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-8GX3-H-P	IL96-8SX3-H-P	3000	5/8-11	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-9GX3-H-P	IL96-9SX3-H-P	3000	3/4-10	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-10GX3-H-P	IL96-10SX3-H-P	3000	1-8	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL96-12GX3-H-P	IL96-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL98-4GX3-H-P	IL98-4SX3-H-P	100	1/4-20	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-5GX3-H-P	IL98-5SX3-H-P	500	5/16-18	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-6GX3-H-P	IL98-6SX3-H-P	3000	3/8-16	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-7GX3-H-P	IL98-7SX3-H-P	3000	1/2-13	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-8GX3-H-P	IL98-8SX3-H-P	3000	5/8-11	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-9GX3-H-P	IL98-9SX3-H-P	3000	3/4-10	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-10GX3-H-P	IL98-10SX3-H-P	3000	1-8	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98-12GX3-H-P	IL98-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	4 1/2	3	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 3 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**




The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

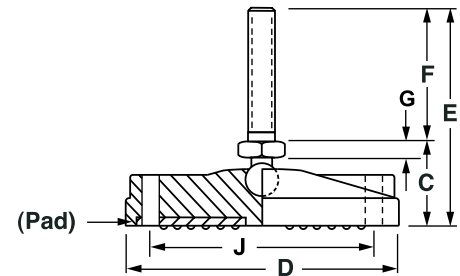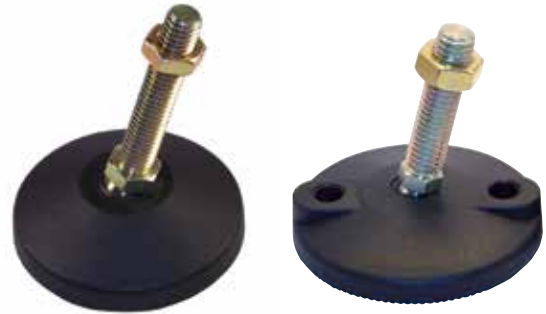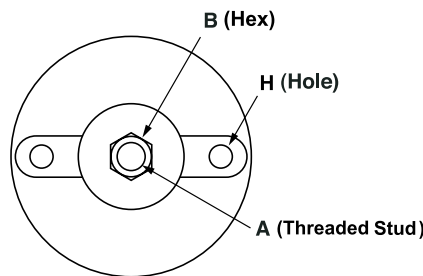**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98A-4GX3-H-P	IL98A-4SX3-H-P	100	1/4-20	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-5GX3-H-P	IL98A-5SX3-H-P	500	5/16-18	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-6GX3-H-P	IL98A-6SX3-H-P	3000	3/8-16	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-7GX3-H-P	IL98A-7SX3-H-P	3000	1/2-13	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-8GX3-H-P	IL98A-8SX3-H-P	3000	5/8-11	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-9GX3-H-P	IL98A-9SX3-H-P	3000	3/4-10	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-10GX3-H-P	IL98A-10SX3-H-P	3000	1-8	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98A-12GX3-H-P	IL98A-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-4GX3-H-P	IL98B-4SX3-H-P	100	1/4-20	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-5GX3-H-P	IL98B-5SX3-H-P	500	5/16-18	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-6GX3-H-P	IL98B-6SX3-H-P	3000	3/8-16	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-7GX3-H-P	IL98B-7SX3-H-P	3000	1/2-13	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-8GX3-H-P	IL98B-8SX3-H-P	3000	5/8-11	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-9GX3-H-P	IL98B-9SX3-H-P	3000	3/4-10	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-10GX3-H-P	IL98B-10SX3-H-P	3000	1-8	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98B-12GX3-H-P	IL98B-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-4GX3-H-P	IL98C-4SX3-H-P	100	1/4-20	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-5GX3-H-P	IL98C-5SX3-H-P	500	5/16-18	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-6GX3-H-P	IL98C-6SX3-H-P	3000	3/8-16	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-7GX3-H-P	IL98C-7SX3-H-P	3000	1/2-13	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-8GX3-H-P	IL98C-8SX3-H-P	3000	5/8-11	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-9GX3-H-P	IL98C-9SX3-H-P	3000	3/4-10	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-10GX3-H-P	IL98C-10SX3-H-P	3000	1-8	1	1 1/2	10	4 1/2	3	7/16	.51	8.9
IL98C-12GX3-H-P	IL98C-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 4 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

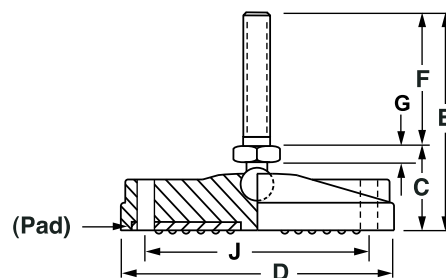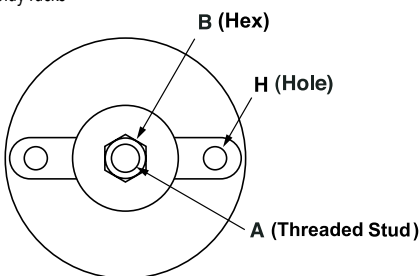

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL92-5GX4-P	IL92-5SX4-P	500	5/16-18	1/2	1	1 1/2	5	4	3/16	-	-
IL92-6GX4-P	IL92-6SX4-P	2000	3/8-16	1/2	1	1 1/2	5	4	3/16	-	-
IL92-7GX4-P	IL92-7SX4-P	2000	1/2-13	1/2	1	1 1/2	5	4	3/16	-	-
IL92-8GX4-P	IL92-8SX4-P	2000	5/8-11	5/8	1	1 1/2	5	4	3/16	-	-
IL92-9GX4-P	IL92-9SX4-P	2000	3/4-10	3/4	1	1 1/2	5	4	3/16	-	-
IL92-10GX4-P	IL92-10SX4-P	2000	1-8	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL92-12GX4-P	IL92-12SX4-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-5GX4-P	IL94-5SX4-P	500	5/16-18	1/2	1	2 3/8	5	4	3/16	-	-
IL94-6GX4-P	IL94-6SX4-P	2500	3/8-16	1/2	1	2 3/8	5	4	3/16	-	-
IL94-7GX4-P	IL94-7SX4-P	2500	1/2-13	1/2	1	2 3/8	5	4	3/16	-	-
IL94-8GX4-P	IL94-8SX4-P	2500	5/8-11	5/8	1	2 3/8	5	4	3/16	-	-
IL94-9GX4-P	IL94-9SX4-P	2500	3/4-10	3/4	1	2 3/8	5	4	3/16	-	-
IL94-10GX4-P	IL94-10SX4-P	2500	1-8	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL94-12GX4-P	IL94-12SX4-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-5GX4-H-P	IL96-5SX4-H-P	500	5/16-18	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-6GX4-H-P	IL96-6SX4-H-P	3000	3/8-16	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-7GX4-H-P	IL96-7SX4-H-P	3000	1/2-13	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-8GX4-H-P	IL96-8SX4-H-P	3000	5/8-11	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-9GX4-H-P	IL96-9SX4-H-P	3000	3/4-10	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-10GX4-H-P	IL96-10SX4-H-P	3000	1-8	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL96-12GX4-H-P	IL96-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL98-5GX4-H-P	IL98-5SX4-H-P	500	5/16-18	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-6GX4-H-P	IL98-6SX4-H-P	3000	3/8-16	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-7GX4-H-P	IL98-7SX4-H-P	3000	1/2-13	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-8GX4-H-P	IL98-8SX4-H-P	3000	5/8-11	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-9GX4-H-P	IL98-9SX4-H-P	3000	3/4-10	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-10GX4-H-P	IL98-10SX4-H-P	3000	1-8	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98-12GX4-H-P	IL98-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	5 1/2	4	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 4 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

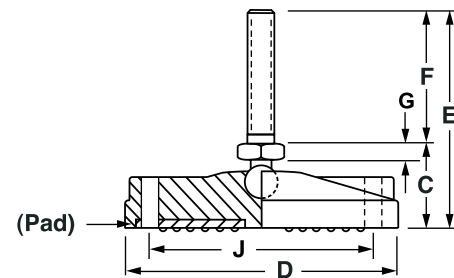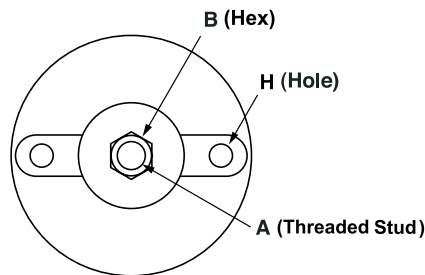**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98A-5GX4-H-P	IL98A-5SX4-H-P	500	5/16-18	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-6GX4-H-P	IL98A-6SX4-H-P	3000	3/8-16	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-7GX4-H-P	IL98A-7SX4-H-P	3000	1/2-13	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-8GX4-H-P	IL98A-8SX4-H-P	3000	5/8-11	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-9GX4-H-P	IL98A-9SX4-H-P	3000	3/4-10	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-10GX4-H-P	IL98A-10SX4-H-P	3000	1-8	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98A-12GX4-H-P	IL98A-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-5GX4-H-P	IL98B-5SX4-H-P	500	5/16-18	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-6GX4-H-P	IL98B-6SX4-H-P	3000	3/8-16	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-7GX4-H-P	IL98B-7SX4-H-P	3000	1/2-13	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-8GX4-H-P	IL98B-8SX4-H-P	3000	5/8-11	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-9GX4-H-P	IL98B-9SX4-H-P	3000	3/4-10	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-10GX4-H-P	IL98B-10SX4-H-P	3000	1-8	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98B-12GX4-H-P	IL98B-12SX4-H-P	7500	1 1/4-7	1 1/4	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-5GX4-H-P	IL98C-5SX4-H-P	500	5/16-18	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-6GX4-H-P	IL98C-6SX4-H-P	3000	3/8-16	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-7GX4-H-P	IL98C-7SX4-H-P	3000	1/2-13	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-8GX4-H-P	IL98C-8SX4-H-P	3000	5/8-11	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-9GX4-H-P	IL98C-9SX4-H-P	3000	3/4-10	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-10GX4-H-P	IL98C-10SX4-H-P	3000	1-8	1	1 1/2	10	5 1/2	4	7/16	.51	8.9
IL98C-12GX4-H-P	IL98C-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	5 1/2	4	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 5 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

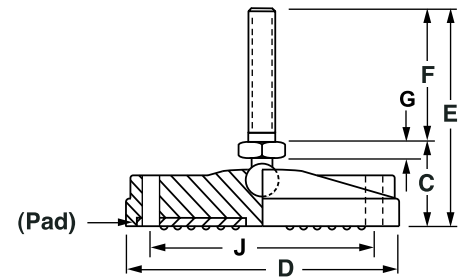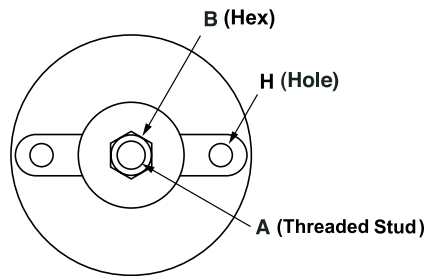

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL92-6GX5-P	IL92-6SX5-P	2000	3/8-16	1/2	1	1 1/2	6	5	3/16	-	-
IL92-7GX5-P	IL92-7SX5-P	2000	1/2-13	1/2	1	1 1/2	6	5	3/16	-	-
IL92-8GX5-P	IL92-8SX5-P	2000	5/8-11	5/8	1	1 1/2	6	5	3/16	-	-
IL92-9GX5-P	IL92-9SX5-P	2000	3/4-10	3/4	1	1 1/2	6	5	3/16	-	-
IL92-10GX5-P	IL92-10SX5-P	2000	1-8	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL92-12GX5-P	IL92-12SX5-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-6GX5-P	IL94-6SX5-P	2500	3/8-16	1/2	1	2 3/8	6	5	3/16	-	-
IL94-7GX5-P	IL94-7SX5-P	2500	1/2-13	1/2	1	2 3/8	6	5	3/16	-	-
IL94-8GX5-P	IL94-8SX5-P	2500	5/8-11	5/8	1	2 3/8	6	5	3/16	-	-
IL94-9GX5-P	IL94-9SX5-P	2500	3/4-10	3/4	1	2 3/8	6	5	3/16	-	-
IL94-10GX5-P	IL94-10SX5-P	2500	1-8	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL94-12GX5-P	IL94-12SX5-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-6GX5-H-P	IL96-6SX5-H-P	3000	3/8-16	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-7GX5-H-P	IL96-7SX5-H-P	3000	1/2-13	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-8GX5-H-P	IL96-8SX5-H-P	3000	5/8-11	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-9GX5-H-P	IL96-9SX5-H-P	3000	3/4-10	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-10GX5-H-P	IL96-10SX5-H-P	3000	1-8	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL96-12GX5-H-P	IL96-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL98-6GX5-H-P	IL98-6SX5-H-P	3000	3/8-16	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-7GX5-H-P	IL98-7SX5-H-P	3000	1/2-13	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-8GX5-H-P	IL98-8SX5-H-P	3000	5/8-11	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-9GX5-H-P	IL98-9SX5-H-P	3000	3/4-10	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-10GX5-H-P	IL98-10SX5-H-P	3000	1-8	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98-12GX5-H-P	IL98-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	6 1/2	5	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 5 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad




The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

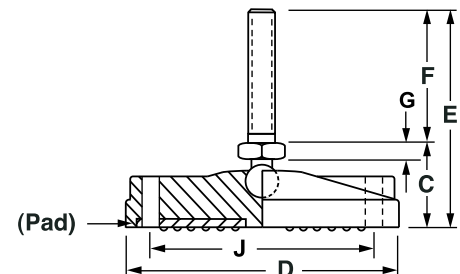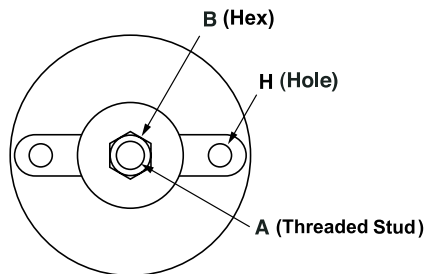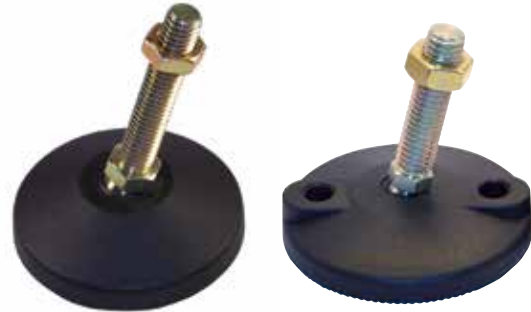

6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98A-6GX5-H-P	IL98A-6SX5-H-P	3000	3/8-16	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-7GX5-H-P	IL98A-7SX5-H-P	3000	1/2-13	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-8GX5-H-P	IL98A-8SX5-H-P	3000	5/8-11	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-9GX5-H-P	IL98A-9SX5-H-P	3000	3/4-10	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-10GX5-H-P	IL98A-10SX5-H-P	3000	1-8	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98A-12GX5-H-P	IL98A-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-6GX5-H-P	IL98B-6SX5-H-P	3000	3/8-16	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-7GX5-H-P	IL98B-7SX5-H-P	3000	1/2-13	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-8GX5-H-P	IL98B-8SX5-H-P	3000	5/8-11	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-9GX5-H-P	IL98B-9SX5-H-P	3000	3/4-10	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-10GX5-H-P	IL98B-10SX5-H-P	3000	1-8	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98B-12GX5-H-P	IL98B-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-6GX5-H-P	IL98C-6SX5-H-P	3000	3/8-16	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-7GX5-H-P	IL98C-7SX5-H-P	3000	1/2-13	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-8GX5-H-P	IL98C-8SX5-H-P	3000	5/8-11	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-9GX5-H-P	IL98C-9SX5-H-P	3000	3/4-10	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-10GX5-H-P	IL98C-10SX5-H-P	3000	1-8	1	1 1/2	10	6 1/2	5	7/16	.51	8.9
IL98C-12GX5-H-P	IL98C-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 6 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

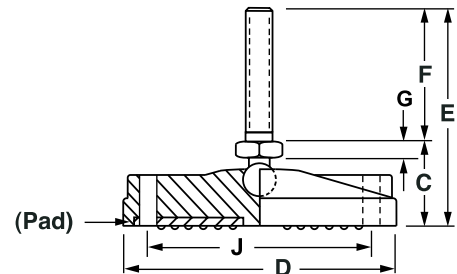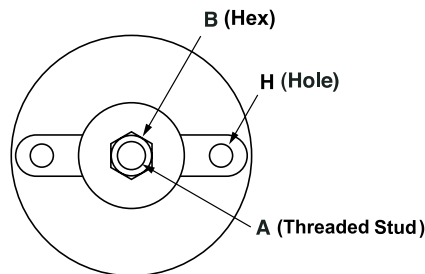**1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL92-6GX6-P	IL92-6SX6-P	2000	3/8-16	1/2	1	1 1/2	7	6	3/16	-	-
IL92-7GX6-P	IL92-7SX6-P	2000	1/2-13	1/2	1	1 1/2	7	6	3/16	-	-
IL92-8GX6-P	IL92-8SX6-P	2000	5/8-11	5/8	1	1 1/2	7	6	3/16	-	-
IL92-9GX6-P	IL92-9SX6-P	2000	3/4-10	3/4	1	1 1/2	7	6	3/16	-	-
IL92-10GX6-P	IL92-10SX6-P	2000	1-8	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL92-12GX6-P	IL92-12SX6-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-6GX6-P	IL94-6SX6-P	2500	3/8-16	1/2	1	2 3/8	7	6	3/16	-	-
IL94-7GX6-P	IL94-7SX6-P	2500	1/2-13	1/2	1	2 3/8	7	6	3/16	-	-
IL94-8GX6-P	IL94-8SX6-P	2500	5/8-11	5/8	1	2 3/8	7	6	3/16	-	-
IL94-9GX6-P	IL94-9SX6-P	2500	3/4-10	3/4	1	2 3/8	7	6	3/16	-	-
IL94-10GX6-P	IL94-10SX6-P	2500	1-8	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL94-12GX6-P	IL94-12SX6-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-6GX6-H-P	IL96-6SX6-H-P	3000	3/8-16	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-7GX6-H-P	IL96-7SX6-H-P	3000	1/2-13	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-8GX6-H-P	IL96-8SX6-H-P	3000	5/8-11	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-9GX6-H-P	IL96-9SX6-H-P	3000	3/4-10	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-10GX6-H-P	IL96-10SX6-H-P	3000	1-8	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL96-12GX6-H-P	IL96-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL98-6GX6-H-P	IL98-6SX6-H-P	3000	3/8-16	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-7GX6-H-P	IL98-7SX6-H-P	3000	1/2-13	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-8GX6-H-P	IL98-8SX6-H-P	3000	5/8-11	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-9GX6-H-P	IL98-9SX6-H-P	3000	3/4-10	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-10GX6-H-P	IL98-10SX6-H-P	3000	1-8	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98-12GX6-H-P	IL98-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	7 1/2	6	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 6 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

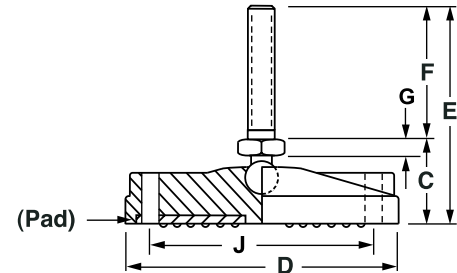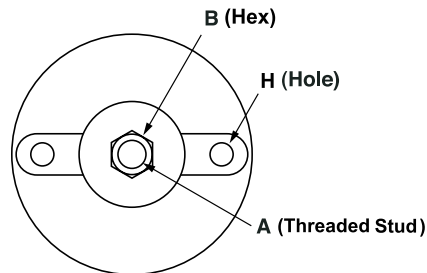

6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL98A-6GX6-H-P	IL98A-6SX6-H-P	3000	3/8-16	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-7GX6-H-P	IL98A-7SX6-H-P	3000	1/2-13	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-8GX6-H-P	IL98A-8SX6-H-P	3000	5/8-11	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-9GX6-H-P	IL98A-9SX6-H-P	3000	3/4-10	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-10GX6-H-P	IL98A-10SX6-H-P	3000	1-8	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98A-12GX6-H-P	IL98A-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-6GX6-H-P	IL98B-6SX6-H-P	3000	3/8-16	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-7GX6-H-P	IL98B-7SX6-H-P	3000	1/2-13	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-8GX6-H-P	IL98B-8SX6-H-P	3000	5/8-11	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-9GX6-H-P	IL98B-9SX6-H-P	3000	3/4-10	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-10GX6-H-P	IL98B-10SX6-H-P	3000	1-8	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98B-12GX6-H-P	IL98B-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-6GX6-H-P	IL98C-6SX6-H-P	3000	3/8-16	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-7GX6-H-P	IL98C-7SX6-H-P	3000	1/2-13	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-8GX6-H-P	IL98C-8SX6-H-P	3000	5/8-11	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-9GX6-H-P	IL98C-9SX6-H-P	3000	3/4-10	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-10GX6-H-P	IL98C-10SX6-H-P	3000	1-8	1	1 1/2	10	7 1/2	6	7/16	.51	8.9
IL98C-12GX6-H-P	IL98C-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	7 1/2	6	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 8 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

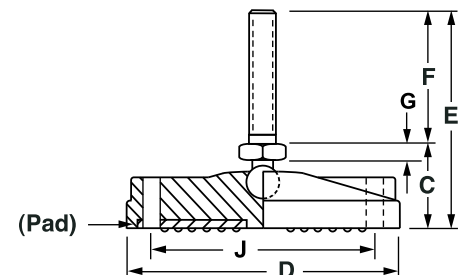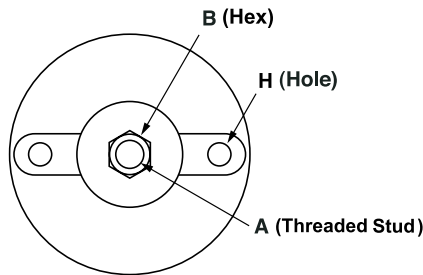

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL92-7GX8-P	IL92-7SX8-P	2000	1/2-13	1/2	1	1 1/2	9	8	3/16	-	-
IL92-8GX8-P	IL92-8SX8-P	2000	5/8-11	5/8	1	1 1/2	9	8	3/16	-	-
IL92-9GX8-P	IL92-9SX8-P	2000	3/4-10	3/4	1	1 1/2	9	8	3/16	-	-
IL92-10GX8-P	IL92-10SX8-P	2000	1-8	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL92-12GX8-P	IL92-12SX8-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-7GX8-P	IL94-7SX8-P	2500	1/2-13	1/2	1	2 3/8	9	8	3/16	-	-
IL94-8GX8-P	IL94-8SX8-P	2500	5/8-11	5/8	1	2 3/8	9	8	3/16	-	-
IL94-9GX8-P	IL94-9SX8-P	2500	3/4-10	3/4	1	2 3/8	9	8	3/16	-	-
IL94-10GX8-P	IL94-10SX8-P	2500	1-8	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL94-12GX8-P	IL94-12SX8-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-7GX8-H-P	IL96-7SX8-H-P	3000	1/2-13	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-8GX8-H-P	IL96-8SX8-H-P	3000	5/8-11	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-9GX8-H-P	IL96-9SX8-H-P	3000	3/4-10	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-10GX8-H-P	IL96-10SX8-H-P	3000	1-8	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL96-12GX8-H-P	IL96-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL98-7GX8-H-P	IL98-7SX8-H-P	3000	1/2-13	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-8GX8-H-P	IL98-8SX8-H-P	3000	5/8-11	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-9GX8-H-P	IL98-9SX8-H-P	3000	3/4-10	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-10GX8-H-P	IL98-10SX8-H-P	3000	1-8	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98-12GX8-H-P	IL98-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	9 1/2	8	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 8 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

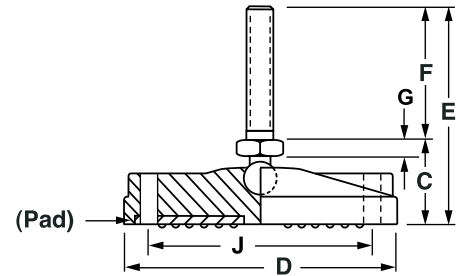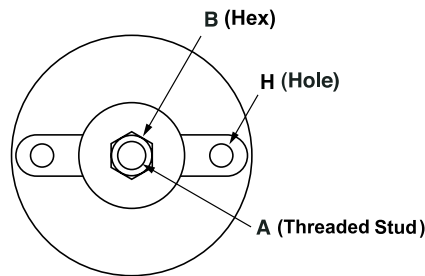

6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL98A-7GX8-H-P	IL98A-7SX8-H-P	3000	1/2-13	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-8GX8-H-P	IL98A-8SX8-H-P	3000	5/8-11	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-9GX8-H-P	IL98A-9SX8-H-P	3000	3/4-10	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-10GX8-H-P	IL98A-10SX8-H-P	3000	1-8	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98A-12GX8-H-P	IL98A-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-7GX8-H-P	IL98B-7SX8-H-P	3000	1/2-13	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-8GX8-H-P	IL98B-8SX8-H-P	3000	5/8-11	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-9GX8-H-P	IL98B-9SX8-H-P	3000	3/4-10	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-10GX8-H-P	IL98B-10SX8-H-P	3000	1-8	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98B-12GX8-H-P	IL98B-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-7GX8-H-P	IL98C-7SX8-H-P	3000	1/2-13	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-8GX8-H-P	IL98C-8SX8-H-P	3000	5/8-11	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-9GX8-H-P	IL98C-9SX8-H-P	3000	3/4-10	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-10GX8-H-P	IL98C-10SX8-H-P	3000	1-8	1	1 1/2	10	9 1/2	8	7/16	.51	8.9
IL98C-12GX8-H-P	IL98C-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL****METRIC - 1" & 2" STUD****NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

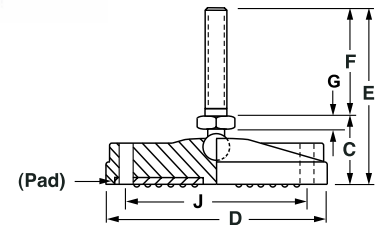**Metric Threads: 1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL92-M6Gx1-P	IL92-M6Sx1-P	100	M6X1	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M8Gx1-P	IL92-M8Sx1-P	500	M8X1.25	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M6G-P	IL92-M6S-P	100	M6X1	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M8G-P	IL92-M8S-P	500	M8X1.25	1/2	1	1-1/2	2	2	3/16	-	-
IL92-M10G-P	IL92-M10S-P	2000	M10X1.50	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M12G-P	IL92-M12S-P	2000	M12X1.75	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M16G-P	IL92-M16S-P	2000	M16X2.00	5/8	1	1-1/2	3	2	3/16	-	-
IL92-M20G-P	IL92-M20S-P	2000	M20X2.50	3/4	1	1-1/2	3	2	3/16	-	-
IL92-M24G-P	IL92-M24S-P	2000	M24X3.00	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-M6Gx1-P	IL94-M6Sx1-P	100	M6X1	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M8Gx1-P	IL94-M8Sx1-P	500	M8X1.25	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M6G-P	IL94-M6S-P	100	M6X1	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M8G-P	IL94-M8S-P	500	M8X1.25	1/2	1	2-3/8	2	2	3/16	-	-
IL94-M10G-P	IL94-M10S-P	2500	M10X1.50	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M12G-P	IL94-M12S-P	2500	M12X1.75	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M16G-P	IL94-M16S-P	2500	M16X2.00	5/8	1	2-3/8	3	2	3/16	-	-
IL94-M20G-P	IL94-M20S-P	2500	M20X2.50	3/4	1	2-3/8	3	2	3/16	-	-
IL94-M24G-P	IL94-M24S-P	2500	M24X3.00	1	1-1/4	2-3/8	3-1/4	2	7/16	-	-
IL96-M6Gx1-H-P	IL96-M6Sx1-H-P	100	M6X1	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M8Gx1-H-P	IL96-M8Sx1-H-P	500	M8X1.25	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M6G-H-P	IL96-M6S-H-P	100	M6X1	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M8G-H-P	IL96-M8S-H-P	500	M8X1.25	1/2	1	3-1/8	2	2	3/16	.39	2.2
IL96-M10G-H-P	IL96-M10S-H-P	3000	M10X1.50	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M12G-H-P	IL96-M12S-H-P	3000	M12X1.75	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M16G-H-P	IL96-M16S-H-P	3000	M16X2.00	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-M20G-H-P	IL96-M20S-H-P	3000	M20X2.50	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-M24G-H-P	IL96-M24S-H-P	3000	M24X3.00	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL98-M6Gx1-H-P	IL98-M6Sx1-H-P	100	M6X1	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M8Gx1-H-P	IL98-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M6G-H-P	IL98-M6S-H-P	100	M6X1	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M8G-H-P	IL98-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	2	3/16	.51	2.9
IL98-M10G-H-P	IL98-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M12G-H-P	IL98-M12S-H-P	3000	M12X1.75	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M16G-H-P	IL98-M16S-H-P	3000	M16X2.00	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M20G-H-P	IL98-M20S-H-P	3000	M20X2.50	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M24G-H-P	IL98-M24S-H-P	3000	M24X3.00	1	1-1/2	4	3-1/2	2	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size						
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL****METRIC - 1" & 2" STUD****NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

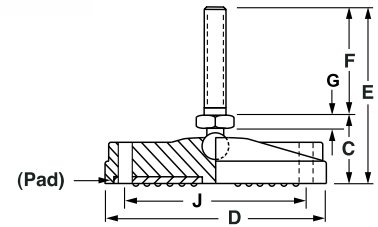**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98A-M6Gx1-H-P	IL98A-M6Sx1-H-P	100	M6X1	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M8Gx1-H-P	IL98A-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M6G-H-P	IL98A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M8G-H-P	IL98A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M10G-H-P	IL98A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M12G-H-P	IL98A-M12S-H-P	3000	M12X1.75	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M16G-H-P	IL98A-M16S-H-P	3000	M16X2.00	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M20G-H-P	IL98A-M20S-H-P	3000	M20X2.50	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M24G-H-P	IL98A-M24S-H-P	3000	M24X3.00	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-M6Gx1-H-P	IL98B-M6Sx1-H-P	100	M6X1	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M8Gx1-H-P	IL98B-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M6G-H-P	IL98B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M8G-H-P	IL98B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M10G-H-P	IL98B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M12G-H-P	IL98B-M12S-H-P	3000	M12X1.75	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M16G-H-P	IL98B-M16S-H-P	3000	M16X2.00	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M20G-H-P	IL98B-M20S-H-P	3000	M20X2.50	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M24G-H-P	IL98B-M24S-H-P	3000	M24X3.00	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-M6Gx1-H-P	IL98C-M6Sx1-H-P	100	M6X1	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M8Gx1-H-P	IL98C-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M6G-H-P	IL98C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M8G-H-P	IL98C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M10G-H-P	IL98C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M12G-H-P	IL98C-M12S-H-P	3000	M12X1.75	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M16G-H-P	IL98C-M16S-H-P	3000	M16X2.00	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M20G-H-P	IL98C-M20S-H-P	3000	M20X2.50	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M24G-H-P	IL98C-M24S-H-P	3000	M24X3.00	1	1-1/2	10	3-1/2	2	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

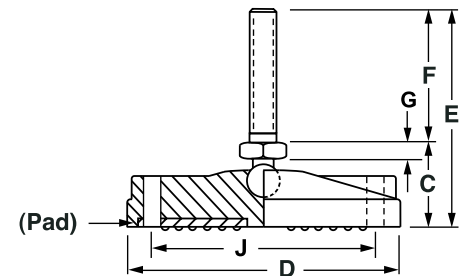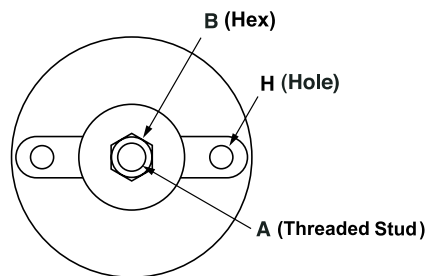**Metric Threads: 1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL92-M6GX3-P	IL92-M6SX3-P	100	M6X1	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M8GX3-P	IL92-M8SX3-P	500	M8X1.25	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M10GX3-P	IL92-M10SX3-P	2000	M10X1.50	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M12GX3-P	IL92-M12SX3-P	2000	M12X1.75	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M16GX3-P	IL92-M16SX3-P	2000	M16X2.00	5/8	1	1 1/2	4	3	3/16	-	-
IL92-M20GX3-P	IL92-M20SX3-P	2000	M20X2.50	3/4	1	1 1/2	4	3	3/16	-	-
IL92-M24GX3-P	IL92-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-M6GX3-P	IL94-M6SX3-P	100	M6X1	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M8GX3-P	IL94-M8SX3-P	500	M8X1.25	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M10GX3-P	IL94-M10SX3-P	2500	M10X1.50	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M12GX3-P	IL94-M12SX3-P	2500	M12X1.75	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M16GX3-P	IL94-M16SX3-P	2500	M16X2.00	5/8	1	2 3/8	4	3	3/16	-	-
IL94-M20GX3-P	IL94-M20SX3-P	2500	M20X2.50	3/4	1	2 3/8	4	3	3/16	-	-
IL94-M24GX3-P	IL94-M24SX3-P	2500	M24X3.00	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-M6GX3-H-P	IL96-M6SX3-H-P	100	M6X1	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M8GX3-H-P	IL96-M8SX3-H-P	500	M8X1.25	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M10GX3-H-P	IL96-M10SX3-H-P	3000	M10X1.50	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M12GX3-H-P	IL96-M12SX3-H-P	3000	M12X1.75	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M16GX3-H-P	IL96-M16SX3-H-P	3000	M16X2.00	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-M20GX3-H-P	IL96-M20SX3-H-P	3000	M20X2.50	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-M24GX3-H-P	IL96-M24SX3-H-P	3000	M24X3.00	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL98-M6GX3-H-P	IL98-M6SX3-H-P	100	M6X1	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M8GX3-H-P	IL98-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M10GX3-H-P	IL98-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M12GX3-H-P	IL98-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M16GX3-H-P	IL98-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M20GX3-H-P	IL98-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M24GX3-H-P	IL98-M24SX3-H-P	3000	M24X3.00	1	1 1/2	4	4 1/2	3	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

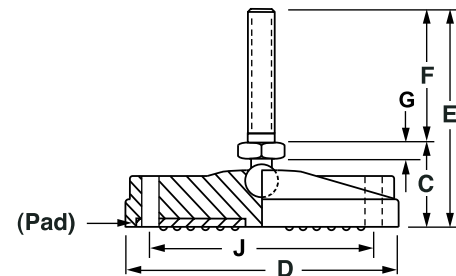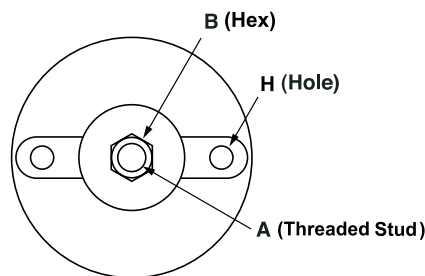**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98A-M6GX3-H-P	IL98A-M6SX3-H-P	100	M6X1	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M8GX3-H-P	IL98A-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M10GX3-H-P	IL98A-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M12GX3-H-P	IL98A-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M16GX3-H-P	IL98A-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M20GX3-H-P	IL98A-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M24GX3-H-P	IL98A-M24SX3-H-P	3000	M24X3.00	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-M6GX3-H-P	IL98B-M6SX3-H-P	100	M6X1	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M8GX3-H-P	IL98B-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M10GX3-H-P	IL98B-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M12GX3-H-P	IL98B-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M16GX3-H-P	IL98B-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M20GX3-H-P	IL98B-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M24GX3-H-P	IL98B-M24SX3-H-P	3000	M24X3.00	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-M6GX3-H-P	IL98C-M6SX3-H-P	100	M6X1	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M8GX3-H-P	IL98C-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M10GX3-H-P	IL98C-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M12GX3-H-P	IL98C-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M16GX3-H-P	IL98C-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M20GX3-H-P	IL98C-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M24GX3-H-P	IL98C-M24SX3-H-P	3000	M24X3.00	1	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

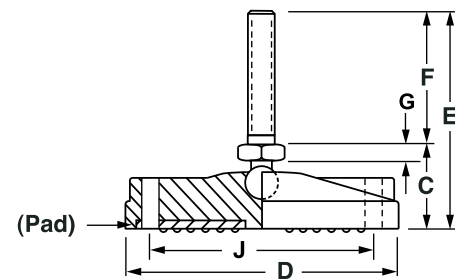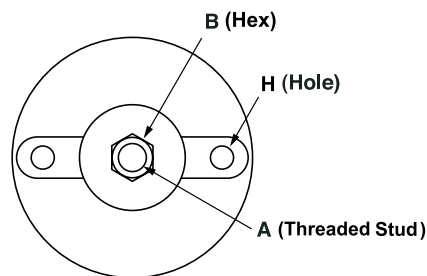

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL92-M8GX4-P	IL92-M8SX4-P	500	M8X1.25	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M10GX4-P	IL92-M10SX4-P	2000	M10X1.50	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M12GX4-P	IL92-M12SX4-P	2000	M12X1.75	5/8	1	1 1/2	5	4	3/16	-	-
IL92-M16GX4-P	IL92-M16SX4-P	2000	M16X2.00	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M20GX4-P	IL92-M20SX4-P	2000	M20X2.50	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M24GX4-P	IL92-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-M8GX4-P	IL94-M8SX4-P	500	M8X1.25	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M10GX4-P	IL94-M10SX4-P	2500	M10X1.50	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M12GX4-P	IL94-M12SX4-P	2500	M12X1.75	5/8	1	2 3/8	5	4	3/16	-	-
IL94-M16GX4-P	IL94-M16SX4-P	2500	M16X2.00	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M20GX4-P	IL94-M20SX4-P	2500	M20X2.50	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M24GX4-P	IL94-M24SX4-P	2500	M24X3.00	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-M8GX4-H-P	IL96-M8SX4-H-P	500	M8X1.25	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M10GX4-H-P	IL96-M10SX4-H-P	3000	M10X1.50	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M12GX4-H-P	IL96-M12SX4-H-P	3000	M12X1.75	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-M16GX4-H-P	IL96-M16SX4-H-P	3000	M16X2.00	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M20GX4-H-P	IL96-M20SX4-H-P	3000	M20X2.50	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M24GX4-H-P	IL96-M24SX4-H-P	3000	M24X3.00	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL98-M8GX4-H-P	IL98-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M10GX4-H-P	IL98-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M12GX4-H-P	IL98-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M16GX4-H-P	IL98-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M20GX4-H-P	IL98-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M24GX4-H-P	IL98-M24SX4-H-P	3000	M24X3.00	1	1 1/2	4	5 1/2	4	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

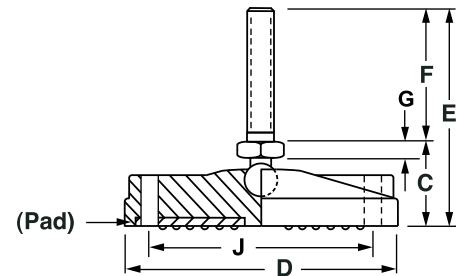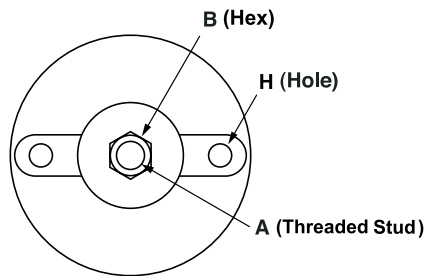

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98A-M8GX4-H-P	IL98A-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M10GX4-H-P	IL98A-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M12GX4-H-P	IL98A-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M16GX4-H-P	IL98A-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M20GX4-H-P	IL98A-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M24GX4-H-P	IL98A-M24SX4-H-P	3000	M24X3.00	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-M8GX4-H-P	IL98B-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M10GX4-H-P	IL98B-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M12GX4-H-P	IL98B-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M16GX4-H-P	IL98B-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M20GX4-H-P	IL98B-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M24GX4-H-P	IL98B-M24SX4-H-P	3000	M24X3.00	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-M8GX4-H-P	IL98C-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M10GX4-H-P	IL98C-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M12GX4-H-P	IL98C-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M16GX4-H-P	IL98C-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M20GX4-H-P	IL98C-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M24GX4-H-P	IL98C-M24SX4-H-P	3000	M24X3.00	1	1 1/2	10	5 1/2	4	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

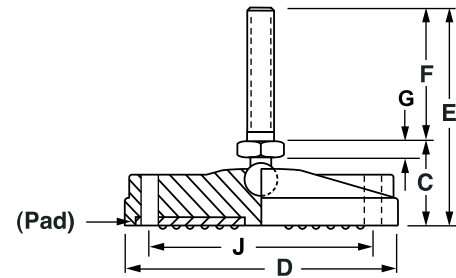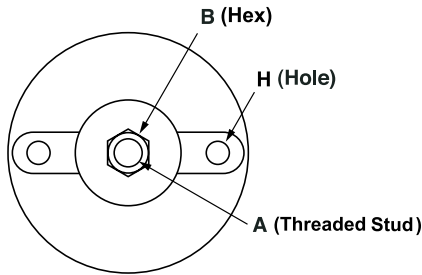**Metric Threads: 1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL92-M10GX5-P	IL92-M10SX5-P	2000	M10X1.50	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M12GX5-P	IL92-M12SX5-P	2000	M12X1.75	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M16GX5-P	IL92-M16SX5-P	2000	M16X2.00	5/8	1	1 1/2	6	5	3/16	-	-
IL92-M20GX5-P	IL92-M20SX5-P	2000	M20X2.50	3/4	1	1 1/2	6	5	3/16	-	-
IL92-M24GX5-P	IL92-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-M10GX5-P	IL94-M10SX5-P	2500	M10X1.50	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M12GX5-P	IL94-M12SX5-P	2500	M12X1.75	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M16GX5-P	IL94-M16SX5-P	2500	M16X2.00	5/8	1	2 3/8	6	5	3/16	-	-
IL94-M20GX5-P	IL94-M20SX5-P	2500	M20X2.50	3/4	1	2 3/8	6	5	3/16	-	-
IL94-M24GX5-P	IL94-M24SX5-P	2500	M24X3.00	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-M10GX5-H-P	IL96-M10SX5-H-P	3000	M10X1.50	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M12GX5-H-P	IL96-M12SX5-H-P	3000	M12X1.75	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M16GX5-H-P	IL96-M16SX5-H-P	3000	M16X2.00	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-M20GX5-H-P	IL96-M20SX5-H-P	3000	M20X2.50	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-M24GX5-H-P	IL96-M24SX5-H-P	3000	M24X3.00	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL98-M10GX5-H-P	IL98-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M12GX5-H-P	IL98-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M16GX5-H-P	IL98-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M20GX5-H-P	IL98-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M24GX5-H-P	IL98-M24SX5-H-P	3000	M24X3.00	1	1 1/2	4	6 1/2	5	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

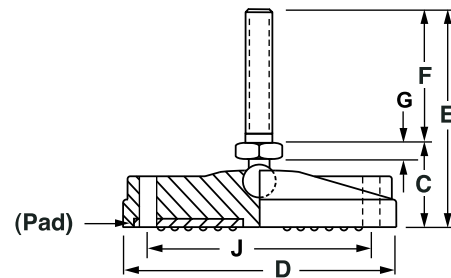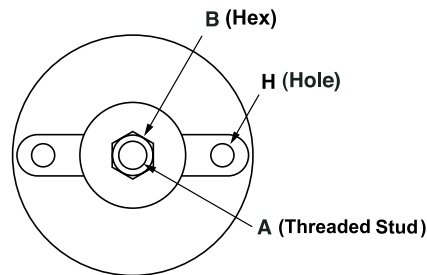

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98A-M10GX5-H-P	IL98A-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M12GX5-H-P	IL98A-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M16GX5-H-P	IL98A-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M20GX5-H-P	IL98A-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M24GX5-H-P	IL98A-M24SX5-H-P	3000	M24X3.00	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-M10GX5-H-P	IL98B-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M12GX5-H-P	IL98B-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M16GX5-H-P	IL98B-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M20GX5-H-P	IL98B-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M24GX5-H-P	IL98B-M24SX5-H-P	3000	M24X3.00	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-M10GX5-H-P	IL98C-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M12GX5-H-P	IL98C-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M16GX5-H-P	IL98C-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M20GX5-H-P	IL98C-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M24GX5-H-P	IL98C-M24SX5-H-P	3000	M24X3.00	1	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.




Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

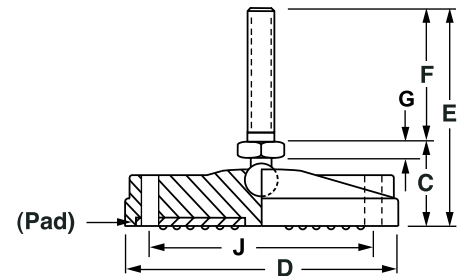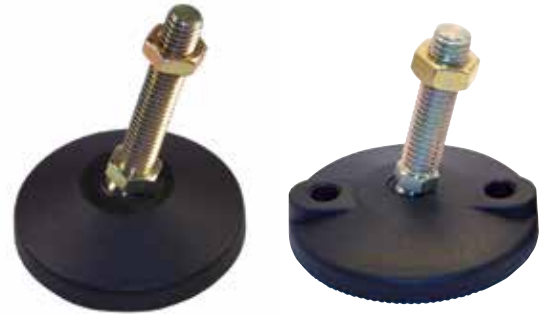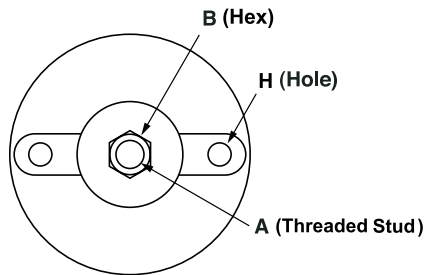

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL92-M10GX6-P	IL92-M10SX6-P	2000	M10X1.50	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M12GX6-P	IL92-M12SX6-P	2000	M12X1.75	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M16GX6-P	IL92-M16SX6-P	2000	M16X2.00	5/8	1	1 1/2	7	6	3/16	-	-
IL92-M20GX6-P	IL92-M20SX6-P	2000	M20X2.50	3/4	1	1 1/2	7	6	3/16	-	-
IL92-M24GX6-P	IL92-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-M10GX6-P	IL94-M10SX6-P	2500	M10X1.50	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M12GX6-P	IL94-M12SX6-P	2500	M12X1.75	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M16GX6-P	IL94-M16SX6-P	2500	M16X2.00	5/8	1	2 3/8	7	6	3/16	-	-
IL94-M20GX6-P	IL94-M20SX6-P	2500	M20X2.50	3/4	1	2 3/8	7	6	3/16	-	-
IL94-M24GX6-P	IL94-M24SX6-P	2500	M24X3.00	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-M10GX6-H-P	IL96-M10SX6-H-P	3000	M10X1.50	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M12GX6-H-P	IL96-M12SX6-H-P	3000	M12X1.75	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M16GX6-H-P	IL96-M16SX6-H-P	3000	M16X2.00	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-M20GX6-H-P	IL96-M20SX6-H-P	3000	M20X2.50	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M24GX6-H-P	IL96-M24SX6-H-P	3000	M24X3.00	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL98-M10GX6-H-P	IL98-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M12GX6-H-P	IL98-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M16GX6-H-P	IL98-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M20GX6-H-P	IL98-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M24GX6-H-P	IL98-M24SX6-H-P	3000	M24X3.00	1	1 1/2	4	7 1/2	6	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

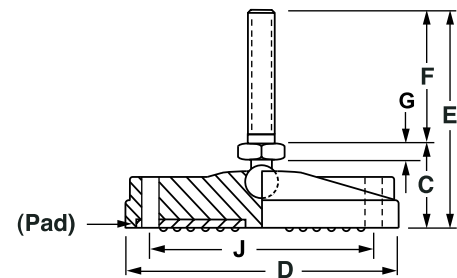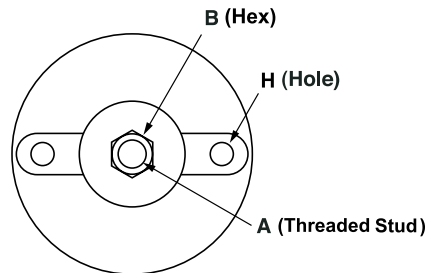**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL98A-M10GX6-H-P	IL98A-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M12GX6-H-P	IL98A-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M16GX6-H-P	IL98A-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M20GX6-H-P	IL98A-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M24GX6-H-P	IL98A-M24SX6-H-P	3000	M24X3.00	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-M10GX6-H-P	IL98B-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M12GX6-H-P	IL98B-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M16GX6-H-P	IL98B-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M20GX6-H-P	IL98B-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M24GX6-H-P	IL98B-M24SX6-H-P	3000	M24X3.00	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-M10GX6-H-P	IL98C-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M12GX6-H-P	IL98C-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M16GX6-H-P	IL98C-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M20GX6-H-P	IL98C-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M24GX6-H-P	IL98C-M24SX6-H-P	3000	M24X3.00	1	1 1/2	10	7 1/2	6	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

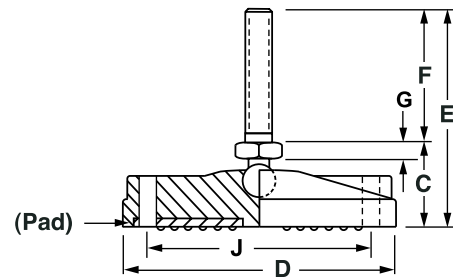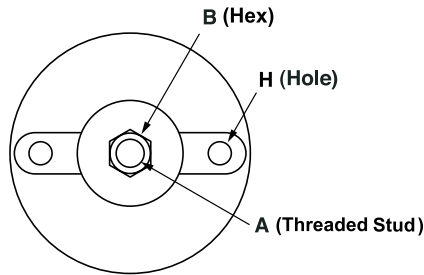

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL92-M12GX8-P	IL92-M12SX8-P	2000	M12X1.75	1/2	1	1 1/2	9	8	3/16	-	-
IL92-M16GX8-P	IL92-M16SX8-P	2000	M16X2.00	5/8	1	1 1/2	9	8	3/16	-	-
IL92-M20GX8-P	IL92-M20SX8-P	2000	M20X2.50	3/4	1	1 1/2	9	8	3/16	-	-
IL92-M24GX8-P	IL92-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-M12GX8-P	IL94-M12SX8-P	2500	M12X1.75	1/2	1	2 3/8	9	8	3/16	-	-
IL94-M16GX8-P	IL94-M16SX8-P	2500	M16X2.00	5/8	1	2 3/8	9	8	3/16	-	-
IL94-M20GX8-P	IL94-M20SX8-P	2500	M20X2.50	3/4	1	2 3/8	9	8	3/16	-	-
IL94-M24GX8-P	IL94-M24SX8-P	2500	M24X3.00	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-M12GX8-H-P	IL96-M12SX8-H-P	3000	M12X1.75	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-M16GX8-H-P	IL96-M16SX8-H-P	3000	M16X2.00	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-M20GX8-H-P	IL96-M20SX8-H-P	3000	M20X2.50	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-M24GX8-H-P	IL96-M24SX8-H-P	3000	M24X3.00	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL98-M12GX8-H-P	IL98-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M16GX8-H-P	IL98-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M20GX8-H-P	IL98-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M24GX8-H-P	IL98-M24SX8-H-P	3000	M24X3.00	1	1 1/2	4	9 1/2	8	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

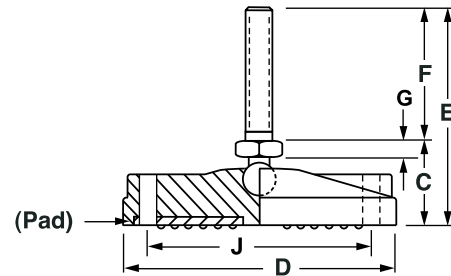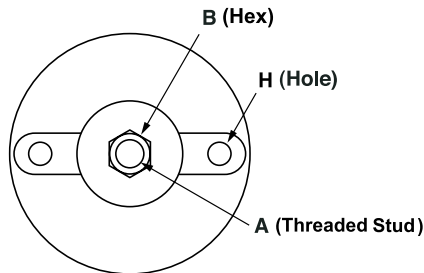

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL98A-M12GX8-H-P	IL98A-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M16GX8-H-P	IL98A-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M20GX8-H-P	IL98A-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M24GX8-H-P	IL98A-M24SX8-H-P	3000	M24X3.00	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-M12GX8-H-P	IL98B-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M16GX8-H-P	IL98B-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M20GX8-H-P	IL98B-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M24GX8-H-P	IL98B-M24SX8-H-P	3000	M24X3.00	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-M12GX8-H-P	IL98C-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M16GX8-H-P	IL98C-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M20GX8-H-P	IL98C-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M24GX8-H-P	IL98C-M24SX8-H-P	3000	M24X3.00	1	1 1/2	10	9 1/2	8	7/16	.51	8.9


"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



THREADED TUBE ENDS


These round, square and rectangular threaded tube ends are made of fiberglass reinforced black nylon material with a brass threaded insert. Many more threaded tube ends, weld nuts, t-nuts for wood applications, corner and side brackets can be found in our *Light Duty Levelers* catalog.

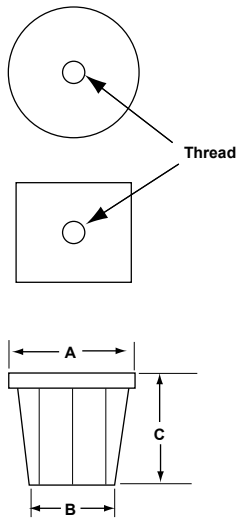

P/N (round)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27-R7N	1/2-13	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R8N	5/8-11	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R9N	3/4-10	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-RM16N	M16	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R7N5	1/2-13	1000	2	1.78	2	SCH.5	.065
IL27-R8N5	5/8-11	1000	2	1.78	2	SCH.5	.065
IL27-R9N5	3/4-10	1000	2	1.78	2	SCH.5	.065
IL27-RM16N5	M16	1000	2	1.78	2	SCH.5	.065
IL27-R7N10	1/2-13	1000	2	1.69	2	SCH.10	.109
IL27-R8N10	5/8-11	1000	2	1.69	2	SCH.10	.109
IL27-R9N10	3/4-10	1760	2	1.69	2	SCH.10	.109
IL27-RM16N10	M16	1760	2	1.69	2	SCH.10	.109
IL27A-R7N	1/2-13	1000	2	1.91	2	16GA	.065-.075
IL27A-R8N	5/8-11	1000	2	1.91	2	16GA	.065-.075
IL27A-R9N	3/4-10	1760	2	1.91	2	16GA	.065-.075
IL27A-RM16N	M16	1760	2	1.91	2	16GA	.065-.075

P/N (square)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27-7N	1/2-13	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-8N	5/8-11	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-9N	3/4-10	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-M16N	M16	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-7N2	1/2-13	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-8N2	5/8-11	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-9N2	3/4-10	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-M16N2	M16	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27A-7N	1/2-13	1000	2	1.87	2	16GA	.065-.075
IL27A-8N	5/8-11	1000	2	1.87	2	16GA	.065-.075
IL27A-9N	3/4-10	1760	2	1.87	2	16GA	.065-.075
IL27A-M16N	M16	1760	2	1.87	2	16GA	.065-.075
IL27A-7N2	1/2-13	1000	2	1.78	2	11GA	.109-.120
IL27A-8N2	5/8-11	1000	2	1.78	2	11GA	.109-.120
IL27A-9N2	3/4-10	1760	2	1.78	2	11GA	.109-.120
IL27A-M16N2	M16	1760	2	1.78	2	11GA	.109-.120

P/N (rect.)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27A-RE-7N2	1/2-13	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-8N2	5/8-11	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-9N2	3/4-10	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-M16N2	M16x2.0	1760	2X3	1.78	1-1/2	11GA	.125



NOTES

33



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com


MEDIUM-DUTY LEVELERS

POLY SWIVEL

LOW PROFILE SOCKET

LOW PROFILE POLY SWIVEL SOCKET LEVELERS

The IEC Poly Base Steel and Stainless Steel Swivel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: 1/2-13, 5/8-11, 3/4-10, 1-8

Nut Height: "G" = 3/16"
for Threads: 1/4-20, 5/16-18, 3/8-16

LOW PROFILE POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-4G	IL51-4S	100	1/4-20	1/2	5/8	1	3/8	3/16
IL51-5G	IL51-5S	500	5/16-18	1/2	5/8	1	3/8	3/16
IL51-6G	IL51-6S	1000	3/8-16	1/2	5/8	1	3/8	3/16
IL51-7G	IL51-7S	2000	1/2-13	5/8	15/16	1	3/8	1/2
IL51-8G	IL51-8S	3000	5/8-11	3/4	1-1/8	1	1/2	5/8
IL51-9G	IL51-9S	3000	3/4-10	1	1-3/16	1	9/16	11/16
IL51-10G	IL51-10S	3000	1-8	1-1/4	1-1/4	1	5/8	3/4
IL53-4G	IL53-4S	100	1/4-20	1/2	5/8	1 1/2	3/8	3/16
IL53-5G	IL53-5S	500	5/16-18	1/2	5/8	1 1/2	3/8	3/16
IL53-6G	IL53-6S	1000	3/8-16	1/2	5/8	1 1/2	3/8	3/16
IL53-7G	IL53-7S	2000	1/2-13	5/8	15/16	1 1/2	3/8	1/2
IL53-8G	IL53-8S	3000	5/8-11	3/4	1-1/8	1 1/2	1/2	5/8
IL53-9G	IL53-9S	3000	3/4-10	1	1-3/16	1 1/2	9/16	11/16
IL53-10G	IL53-10S	3000	1-8	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-4G	IL55-4S	100	1/4-20	1/2	5/8	2	3/8	3/16
IL55-5G	IL55-5S	500	5/16-18	1/2	5/8	2	3/8	3/16
IL55-6G	IL55-6S	1000	3/8-16	1/2	5/8	2	3/8	3/16
IL55-7G	IL55-7S	2000	1/2-13	5/8	15/16	2	3/8	1/2
IL55-8G	IL55-8S	3000	5/8-11	3/4	1-1/8	2	1/2	5/8
IL55-9G	IL55-9S	3000	3/4-10	1	1-3/16	2	9/16	11/16
IL55-10G	IL55-10S	3000	1-8	1-1/4	1-1/4	2	5/8	3/4
IL57-4G	IL57-4S	100	1/4-20	1/2	5/8	3	3/8	3/16
IL57-5G	IL57-5S	500	5/16-18	1/2	5/8	3	3/8	3/16
IL57-6G	IL57-6S	1000	3/8-16	1/2	5/8	3	3/8	3/16
IL57-7G	IL57-7S	2000	1/2-13	5/8	15/16	3	3/8	1/2
IL57-8G	IL57-8S	3000	5/8-11	3/4	1-1/8	3	1/2	5/8
IL57-9G	IL57-9S	3000	3/4-10	1	1-3/16	3	9/16	11/16
IL57-10G	IL57-10S	3000	1-8	1-1/4	1-1/4	3	5/8	3/4
IL59-4G	IL59-4S	100	1/4-20	1/2	5/8	4	3/8	3/16
IL59-5G	IL59-5S	500	5/16-18	1/2	5/8	4	3/8	3/16
IL59-6G	IL59-6S	1000	3/8-16	1/2	5/8	4	3/8	3/16
IL59-7G	IL59-7S	2000	1/2-13	5/8	15/16	4	3/8	1/2
IL59-8G	IL59-8S	3000	5/8-11	3/4	1-1/8	4	1/2	5/8
IL59-9G	IL59-9S	3000	3/4-10	1	1-3/16	4	9/16	11/16
IL59-10G	IL59-10S	3000	1-8	1-1/4	1-1/4	4	5/8	3/4



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com


MEDIUM-DUTY LEVELERS

POLY SWIVEL

LP METRIC SOCKET

**LOW PROFILE METRIC POLY SWIVEL
SOCKET LEVELERS**

The IEC Poly Base Steel and Stainless Steel Swivel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: M12, M16, M20, M24

Nut Height: "G" = 3/16"
for Threads: M6, M8, M10

LOW PROFILE METRIC POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-M6G	IL51-M6S	100	M6X1	1/2	5/8	1	3/8	3/16
IL51-M8G	IL51-M8S	500	M8X1.25	1/2	5/8	1	3/8	3/16
IL51-M10G	IL51-M10S	1000	M10X1.50	1/2	5/8	1	3/8	3/16
IL51-M12G	IL51-M12S	2000	M12X1.75	5/8	15/16	1	3/8	1/2
IL51-M16G	IL51-M16S	3000	M16X2.00	3/4	1-1/8	1	1/2	5/8
IL51-M20G	IL51-M20S	3000	M20X2.50	1	1-3/16	1	9/16	11/16
IL51-M24G	IL51-M24S	3000	M24X3.00	1-1/4	1-1/4	1	5/8	3/4
IL53-M6G	IL53-M6S	100	M6X1	1/2	5/8	1 1/2	3/8	3/16
IL53-M8G	IL53-M8S	500	M8X1.25	1/2	5/8	1 1/2	3/8	3/16
IL53-M10G	IL53-M10S	1000	M10X1.50	1/2	5/8	1 1/2	3/8	3/16
IL53-M12G	IL53-M12S	2000	M12X1.75	5/8	15/16	1 1/2	3/8	1/2
IL53-M16G	IL53-M16S	3000	M16X2.00	3/4	1-1/8	1 1/2	1/2	5/8
IL53-M20G	IL53-M20S	3000	M20X2.50	1	1-3/16	1 1/2	9/16	11/16
IL53-M24G	IL53-M24S	3000	M24X3.00	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-M6G	IL55-M6S	100	M6X1	1/2	5/8	2	3/8	3/16
IL55-M8G	IL55-M8S	500	M8X1.25	1/2	5/8	2	3/8	3/16
IL55-M10G	IL55-M10S	1000	M10X1.50	1/2	5/8	2	3/8	3/16
IL55-M12G	IL55-M12S	2000	M12X1.75	5/8	15/16	2	3/8	1/2
IL55-M16G	IL55-M16S	3000	M16X2.00	3/4	1-1/8	2	1/2	5/8
IL55-M20G	IL55-M20S	3000	M20X2.50	1	1-3/16	2	9/16	11/16
IL55-M24G	IL55-M24S	3000	M24X3.00	1-1/4	1-1/4	2	5/8	3/4
IL57-M6G	IL57-M6S	100	M6X1	1/2	5/8	3	3/8	3/16
IL57-M8G	IL57-M8S	500	M8X1.25	1/2	5/8	3	3/8	3/16
IL57-M10G	IL57-M10S	1000	M10X1.50	1/2	5/8	3	3/8	3/16
IL57-M12G	IL57-M12S	2000	M12X1.75	5/8	15/16	3	3/8	1/2
IL57-M16G	IL57-M16S	3000	M16X2.00	3/4	1-1/8	3	1/2	5/8
IL57-M20G	IL57-M20S	3000	M20X2.50	1	1-3/16	3	9/16	11/16
IL57-M24G	IL57-M24S	3000	M24X3.00	1-1/4	1-1/4	3	5/8	3/4
IL59-M6G	IL59-M6S	100	M6X1	1/2	5/8	4	3/8	3/16
IL59-M8G	IL59-M8S	500	M8X1.25	1/2	5/8	4	3/8	3/16
IL59-M10G	IL59-M10S	1000	M10X1.50	1/2	5/8	4	3/8	3/16
IL59-M12G	IL59-M12S	2000	M12X1.75	5/8	15/16	4	3/8	1/2
IL59-M16G	IL59-M16S	3000	M16X2.00	3/4	1-1/8	4	1/2	5/8
IL59-M20G	IL59-M20S	3000	M20X2.50	1	1-3/16	4	9/16	11/16
IL59-M24G	IL59-M24S	3000	M24X3.00	1-1/4	1-1/4	4	5/8	3/4



LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE POLY SWIVEL — 1"to 2" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-4Gx1	IL50-4Sx1	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL50-4Gx15	IL50-4Sx15	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL50-4G	IL50-4S	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL50-5Gx1	IL50-5Sx1	500	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL50-5G	IL50-5S	500	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL50-6G	IL50-6S	1000	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL50-7G	IL50-7S	2000	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL50-8G	IL50-8S	3000	5/8-11	5/8	3/4	1	2-3/4	2	3/16
IL50-9G	IL50-9S	3000	3/4-10	3/4	3/4	1	2-3/4	2	3/16
IL50-10G	IL50-10S	3000	1-8	1	1	1	3	2	1/2
IL50-12G	IL50-12S	3000	1 1/4-7	1 1/4	1	1	3	2	1/2
IL52-4Gx1	IL52-4Sx1	100	1/4-20	1/2	3/4	1 1/2	1-3/4	1	3/16
IL52-4Gx15	IL52-4Sx15	100	1/4-20	1/2	3/4	1 1/2	2-1/4	1-1/2	3/16
IL52-4G	IL52-4S	100	1/4-20	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-5Gx1	IL52-5Sx1	500	5/16-18	1/2	3/4	1 1/2	1-3/4	1	3/16
IL52-5G	IL52-5S	500	5/16-18	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-6G	IL52-6S	1000	3/8-16	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-7G	IL52-7S	2000	1/2-13	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-8G	IL52-8S	3000	5/8-11	5/8	3/4	1 1/2	2-3/4	2	3/16
IL52-9G	IL52-9S	3000	3/4-10	3/4	3/4	1 1/2	2-3/4	2	3/16
IL52-10G	IL52-10S	3000	1-8	1	1	1 1/2	3	2	1/2
IL52-12G	IL52-12S	3000	1 1/4-7	1 1/4	1	1 1/2	3	2	1/2
IL54-4Gx1	IL54-4Sx1	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL54-4Gx15	IL54-4Sx15	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL54-4G	IL54-4S	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL54-5Gx1	IL54-5Sx1	500	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL54-5G	IL54-5S	500	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL54-6G	IL54-6S	1000	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL54-7G	IL54-7S	2000	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL54-8G	IL54-8S	3000	5/8-11	5/8	3/4	2	2-3/4	2	3/16
IL54-9G	IL54-9S	3000	3/4-10	3/4	3/4	2	2-3/4	2	3/16
IL54-10G	IL54-10S	3000	1-8	1	1	2	3	2	1/2
IL54-12G	IL54-12S	3000	1 1/4-7	1 1/4	1	2	3	2	1/2
IL56-4Gx1	IL56-4Sx1	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL56-4Gx15	IL56-4Sx15	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL56-4G	IL56-4S	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL56-5Gx1	IL56-5Sx1	500	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL56-5G	IL56-5S	500	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL56-6G	IL56-6S	1000	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL56-7G	IL56-7S	2000	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL56-8G	IL56-8S	3000	5/8-11	5/8	3/4	3	2-3/4	2	3/16
IL56-9G	IL56-9S	3000	3/4-10	3/4	3/4	3	2-3/4	2	3/16
IL56-10G	IL56-10S	3000	1-8	1	1	3	3	2	1/2
IL56-12G	IL56-12S	3000	1 1/4-7	1 1/4	1	3	3	2	1/2
IL58-4Gx1	IL58-4Sx1	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL58-4Gx15	IL58-4Sx15	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL58-4G	IL58-4S	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL58-5Gx1	IL58-5Sx1	500	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL58-5G	IL58-5S	500	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL58-6G	IL58-6S	1000	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL58-7G	IL58-7S	2000	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL58-8G	IL58-8S	3000	5/8-11	5/8	3/4	4	2-3/4	2	3/16
IL58-9G	IL58-9S	3000	3/4-10	3/4	3/4	4	2-3/4	2	3/16
IL58-10G	IL58-10S	3000	1-8	1	1	4	3	2	1/2
IL58-12G	IL58-12S	3000	1 1/4-7	1 1/4	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

NOTE: See next page for Top Hex (Allen-drive) Thread & Hex Size table at bottom of page.

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

3 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

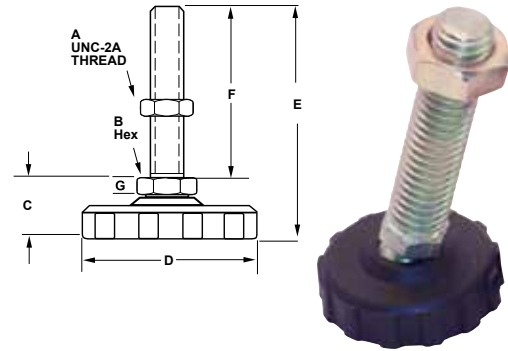**LOW PROFILE POLY SWIVEL — 3" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-4Gx3	IL50-4Sx3	100	1/4-20	1/2	3/4	1	3-3/4	3	3/16
IL50-5Gx3	IL50-5Sx3	500	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL50-6Gx3	IL50-6Sx3	1000	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL50-7Gx3	IL50-7Sx3	2000	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL50-8Gx3	IL50-8Sx3	3000	5/8-11	5/8	3/4	1	3-3/4	3	3/16
IL50-9Gx3	IL50-9Sx3	3000	3/4-10	3/4	3/4	1	3-3/4	3	3/16
IL50-10Gx3	IL50-10Sx3	3000	1-8	1	1	1	4	3	1/2
IL50-12Gx3	IL50-12Sx3	3000	1 1/4-7	1 1/4	1	1	4	3	1/2
IL52-4Gx3	IL52-4Sx3	100	1/4-20	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-5Gx3	IL52-5Sx3	500	5/16-18	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-6Gx3	IL52-6Sx3	1000	3/8-16	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-7Gx3	IL52-7Sx3	2000	1/2-13	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-8Gx3	IL52-8Sx3	3000	5/8-11	5/8	3/4	1 1/2	3-3/4	3	3/16
IL52-9Gx3	IL52-9Sx3	3000	3/4-10	3/4	3/4	1 1/2	3-3/4	3	3/16
IL52-10Gx3	IL52-10Sx3	3000	1-8	1	1	1 1/2	4	3	1/2
IL52-12Gx3	IL52-12Sx3	3000	1 1/4-7	1 1/4	1	1 1/2	4	3	1/2
IL54-4Gx3	IL54-4Sx3	100	1/4-20	1/2	3/4	2	3-3/4	3	3/16
IL54-5Gx3	IL54-5Sx3	500	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL54-6Gx3	IL54-6Sx3	1000	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL54-7Gx3	IL54-7Sx3	2000	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL54-8Gx3	IL54-8Sx3	3000	5/8-11	5/8	3/4	2	3-3/4	3	3/16
IL54-9Gx3	IL54-9Sx3	3000	3/4-10	3/4	3/4	2	3-3/4	3	3/16
IL54-10Gx3	IL54-10Sx3	3000	1-8	1	1	2	4	3	1/2
IL54-12Gx3	IL54-12Sx3	3000	1 1/4-7	1 1/4	1	2	4	3	1/2
IL56-4Gx3	IL56-4Sx3	100	1/4-20	1/2	3/4	3	3-3/4	3	3/16
IL56-5Gx3	IL56-5Sx3	500	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL56-6Gx3	IL56-6Sx3	1000	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL56-7Gx3	IL56-7Sx3	2000	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL56-8Gx3	IL56-8Sx3	3000	5/8-11	5/8	3/4	3	3-3/4	3	3/16
IL56-9Gx3	IL56-9Sx3	3000	3/4-10	3/4	3/4	3	3-3/4	3	3/16
IL56-10Gx3	IL56-10Sx3	3000	1-8	1	1	3	4	3	1/2
IL56-12Gx3	IL56-12Sx3	3000	1 1/4-7	1 1/4	1	3	4	3	1/2
IL58-4Gx3	IL58-4Sx3	100	1/4-20	1/2	3/4	4	3-3/4	3	3/16
IL58-5Gx3	IL58-5Sx3	500	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL58-6Gx3	IL58-6Sx3	1000	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL58-7Gx3	IL58-7Sx3	2000	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL58-8Gx3	IL58-8Sx3	3000	5/8-11	5/8	3/4	4	3-3/4	3	3/16
IL58-9Gx3	IL58-9Sx3	3000	3/4-10	3/4	3/4	4	3-3/4	3	3/16
IL58-10Gx3	IL58-10Sx3	3000	1-8	1	1	4	4	3	1/2
IL58-12Gx3	IL58-12Sx3	3000	1 1/4-7	1 1/4	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

4 NCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 4" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-5Gx4	IL50-5Sx4	500	5/16-18	1/2	3/4	1	4-3/4	4	3/16
IL50-6Gx4	IL50-6Sx4	1000	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL50-7Gx4	IL50-7Sx4	2000	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL50-8Gx4	IL50-8Sx4	3000	5/8-11	5/8	3/4	1	4-3/4	4	3/16
IL50-9Gx4	IL50-9Sx4	3000	3/4-10	3/4	3/4	1	4-3/4	4	3/16
IL50-10Gx4	IL50-10Sx4	3000	1-8	1	1	1	5	4	1/2
IL50-12Gx4	IL50-12Sx4	3000	1 1/4-7	1 1/4	1	1	5	4	1/2
IL52-5Gx4	IL52-5Sx4	500	5/16-18	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-6Gx4	IL52-6Sx4	1000	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-7Gx4	IL52-7Sx4	2000	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-8Gx4	IL52-8Sx4	3000	5/8-11	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-9Gx4	IL52-9Sx4	3000	3/4-10	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-10Gx4	IL52-10Sx4	3000	1-8	1	1	1-1/2	5	4	1/2
IL52-12Gx4	IL52-12Sx4	3000	1 1/4-7	1 1/4	1	1-1/2	5	4	1/2
IL54-5Gx4	IL54-5Sx4	500	5/16-18	1/2	3/4	2	4-3/4	4	3/16
IL54-6Gx4	IL54-6Sx4	1000	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL54-7Gx4	IL54-7Sx4	2000	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL54-8Gx4	IL54-8Sx4	3000	5/8-11	5/8	3/4	2	4-3/4	4	3/16
IL54-9Gx4	IL54-9Sx4	3000	3/4-10	3/4	3/4	2	4-3/4	4	3/16
IL54-10Gx4	IL54-10Sx4	3000	1-8	1	1	2	5	4	1/2
IL54-12Gx4	IL54-12Sx4	3000	1 1/4-7	1 1/4	1	2	5	4	1/2
IL56-5Gx4	IL56-5Sx4	500	5/16-18	1/2	3/4	3	4-3/4	4	3/16
IL56-6Gx4	IL56-6Sx4	1000	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL56-7Gx4	IL56-7Sx4	2000	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL56-8Gx4	IL56-8Sx4	3000	5/8-11	5/8	3/4	3	4-3/4	4	3/16
IL56-9Gx4	IL56-9Sx4	3000	3/4-10	3/4	3/4	3	4-3/4	4	3/16
IL56-10Gx4	IL56-10Sx4	3000	1-8	1	1	3	5	4	1/2
IL56-12Gx4	IL56-12Sx4	3000	1 1/4-7	1 1/4	1	3	5	4	1/2
IL58-5Gx4	IL58-5Sx4	500	5/16-18	1/2	3/4	4	4-3/4	4	3/16
IL58-6Gx4	IL58-6Sx4	1000	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL58-7Gx4	IL58-7Sx4	2000	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL58-8Gx4	IL58-8Sx4	3000	5/8-11	5/8	3/4	4	4-3/4	4	3/16
IL58-9Gx4	IL58-9Sx4	3000	3/4-10	3/4	3/4	4	4-3/4	4	3/16
IL58-10Gx4	IL58-10Sx4	3000	1-8	1	1	4	5	4	1/2
IL58-12Gx4	IL58-12Sx4	3000	1 1/4-7	1 1/4	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

5 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 5" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-6Gx5	IL50-6Sx5	1000	3/8-16	1/2	3/4	1	5-3/4	5	3/16
IL50-7Gx5	IL50-7Sx5	2000	1/2-13	1/2	3/4	1	5-3/4	5	3/16
IL50-8Gx5	IL50-8Sx5	3000	5/8-11	5/8	3/4	1	5-3/4	5	3/16
IL50-9Gx5	IL50-9Sx5	3000	3/4-10	3/4	3/4	1	5-3/4	5	3/16
IL50-10Gx5	IL50-10Sx5	3000	1-8	1	1	1	6	5	1/2
IL50-12Gx5	IL50-12Sx5	3000	1 1/4-7	1-1/4	1	1	6	5	1/2
IL52-6Gx5	IL52-6Sx5	1000	3/8-16	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-7Gx5	IL52-7Sx5	2000	1/2-13	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-8Gx5	IL52-8Sx5	3000	5/8-11	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-9Gx5	IL52-9Sx5	3000	3/4-10	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-10Gx5	IL52-10Sx5	3000	1-8	1	1	1-1/2	6	5	1/2
IL52-12Gx5	IL52-12Sx5	3000	1 1/4-7	1-1/4	1	1-1/2	6	5	1/2
IL54-6Gx5	IL54-6Sx5	1000	3/8-16	1/2	3/4	2	5-3/4	5	3/16
IL54-7Gx5	IL54-7Sx5	2000	1/2-13	1/2	3/4	2	5-3/4	5	3/16
IL54-8Gx5	IL54-8Sx5	3000	5/8-11	5/8	3/4	2	5-3/4	5	3/16
IL54-9Gx5	IL54-9Sx5	3000	3/4-10	3/4	3/4	2	5-3/4	5	3/16
IL54-10Gx5	IL54-10Sx5	3000	1-8	1	1	2	6	5	1/2
IL54-12Gx5	IL54-12Sx5	3000	1 1/4-7	1-1/4	1	2	6	5	1/2
IL56-6Gx5	IL56-6Sx5	1000	3/8-16	1/2	3/4	3	5-3/4	5	3/16
IL56-7Gx5	IL56-7Sx5	2000	1/2-13	1/2	3/4	3	5-3/4	5	3/16
IL56-8Gx5	IL56-8Sx5	3000	5/8-11	5/8	3/4	3	5-3/4	5	3/16
IL56-9Gx5	IL56-9Sx5	3000	3/4-10	3/4	3/4	3	5-3/4	5	3/16
IL56-10Gx5	IL56-10Sx5	3000	1-8	1	1	3	6	5	1/2
IL56-12Gx5	IL56-12Sx5	3000	1 1/4-7	1-1/4	1	3	6	5	1/2
IL58-6Gx5	IL58-6Sx5	1000	3/8-16	1/2	3/4	4	5-3/4	5	3/16
IL58-7Gx5	IL58-7Sx5	2000	1/2-13	1/2	3/4	4	5-3/4	5	3/16
IL58-8Gx5	IL58-8Sx5	3000	5/8-11	5/8	3/4	4	5-3/4	5	3/16
IL58-9Gx5	IL58-9Sx5	3000	3/4-10	3/4	3/4	4	5-3/4	5	3/16
IL58-10Gx5	IL58-10Sx5	3000	1-8	1	1	4	6	5	1/2
IL58-12Gx5	IL58-12Sx5	3000	1 1/4-7	1-1/4	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

6 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

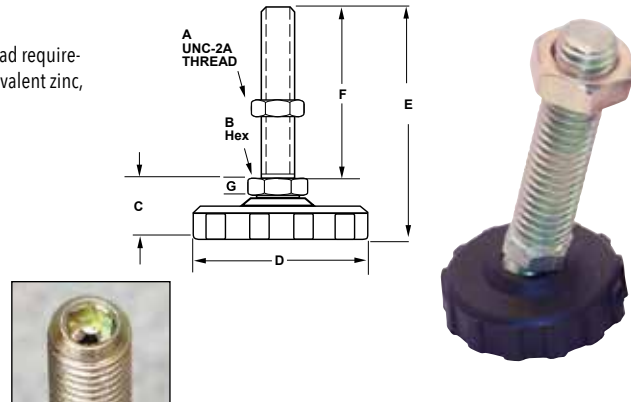**LOW PROFILE POLY SWIVEL — 6" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-6Gx6	IL50-6Sx6	1000	3/8-16	1/2	3/4	1	6-3/4	6	3/16
IL50-7Gx6	IL50-7Sx6	2000	1/2-13	1/2	3/4	1	6-3/4	6	3/16
IL50-8Gx6	IL50-8Sx6	3000	5/8-11	5/8	3/4	1	6-3/4	6	3/16
IL50-9Gx6	IL50-9Sx6	3000	3/4-10	3/4	3/4	1	6-3/4	6	3/16
IL50-10Gx6	IL50-10Sx6	3000	1-8	1	1	1	7	6	1/2
IL50-12Gx6	IL50-12Sx6	3000	1 1/4-7	1-1/4	1	1	7	6	1/2
IL52-6Gx6	IL52-6Sx6	1000	3/8-16	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-7Gx6	IL52-7Sx6	2000	1/2-13	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-8Gx6	IL52-8Sx6	3000	5/8-11	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-9Gx6	IL52-9Sx6	3000	3/4-10	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-10Gx6	IL52-10Sx6	3000	1-8	1	1	1-1/2	7	6	1/2
IL52-12Gx6	IL52-12Sx6	3000	1 1/4-7	1-1/4	1	1-1/2	7	6	1/2
IL54-6Gx6	IL54-6Sx6	1000	3/8-16	1/2	3/4	2	6-3/4	6	3/16
IL54-7Gx6	IL54-7Sx6	2000	1/2-13	1/2	3/4	2	6-3/4	6	3/16
IL54-8Gx6	IL54-8Sx6	3000	5/8-11	5/8	3/4	2	6-3/4	6	3/16
IL54-9Gx6	IL54-9Sx6	3000	3/4-10	3/4	3/4	2	6-3/4	6	3/16
IL54-10Gx6	IL54-10Sx6	3000	1-8	1	1	2	7	6	1/2
IL54-12Gx6	IL54-12Sx6	3000	1 1/4-7	1-1/4	1	2	7	6	1/2
IL56-6Gx6	IL56-6Sx6	1000	3/8-16	1/2	3/4	3	6-3/4	6	3/16
IL56-7Gx6	IL56-7Sx6	2000	1/2-13	1/2	3/4	3	6-3/4	6	3/16
IL56-8Gx6	IL56-8Sx6	3000	5/8-11	5/8	3/4	3	6-3/4	6	3/16
IL56-9Gx6	IL56-9Sx6	3000	3/4-10	3/4	3/4	3	6-3/4	6	3/16
IL56-10Gx6	IL56-10Sx6	3000	1-8	1	1	3	7	6	1/2
IL56-12Gx6	IL56-12Sx6	3000	1 1/4-7	1-1/4	1	3	7	6	1/2
IL58-6Gx6	IL58-6Sx6	1000	3/8-16	1/2	3/4	4	6-3/4	6	3/16
IL58-7Gx6	IL58-7Sx6	2000	1/2-13	1/2	3/4	4	6-3/4	6	3/16
IL58-8Gx6	IL58-8Sx6	3000	5/8-11	5/8	3/4	4	6-3/4	6	3/16
IL58-9Gx6	IL58-9Sx6	3000	3/4-10	3/4	3/4	4	6-3/4	6	3/16
IL58-10Gx6	IL58-10Sx6	3000	1-8	1	1	4	7	6	1/2
IL58-12Gx6	IL58-12Sx6	3000	1 1/4-7	1-1/4	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

8 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 8" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-7Gx8	IL50-7Sx8	2000	1/2-13	1/2	3/4	1	8-3/4	8	3/16
IL50-8Gx8	IL50-8Sx8	3000	5/8-11	5/8	3/4	1	8-3/4	8	3/16
IL50-9Gx8	IL50-9Sx8	3000	3/4-10	3/4	3/4	1	8-3/4	8	3/16
IL50-10Gx8	IL50-10Sx8	3000	1-8	1	1	1	9	8	1/2
IL50-12Gx8	IL50-12Sx8	3000	1 1/4-7	1-1/4	1	1	9	8	1/2
IL52-7Gx8	IL52-7Sx8	2000	1/2-13	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-8Gx8	IL52-8Sx8	3000	5/8-11	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-9Gx8	IL52-9Sx8	3000	3/4-10	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-10Gx8	IL52-10Sx8	3000	1-8	1	1	1-1/2	9	8	1/2
IL52-12Gx8	IL52-12Sx8	3000	1 1/4-7	1-1/4	1	1-1/2	9	8	1/2
IL54-7Gx8	IL54-7Sx8	2000	1/2-13	1/2	3/4	2	8-3/4	8	3/16
IL54-8Gx8	IL54-8Sx8	3000	5/8-11	5/8	3/4	2	8-3/4	8	3/16
IL54-9Gx8	IL54-9Sx8	3000	3/4-10	3/4	3/4	2	8-3/4	8	3/16
IL54-10Gx8	IL54-10Sx8	3000	1-8	1	1	2	9	8	1/2
IL54-12Gx8	IL54-12Sx8	3000	1 1/4-7	1-1/4	1	2	9	8	1/2
IL56-7Gx8	IL56-7Sx8	2000	1/2-13	1/2	3/4	3	8-3/4	8	3/16
IL56-8Gx8	IL56-8Sx8	3000	5/8-11	5/8	3/4	3	8-3/4	8	3/16
IL56-9Gx8	IL56-9Sx8	3000	3/4-10	3/4	3/4	3	8-3/4	8	3/16
IL56-10Gx8	IL56-10Sx8	3000	1-8	1	1	3	9	8	1/2
IL56-12Gx8	IL56-12Sx8	3000	1 1/4-7	1-1/4	1	3	9	8	1/2
IL58-7Gx8	IL58-7Sx8	2000	1/2-13	1/2	3/4	4	8-3/4	8	3/16
IL58-8Gx8	IL58-8Sx8	3000	5/8-11	5/8	3/4	4	8-3/4	8	3/16
IL58-9Gx8	IL58-9Sx8	3000	3/4-10	3/4	3/4	4	8-3/4	8	3/16
IL58-10Gx8	IL58-10Sx8	3000	1-8	1	1	4	9	8	1/2
IL58-12Gx8	IL58-12Sx8	3000	1 1/4-7	1-1/4	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**POLY SWIVEL****METRIC 1&2 INCH STUD****LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS**


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- M6 & M8 available in 1" (25mm) length
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 2 " STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx1	IL50-M6Sx1	100	M6X1	1/2	3/4	1	1-3/4	1	3/16
IL50-M8Gx1	IL50-M8Sx1	500	M8X1.25	1/2	3/4	1	1-3/4	1	3/16
IL50-M6G	IL50-M6S	100	M6X1	1/2	3/4	1	2-3/4	2	3/16
IL50-M8G	IL50-M8S	500	M8X1.25	1/2	3/4	1	2-3/4	2	3/16
IL50-M10G	IL50-M10S	1000	M10X1.50	1/2	3/4	1	2-3/4	2	3/16
IL50-M12G	IL50-M12S	2000	M12X1.75	1/2	3/4	1	2-3/4	2	3/16
IL50-M16G	IL50-M16S	3000	M16X2.00	5/8	3/4	1	2-3/4	2	3/16
IL50-M20G	IL50-M20S	3000	M20X2.50	3/4	3/4	1	2-3/4	2	3/16
IL50-M24G	IL50-M24S	3000	M24X3.00	1	1	1	3	2	1/2
IL52-M6Gx1	IL52-M6Sx1	100	M6X1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M8Gx1	IL52-M8Sx1	500	M8X1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M6G	IL52-M6S	100	M6X1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M8G	IL52-M8S	500	M8X1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M10G	IL52-M10S	1000	M10X1.50	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M12G	IL52-M12S	2000	M12X1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M16G	IL52-M16S	3000	M16X2.00	5/8	3/4	1-1/2	2-3/4	2	3/16
IL52-M20G	IL52-M20S	3000	M20X2.50	3/4	3/4	1-1/2	2-3/4	2	3/16
IL52-M24G	IL52-M24S	3000	M24X3.00	1	1	1-1/2	3	2	1/2
IL54-M6Gx1	IL54-M6Sx1	100	M6X1	1/2	3/4	2	1-3/4	1	3/16
IL54-M8Gx1	IL54-M8Sx1	500	M8X1.25	1/2	3/4	2	1-3/4	1	3/16
IL54-M6G	IL54-M6S	100	M6X1	1/2	3/4	2	2-3/4	2	3/16
IL54-M8G	IL54-M8S	500	M8X1.25	1/2	3/4	2	2-3/4	2	3/16
IL54-M10G	IL54-M10S	1000	M10X1.50	1/2	3/4	2	2-3/4	2	3/16
IL54-M12G	IL54-M12S	2000	M12X1.75	1/2	3/4	2	2-3/4	2	3/16
IL54-M16G	IL54-M16S	3000	M16X2.00	5/8	3/4	2	2-3/4	2	3/16
IL54-M20G	IL54-M20S	3000	M20X2.50	3/4	3/4	2	2-3/4	2	3/16
IL54-M24G	IL54-M24S	3000	M24X3.00	1	1	2	3	2	1/2
IL56-M6Gx1	IL56-M6Sx1	100	M6X1	1/2	3/4	3	1-3/4	1	3/16
IL56-M8Gx1	IL56-M8Sx1	500	M8X1.25	1/2	3/4	3	1-3/4	1	3/16
IL56-M6G	IL56-M6S	100	M6X1	1/2	3/4	3	2-3/4	2	3/16
IL56-M8G	IL56-M8S	500	M8X1.25	1/2	3/4	3	2-3/4	2	3/16
IL56-M10G	IL56-M10S	1000	M10X1.50	1/2	3/4	3	2-3/4	2	3/16
IL56-M12G	IL56-M12S	2000	M12X1.75	1/2	3/4	3	2-3/4	2	3/16
IL56-M16G	IL56-M16S	3000	M16X2.00	5/8	3/4	3	2-3/4	2	3/16
IL56-M20G	IL56-M20S	3000	M20X2.50	3/4	3/4	3	2-3/4	2	3/16
IL56-M24G	IL56-M24S	3000	M24X3.00	1	1	3	3	2	1/2
IL58-M6Gx1	IL58-M6Sx1	100	M6X1	1/2	3/4	4	1-3/4	1	3/16
IL58-M8Gx1	IL58-M8Sx1	500	M8X1.25	1/2	3/4	4	1-3/4	1	3/16
IL58-M6G	IL58-M6S	100	M6X1	1/2	3/4	4	2-3/4	2	3/16
IL58-M8G	IL58-M8S	500	M8X1.25	1/2	3/4	4	2-3/4	2	3/16
IL58-M10G	IL58-M10S	1000	M10X1.50	1/2	3/4	4	2-3/4	2	3/16
IL58-M12G	IL58-M12S	2000	M12X1.75	1/2	3/4	4	2-3/4	2	3/16
IL58-M16G	IL58-M16S	3000	M16X2.00	5/8	3/4	4	2-3/4	2	3/16
IL58-M20G	IL58-M20S	3000	M20X2.50	3/4	3/4	4	2-3/4	2	3/16
IL58-M24G	IL58-M24S	3000	M24X3.00	1	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 3 INCH STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 3" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx3	IL50-M6Sx3	100	M6X1	1/2	3/4	1	3-3/4	3	3/16
IL50-M8Gx3	IL50-M8Sx3	500	M8X1.25	1/2	3/4	1	3-3/4	3	3/16
IL50-M10Gx3	IL50-M10Sx3	1000	M10X1.50	1/2	3/4	1	3-3/4	3	3/16
IL50-M12Gx3	IL50-M12Sx3	2000	M12X1.75	1/2	3/4	1	3-3/4	3	3/16
IL50-M16Gx3	IL50-M16Sx3	3000	M16X2.00	5/8	3/4	1	3-3/4	3	3/16
IL50-M20Gx3	IL50-M20Sx3	3000	M20X2.50	3/4	3/4	1	3-3/4	3	3/16
IL50-M24Gx3	IL50-M24Sx3	3000	M24X3.00	1	1	1	4	3	1/2
IL52-M6Gx3	IL52-M6Sx3	100	M6X1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M8Gx3	IL52-M8Sx3	500	M8X1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M10Gx3	IL52-M10Sx3	1000	M10X1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M12Gx3	IL52-M12Sx3	2000	M12X1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M16Gx3	IL52-M16Sx3	3000	M16X2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL52-M20Gx3	IL52-M20Sx3	3000	M20X2.50	3/4	3/4	1-1/2	3-3/4	3	3/16
IL52-M24Gx3	IL52-M24Sx3	3000	M24X3.00	1	1	1-1/2	4	3	1/2
IL54-M6Gx3	IL54-M6Sx3	100	M6X1	1/2	3/4	2	3-3/4	3	3/16
IL54-M8Gx3	IL54-M8Sx3	500	M8X1.25	1/2	3/4	2	3-3/4	3	3/16
IL54-M10Gx3	IL54-M10Sx3	1000	M10X1.50	1/2	3/4	2	3-3/4	3	3/16
IL54-M12Gx3	IL54-M12Sx3	2000	M12X1.75	1/2	3/4	2	3-3/4	3	3/16
IL54-M16Gx3	IL54-M16Sx3	3000	M16X2.00	5/8	3/4	2	3-3/4	3	3/16
IL54-M20Gx3	IL54-M20Sx3	3000	M20X2.50	3/4	3/4	2	3-3/4	3	3/16
IL54-M24Gx3	IL54-M24Sx3	3000	M24X3.00	1	1	2	4	3	1/2
IL56-M6Gx3	IL56-M6Sx3	100	M6X1	1/2	3/4	3	3-3/4	3	3/16
IL56-M8Gx3	IL56-M8Sx3	500	M8X1.25	1/2	3/4	3	3-3/4	3	3/16
IL56-M10Gx3	IL56-M10Sx3	1000	M10X1.50	1/2	3/4	3	3-3/4	3	3/16
IL56-M12Gx3	IL56-M12Sx3	2000	M12X1.75	1/2	3/4	3	3-3/4	3	3/16
IL56-M16Gx3	IL56-M16Sx3	3000	M16X2.00	5/8	3/4	3	3-3/4	3	3/16
IL56-M20Gx3	IL56-M20Sx3	3000	M20X2.50	3/4	3/4	3	3-3/4	3	3/16
IL56-M24Gx3	IL56-M24Sx3	3000	M24X3.00	1	1	3	4	3	1/2
IL58-M6Gx3	IL58-M6Sx3	100	M6X1	1/2	3/4	4	3-3/4	3	3/16
IL58-M8Gx3	IL58-M8Sx3	500	M8X1.25	1/2	3/4	4	3-3/4	3	3/16
IL58-M10Gx3	IL58-M10Sx3	1000	M10X1.50	1/2	3/4	4	3-3/4	3	3/16
IL58-M12Gx3	IL58-M12Sx3	2000	M12X1.75	1/2	3/4	4	3-3/4	3	3/16
IL58-M16Gx3	IL58-M16Sx3	3000	M16X2.00	5/8	3/4	4	3-3/4	3	3/16
IL58-M20Gx3	IL58-M20Sx3	3000	M20X2.50	3/4	3/4	4	3-3/4	3	3/16
IL58-M24Gx3	IL58-M24Sx3	3000	M24X3.00	1	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 4 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 4" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M8Gx4	IL50-M8Sx4	500	M8X1.25	1/2	3/4	1	4-3/4	4	3/16
IL50-M10Gx4	IL50-M10Sx4	1000	M10X1.50	1/2	3/4	1	4-3/4	4	3/16
IL50-M12Gx4	IL50-M12Sx4	2000	M12X1.75	1/2	3/4	1	4-3/4	4	3/16
IL50-M16Gx4	IL50-M16Sx4	3000	M16X2.00	5/8	3/4	1	4-3/4	4	3/16
IL50-M20Gx4	IL50-M20Sx4	3000	M20X2.50	3/4	3/4	1	4-3/4	4	3/16
IL50-M24Gx4	IL50-M24Sx4	3000	M24X3.00	1	1	1	5	4	1/2
IL52-M8Gx4	IL52-M8Sx4	500	M8X1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M10Gx4	IL52-M10Sx4	1000	M10X1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M12Gx4	IL52-M12Sx4	2000	M12X1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M16Gx4	IL52-M16Sx4	3000	M16X2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-M20Gx4	IL52-M20Sx4	3000	M20X2.50	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-M24Gx4	IL52-M24Sx4	3000	M24X3.00	1	1	1-1/2	5	4	1/2
IL54-M8Gx4	IL54-M8Sx4	500	M8X1.25	1/2	3/4	2	4-3/4	4	3/16
IL54-M10Gx4	IL54-M10Sx4	1000	M10X1.50	1/2	3/4	2	4-3/4	4	3/16
IL54-M12Gx4	IL54-M12Sx4	2000	M12X1.75	1/2	3/4	2	4-3/4	4	3/16
IL54-M16Gx4	IL54-M16Sx4	3000	M16X2.00	5/8	3/4	2	4-3/4	4	3/16
IL54-M20Gx4	IL54-M20Sx4	3000	M20X2.50	3/4	3/4	2	4-3/4	4	3/16
IL54-M24Gx4	IL54-M24Sx4	3000	M24X3.00	1	1	2	5	4	1/2
IL56-M8Gx4	IL56-M8Sx4	500	M8X1.25	1/2	3/4	3	4-3/4	4	3/16
IL56-M10Gx4	IL56-M10Sx4	1000	M10X1.50	1/2	3/4	3	4-3/4	4	3/16
IL56-M12Gx4	IL56-M12Sx4	2000	M12X1.75	1/2	3/4	3	4-3/4	4	3/16
IL56-M16Gx4	IL56-M16Sx4	3000	M16X2.00	5/8	3/4	3	4-3/4	4	3/16
IL56-M20Gx4	IL56-M20Sx4	3000	M20X2.50	3/4	3/4	3	4-3/4	4	3/16
IL56-M24Gx4	IL56-M24Sx4	3000	M24X3.00	1	1	3	5	4	1/2
IL58-M8Gx4	IL58-M8Sx4	500	M8X1.25	1/2	3/4	4	4-3/4	4	3/16
IL58-M10Gx4	IL58-M10Sx4	1000	M10X1.50	1/2	3/4	4	4-3/4	4	3/16
IL58-M12Gx4	IL58-M12Sx4	2000	M12X1.75	1/2	3/4	4	4-3/4	4	3/16
IL58-M16Gx4	IL58-M16Sx4	3000	M16X2.00	5/8	3/4	4	4-3/4	4	3/16
IL58-M20Gx4	IL58-M20Sx4	3000	M20X2.50	3/4	3/4	4	4-3/4	4	3/16
IL58-M24Gx4	IL58-M24Sx4	3000	M24X3.00	1	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 5 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

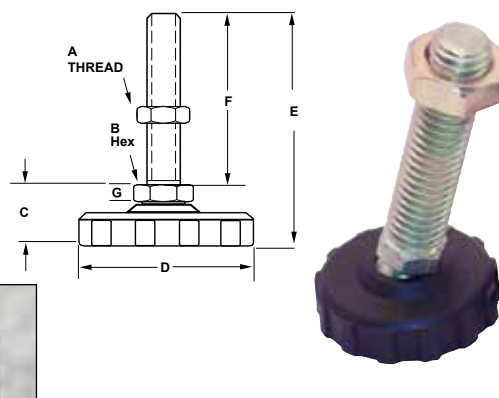**LOW PROFILE METRIC POLY SWIVEL — 5" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx5	IL50-M10Sx5	1000	M10X1.50	1/2	3/4	1	5-3/4	5	3/16
IL50-M12Gx5	IL50-M12Sx5	2000	M12X1.75	1/2	3/4	1	5-3/4	5	3/16
IL50-M16Gx5	IL50-M16Sx5	3000	M16X2.00	5/8	3/4	1	5-3/4	5	3/16
IL50-M20Gx5	IL50-M20Sx5	3000	M20X2.50	3/4	3/4	1	5-3/4	5	3/16
IL50-M24Gx5	IL50-M24Sx5	3000	M24X3.00	1	1	1	6	5	1/2
IL52-M10Gx5	IL52-M10Sx5	1000	M10X1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M12Gx5	IL52-M12Sx5	2000	M12X1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M16Gx5	IL52-M16Sx5	3000	M16X2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-M20Gx5	IL52-M20Sx5	3000	M20X2.50	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-M24Gx5	IL52-M24Sx5	3000	M24X3.00	1	1	1-1/2	6	5	1/2
IL54-M10Gx5	IL54-M10Sx5	1000	M10X1.50	1/2	3/4	2	5-3/4	5	3/16
IL54-M12Gx5	IL54-M12Sx5	2000	M12X1.75	1/2	3/4	2	5-3/4	5	3/16
IL54-M16Gx5	IL54-M16Sx5	3000	M16X2.00	5/8	3/4	2	5-3/4	5	3/16
IL54-M20Gx5	IL54-M20Sx5	3000	M20X2.50	3/4	3/4	2	5-3/4	5	3/16
IL54-M24Gx5	IL54-M24Sx5	3000	M24X3.00	1	1	2	6	5	1/2
IL56-M10Gx5	IL56-M10Sx5	1000	M10X1.50	1/2	3/4	3	5-3/4	5	3/16
IL56-M12Gx5	IL56-M12Sx5	2000	M12X1.75	1/2	3/4	3	5-3/4	5	3/16
IL56-M16Gx5	IL56-M16Sx5	3000	M16X2.00	5/8	3/4	3	5-3/4	5	3/16
IL56-M20Gx5	IL56-M20Sx5	3000	M20X2.50	3/4	3/4	3	5-3/4	5	3/16
IL56-M24Gx5	IL56-M24Sx5	3000	M24X3.00	1	1	3	6	5	1/2
IL58-M10Gx5	IL58-M10Sx5	1000	M10X1.50	1/2	3/4	4	5-3/4	5	3/16
IL58-M12Gx5	IL58-M12Sx5	2000	M12X1.75	1/2	3/4	4	5-3/4	5	3/16
IL58-M16Gx5	IL58-M16Sx5	3000	M16X2.00	5/8	3/4	4	5-3/4	5	3/16
IL58-M20Gx5	IL58-M20Sx5	3000	M20X2.50	3/4	3/4	4	5-3/4	5	3/16
IL58-M24Gx5	IL58-M24Sx5	3000	M24X3.00	1	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 6 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 6" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx6	IL50-M10Sx6	1000	M10X1.50	1/2	3/4	1	6-3/4	6	3/16
IL50-M12Gx6	IL50-M12Sx6	2000	M12X1.75	1/2	3/4	1	6-3/4	6	3/16
IL50-M16Gx6	IL50-M16Sx6	3000	M16X2.00	5/8	3/4	1	6-3/4	6	3/16
IL50-M20Gx6	IL50-M20Sx6	3000	M20X2.50	3/4	3/4	1	6-3/4	6	3/16
IL50-M24Gx6	IL50-M24Sx6	3000	M24X3.00	1	1	1	7	6	1/2
IL52-M10Gx6	IL52-M10Sx6	1000	M10X1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M12Gx6	IL52-M12Sx6	2000	M12X1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M16Gx6	IL52-M16Sx6	3000	M16X2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-M20Gx6	IL52-M20Sx6	3000	M20X2.50	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-M24Gx6	IL52-M24Sx6	3000	M24X3.00	1	1	1-1/2	7	6	1/2
IL54-M10Gx6	IL54-M10Sx6	1000	M10X1.50	1/2	3/4	2	6-3/4	6	3/16
IL54-M12Gx6	IL54-M12Sx6	2000	M12X1.75	1/2	3/4	2	6-3/4	6	3/16
IL54-M16Gx6	IL54-M16Sx6	3000	M16X2.00	5/8	3/4	2	6-3/4	6	3/16
IL54-M20Gx6	IL54-M20Sx6	3000	M20X2.50	3/4	3/4	2	6-3/4	6	3/16
IL54-M24Gx6	IL54-M24Sx6	3000	M24X3.00	1	1	2	7	6	1/2
IL56-M10Gx6	IL56-M10Sx6	1000	M10X1.50	1/2	3/4	3	6-3/4	6	3/16
IL56-M12Gx6	IL56-M12Sx6	2000	M12X1.75	1/2	3/4	3	6-3/4	6	3/16
IL56-M16Gx6	IL56-M16Sx6	3000	M16X2.00	5/8	3/4	3	6-3/4	6	3/16
IL56-M20Gx6	IL56-M20Sx6	3000	M20X2.50	3/4	3/4	3	6-3/4	6	3/16
IL56-M24Gx6	IL56-M24Sx6	3000	M24X3.00	1	1	3	7	6	1/2
IL58-M10Gx6	IL58-M10Sx6	1000	M10X1.50	1/2	3/4	4	6-3/4	6	3/16
IL58-M12Gx6	IL58-M12Sx6	2000	M12X1.75	1/2	3/4	4	6-3/4	6	3/16
IL58-M16Gx6	IL58-M16Sx6	3000	M16X2.00	5/8	3/4	4	6-3/4	6	3/16
IL58-M20Gx6	IL58-M20Sx6	3000	M20X2.50	3/4	3/4	4	6-3/4	6	3/16
IL58-M24Gx6	IL58-M24Sx6	3000	M24X3.00	1	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 8 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**


The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 8" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M12Gx8	IL50-M12Sx8	2000	M12X1.75	1/2	3/4	1	8-3/4	8	3/16
IL50-M16Gx8	IL50-M16Sx8	3000	M16X2.00	5/8	3/4	1	8-3/4	8	3/16
IL50-M20Gx8	IL50-M20Sx8	3000	M20X2.50	3/4	3/4	1	8-3/4	8	3/16
IL50-M24Gx8	IL50-M24Sx8	3000	M24X3.00	1	1	1	9	8	1/2
IL52-M12Gx8	IL52-M12Sx8	2000	M12X1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-M16Gx8	IL52-M16Sx8	3000	M16X2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-M20Gx8	IL52-M20Sx8	3000	M20X2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-M24Gx8	IL52-M24Sx8	3000	M24X3.00	1	1	1-1/2	9	8	1/2
IL54-M12Gx8	IL54-M12Sx8	2000	M12X1.75	1/2	3/4	2	8-3/4	8	3/16
IL54-M16Gx8	IL54-M16Sx8	3000	M16X2.00	5/8	3/4	2	8-3/4	8	3/16
IL54-M20Gx8	IL54-M20Sx8	3000	M20X2.50	3/4	3/4	2	8-3/4	8	3/16
IL54-M24Gx8	IL54-M24Sx8	3000	M24X3.00	1	1	2	9	8	1/2
IL56-M12Gx8	IL56-M12Sx8	2000	M12X1.75	1/2	3/4	3	8-3/4	8	3/16
IL56-M16Gx8	IL56-M16Sx8	3000	M16X2.00	5/8	3/4	3	8-3/4	8	3/16
IL56-M20Gx8	IL56-M20Sx8	3000	M20X2.50	3/4	3/4	3	8-3/4	8	3/16
IL56-M24Gx8	IL56-M24Sx8	3000	M24X3.00	1	1	3	9	8	1/2
IL58-M12Gx8	IL58-M12Sx8	2000	M12X1.75	1/2	3/4	4	8-3/4	8	3/16
IL58-M16Gx8	IL58-M16Sx8	3000	M16X2.00	5/8	3/4	4	8-3/4	8	3/16
IL58-M20Gx8	IL58-M20Sx8	3000	M20X2.50	3/4	3/4	4	8-3/4	8	3/16
IL58-M24Gx8	IL58-M24Sx8	3000	M24X3.00	1	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY FIXED STUD

POLY BASE FIXED STUD GLIDES


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide* is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

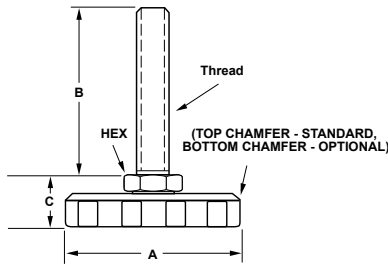

Optional bottom chamfer (reverse assembly) – with 90° top edge

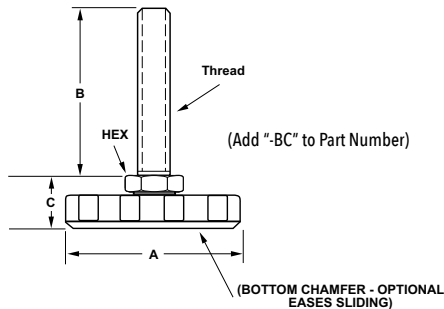

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-4Bx1/2	IL7-4BSx1/2	100	1/4-20	1/2	1	1/2	11/16
IL7-4Bx1	IL7-4BSx1	100	1/4-20	1/2	1	1	11/16
IL7-4B	IL7-4BS	100	1/4-20	1/2	1	1-9/16	11/16
IL7-4Bx2-HX	IL7-4BSx2-HX	100	1/4-20	1/2	1	2	11/16
IL7-4Bx2.5	IL7-4BSx2.5	100	1/4-20	1/2	1	2-1/2	11/16
IL7-5Bx3/4	IL7-5BSx3/4	500	5/16-18	1/2	1	3/4	11/16
IL7-5Bx1.5-HX	IL7-5BSx1.5-HX	500	5/16-18	1/2	1	1-1/2	11/16
IL7-5B	IL7-5BS	500	5/16-18	1/2	1	1-9/16	11/16
IL7-5Bx2.5-HX	IL7-5BSx2.5-HX	500	5/16-18	1/2	1	2-1/2	11/16
IL7-5Bx3	IL7-5BSx3	500	5/16-18	1/2	1	3	11/16
IL7-5Bx4	IL7-5BSx4	500	5/16-18	1/2	1	4	11/16
IL7-6Bx3/4	IL7-6BSx3/4	1000	3/8-16	1/2	1	3/4	11/16
IL7-6Bx1.5-HX	IL7-6BSx1.5-HX	1000	3/8-16	1/2	1	1-1/2	11/16
IL7-6B	IL7-6BS	1000	3/8-16	1/2	1	1-9/16	11/16
IL7-6Bx1	IL7-6BSx1	1000	3/8-16	1/2	1	1	11/16
IL7-6Bx2	IL7-6BSx2	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx2-HX	IL7-6BSx2-HX	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx3	IL7-6BSx3	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx3-HX	IL7-6BSx3-HX	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx4	IL7-6BSx4	1000	3/8-16	1/2	1	4	11/16
IL7-6Bx4.5-HX	IL7-6BSx4.5-HX	1000	3/8-16	1/2	1	4-1/2	11/16
IL7-6Bx6-HX	IL7-6BSx6-HX	1000	3/8-16	1/2	1	6	11/16
IL7-6FBx1	IL7-6FBSx1	1000	3/8-24	1/2	1	1	11/16
IL7-6FBx2	IL7-6FBSx2	1000	3/8-24	1/2	1	2	11/16
IL7-7B	IL7-7BS	2000	1/2-13	1/2	1	1-9/16	11/16
IL7-7Bx2	IL7-7BSx2	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2-HX	IL7-7BSx2-HX	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2.5-HX	IL7-7BSx2.5-HX	2000	1/2-13	1/2	1	2-1/2	11/16
IL7-7Bx3	IL7-7BSx3	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3-HX	IL7-7BSx3-HX	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3.5-HX	IL7-7BSx3.5-HX	2000	1/2-13	1/2	1	3-1/2	11/16
IL7-7Bx4	IL7-7BSx4	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx4-HX	IL7-7BSx4-HX	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx5	IL7-7BSx5	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx5-HX	IL7-7BSx5-HX	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx6-HX	IL7-7BSx6-HX	1500	1/2-13	1/2	1	6	11/16
IL7-7Bx8-HX	IL7-7BSx8-HX	1000	1/2-13	1/2	1	8	11/16
IL7-7FBx1	IL7-7FBSx1	2000	1/2-20	1/2	1	1	11/16
IL7-7FBx2	IL7-7FBSx2	2000	1/2-20	1/2	1	2	11/16
IL7-7FBx4	IL7-7FBSx4	2000	1/2-20	1/2	1	4	11/16
IL7-8B	IL7-8BS	2500	5/8-11	5/8	1	1-9/16	11/16
IL7-8Bx3	IL7-8BSx3	2500	5/8-11	5/8	1	3	11/16
IL7-8Bx4	IL7-8BSx4	2500	5/8-11	5/8	1	4	11/16
IL7-8Bx5	IL7-8BSx5	2500	5/8-11	5/8	1	5	11/16
IL7-9B	IL7-9BS	3000	3/4-10	3/4	1	1-9/16	11/16
IL7-9Bx3	IL7-9BSx3	3000	3/4-10	3/4	1	3	11/16
IL7-9Bx4	IL7-9BSx4	3000	3/4-10	3/4	1	4	11/16
IL8-4Bx1/2	IL8-4BSx1/2	100	1/4-20	1/2	1-1/2	1/2	11/16
IL8-4Bx1	IL8-4BSx1	100	1/4-20	1/2	1-1/2	1	11/16
IL8-4B	IL8-4BS	100	1/4-20	1/2	1-1/2	1-9/16	11/16
IL8-4Bx2-HX	IL8-4BSx2-HX	100	1/4-20	1/2	1-1/2	2	11/16
IL8-4Bx2.5	IL8-4BSx2.5	100	1/4-20	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3/4	IL8-5BSx3/4	500	5/16-18	1/2	1-1/2	3/4	11/16
IL8-5Bx1.5-HX	IL8-5BSx1.5-HX	500	5/16-18	1/2	1-1/2	1-1/2	11/16
IL8-5B	IL8-5BS	500	5/16-18	1/2	1-1/2	1-9/16	11/16
IL8-5Bx2.5-HX	IL8-5BSx2.5-HX	500	5/16-18	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3	IL8-5BSx3	500	5/16-18	1/2	1-1/2	3	11/16
IL8-5Bx4	IL8-5BSx4	500	5/16-18	1/2	1-1/2	4	11/16
IL8-6Bx3/4	IL8-6BSx3/4	1000	3/8-16	1/2	1-1/2	3/4	11/16
IL8-6Bx1.5-HX	IL8-6BSx1.5-HX	1000	3/8-16	1/2	1-1/2	1-1/2	11/16
IL8-6B	IL8-6BS	1000	3/8-16	1/2	1-1/2	1-9/16	11/16
IL8-6Bx1	IL8-6BSx1	1000	3/8-16	1/2	1-1/2	1	11/16
IL8-6Bx2	IL8-6BSx2	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx2-HX	IL8-6BSx2-HX	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx3	IL8-6BSx3	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx3-HX	IL8-6BSx3-HX	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx4	IL8-6BSx4	1000	3/8-16	1/2	1-1/2	4	11/16
IL8-6Bx4.5-HX	IL8-6BSx4.5-HX	1000	3/8-16	1/2	1-1/2	4-1/2	11/16
IL8-6Bx6-HX	IL8-6BSx6-HX	1000	3/8-16	1/2	1-1/2	6	11/16
IL8-6FBx1	IL8-6FBSx1	1000	3/8-24	1/2	1-1/2	1	11/16
IL8-6FBx2	IL8-6FBSx2	1000	3/8-24	1/2	1-1/2	2	11/16
IL8-7B	IL8-7BS	2000	1/2-13	1/2	1-1/2	1-9/16	11/16
IL8-7Bx2	IL8-7BSx2	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2-HX	IL8-7BSx2-HX	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2.5-HX	IL8-7BSx2.5-HX	2000	1/2-13	1/2	1-1/2	2-1/2	11/16
IL8-7Bx3	IL8-7BSx3	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3-HX	IL8-7BSx3-HX	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3.5-HX	IL8-7BSx3.5-HX	2000	1/2-13	1/2	1-1/2	3-1/2	11/16
IL8-7Bx4	IL8-7BSx4	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx4-HX	IL8-7BSx4-HX	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx5	IL8-7BSx5	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx5-HX	IL8-7BSx5-HX	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx6-HX	IL8-7BSx6-HX	1500	1/2-13	1/2	1-1/2	6	11/16
IL8-7Bx8-HX	IL8-7BSx8-HX	1000	1/2-13	1/2	1-1/2	8	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

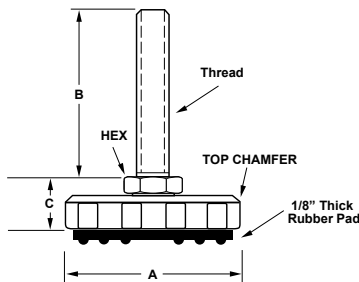

Rubber Pad Bottom View

MEDIUM-DUTY LEVELERS

POLY BASE FIXED STUD WITH RUBBER PAD

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-4Bx1/2-P	IL7-4BSx1/2-P	100	1/4-20	1/2	1	1/2	11/16
IL7-4Bx1-P	IL7-4BSx1-P	100	1/4-20	1/2	1	1	11/16
IL7-4B-P	IL7-4BS-P	100	1/4-20	1/2	1	1-9/16	11/16
IL7-4Bx2-HX-P	IL7-4BSx2-HX-P	100	1/4-20	1/2	1	2	11/16
IL7-4Bx25-P	IL7-4BSx25-P	100	1/4-20	1/2	1	2-1/2	11/16
IL7-5Bx3/4-P	IL7-5BSx3/4-P	500	5/16-18	1/2	1	3/4	11/16
IL7-5Bx15-HX-P	IL7-5BSx15-HX-P	500	5/16-18	1/2	1	1-1/2	11/16
IL7-5B-P	IL7-5BS-P	500	5/16-18	1/2	1	1-9/16	11/16
IL7-5Bx25-HX-P	IL7-5BSx25-HX-P	500	5/16-18	1/2	1	2-1/2	11/16
IL7-5Bx3-P	IL7-5BSx3-P	500	5/16-18	1/2	1	3	11/16
IL7-5Bx4-P	IL7-5BSx4-P	500	5/16-18	1/2	1	4	11/16
IL7-6Bx3/4-P	IL7-6BSx3/4-P	1000	3/8-16	1/2	1	3/4	11/16
IL7-6Bx15-HX-P	IL7-6BSx15-HX-P	1000	3/8-16	1/2	1	1-1/2	11/16
IL7-6B-P	IL7-6BS-P	1000	3/8-16	1/2	1	1-9/16	11/16
IL7-6Bx1-P	IL7-6BSx1-P	1000	3/8-16	1/2	1	1	11/16
IL7-6Bx2-P	IL7-6BSx2-P	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx2-HX-P	IL7-6BSx2-HX-P	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx3-P	IL7-6BSx3-P	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx3-HX-P	IL7-6BSx3-HX-P	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx4-P	IL7-6BSx4-P	1000	3/8-16	1/2	1	4	11/16
IL7-6Bx45-HX-P	IL7-6BSx45-HX-P	1000	3/8-16	1/2	1	4-1/2	11/16
IL7-6Bx6-HX-P	IL7-6BSx6-HX-P	1000	3/8-16	1/2	1	6	11/16
IL7-6FBx1-P	IL7-6FBSx1-P	1000	3/8-24	1/2	1	1	11/16
IL7-6FBx2-P	IL7-6FBSx2-P	1000	3/8-24	1/2	1	2	11/16
IL7-7B-P	IL7-7BS-P	2000	1/2-13	1/2	1	1-9/16	11/16
IL7-7Bx2-P	IL7-7BSx2-P	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2-HX-P	IL7-7BSx2-HX-P	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx25-HX-P	IL7-7BSx25-HX-P	2000	1/2-13	1/2	1	2-1/2	11/16
IL7-7Bx3-P	IL7-7BSx3-P	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3-HX-P	IL7-7BSx3-HX-P	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx35-HX-P	IL7-7BSx35-HX-P	2000	1/2-13	1/2	1	3-1/2	11/16
IL7-7Bx4-P	IL7-7BSx4-P	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx4-HX-P	IL7-7BSx4-HX-P	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx5-P	IL7-7BSx5-P	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx5-HX-P	IL7-7BSx5-HX-P	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx6-HX-P	IL7-7BSx6-HX-P	1500	1/2-13	1/2	1	6	11/16
IL7-7Bx8-HX-P	IL7-7BSx8-HX-P	1000	1/2-13	1/2	1	8	11/16
IL7-7FBx1-P	IL7-7FBSx1-P	2000	1/2-20	1/2	1	1	11/16
IL7-7FBx2-P	IL7-7FBSx2-P	2000	1/2-20	1/2	1	2	11/16
IL7-7FBx4-P	IL7-7FBSx4-P	2000	1/2-20	1/2	1	4	11/16
IL7-8B-P	IL7-8BS-P	2500	5/8-11	5/8	1	1-9/16	11/16
IL7-8Bx3-P	IL7-8BSx3-P	2500	5/8-11	5/8	1	3	11/16
IL7-8Bx4-P	IL7-8BSx4-P	2500	5/8-11	5/8	1	4	11/16
IL7-8Bx5-P	IL7-8BSx5-P	2500	5/8-11	5/8	1	5	11/16
IL7-9B-P	IL7-9BS-P	3000	3/4-10	3/4	1	1-9/16	11/16
IL7-9Bx3-P	IL7-9BSx3-P	3000	3/4-10	3/4	1	3	11/16
IL7-9Bx4-P	IL7-9BSx4-P	3000	3/4-10	3/4	1	4	11/16
IL8-4Bx1/2-P	IL8-4BSx1/2-P	100	1/4-20	1/2	1-1/2	1/2	11/16
IL8-4Bx1-P	IL8-4BSx1-P	100	1/4-20	1/2	1-1/2	1	11/16
IL8-4B-P	IL8-4BS-P	100	1/4-20	1/2	1-1/2	1-9/16	11/16
IL8-4Bx2-HX-P	IL8-4BSx2-HX-P	100	1/4-20	1/2	1-1/2	2	11/16
IL8-4Bx25-P	IL8-4BSx25-P	100	1/4-20	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3/4-P	IL8-5BSx3/4-P	500	5/16-18	1/2	1-1/2	3/4	11/16
IL8-5Bx15-HX-P	IL8-5BSx15-HX-P	500	5/16-18	1/2	1-1/2	1-1/2	11/16
IL8-5B-P	IL8-5BS-P	500	5/16-18	1/2	1-1/2	1-9/16	11/16
IL8-5Bx25-HX-P	IL8-5BSx25-HX-P	500	5/16-18	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3-P	IL8-5BSx3-P	500	5/16-18	1/2	1-1/2	3	11/16
IL8-5Bx4-P	IL8-5BSx4-P	500	5/16-18	1/2	1-1/2	4	11/16
IL8-6Bx3/4-P	IL8-6BSx3/4-P	1000	3/8-16	1/2	1-1/2	3/4	11/16
IL8-6Bx15-HX-P	IL8-6BSx15-HX-P	1000	3/8-16	1/2	1-1/2	1-1/2	11/16
IL8-6B-P	IL8-6BS-P	1000	3/8-16	1/2	1-1/2	1-9/16	11/16
IL8-6Bx1-P	IL8-6BSx1-P	1000	3/8-16	1/2	1-1/2	1	11/16
IL8-6Bx2-P	IL8-6BSx2-P	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx2-HX-P	IL8-6BSx2-HX-P	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx3-P	IL8-6BSx3-P	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx3-HX-P	IL8-6BSx3-HX-P	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx4-P	IL8-6BSx4-P	1000	3/8-16	1/2	1-1/2	4	11/16
IL8-6Bx45-HX-P	IL8-6BSx45-HX-P	1000	3/8-16	1/2	1-1/2	4-1/2	11/16
IL8-6Bx6-HX-P	IL8-6BSx6-HX-P	1000	3/8-16	1/2	1-1/2	6	11/16
IL8-6FBx1-P	IL8-6FBSx1-P	1000	3/8-24	1/2	1-1/2	1	11/16
IL8-6FBx2-P	IL8-6FBSx2-P	1000	3/8-24	1/2	1-1/2	2	11/16
IL8-7B-P	IL8-7BS-P	2000	1/2-13	1/2	1-1/2	1-9/16	11/16
IL8-7Bx2-P	IL8-7BSx2-P	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2-HX-P	IL8-7BSx2-HX-P	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx25-HX-P	IL8-7BSx25-HX-P	2000	1/2-13	1/2	1-1/2	2-1/2	11/16
IL8-7Bx3-P	IL8-7BSx3-P	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3-HX-P	IL8-7BSx3-HX-P	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx35-HX-P	IL8-7BSx35-HX-P	2000	1/2-13	1/2	1-1/2	3-1/2	11/16
IL8-7Bx4-P	IL8-7BSx4-P	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx4-HX-P	IL8-7BSx4-HX-P	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx5-P	IL8-7BSx5-P	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx5-HX-P	IL8-7BSx5-HX-P	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx6-HX-P	IL8-7BSx6-HX-P	1500	1/2-13	1/2	1-1/2	6	11/16
IL8-7Bx8-HX-P	IL8-7BSx8-HX-P	1000	1/2-13	1/2	1-1/2	8	11/16



POLY BASE FIXED STUD GLIDES


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide* is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

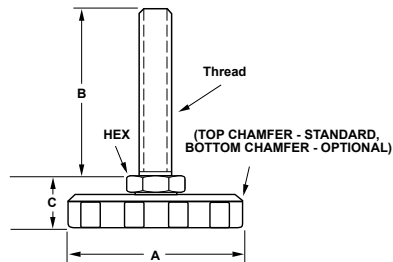

Optional bottom chamfer (reverse assembly) – with 90° top edge

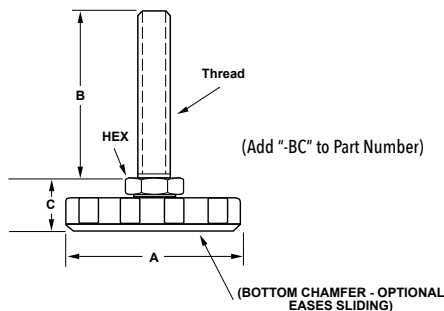

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL8-7FBx1	IL8-7FBSx1	2000	1/2-20	1/2	1-1/2	1	11/16
IL8-7FBx2	IL8-7FBSx2	2000	1/2-20	1/2	1-1/2	2	11/16
IL8-7FBx4	IL8-7FBSx4	2000	1/2-20	1/2	1-1/2	4	11/16
IL8-8B	IL8-8BS	2500	5/8-11	5/8	1-1/2	1-9/16	11/16
IL8-8Bx3	IL8-8BSx3	2500	5/8-11	5/8	1-1/2	3	11/16
IL8-8Bx4	IL8-8BSx4	2500	5/8-11	5/8	1-1/2	4	11/16
IL8-8Bx5	IL8-8BSx5	2500	5/8-11	5/8	1-1/2	5	11/16
IL8-9B	IL8-9BS	3000	3/4-10	3/4	1-1/2	1-9/16	11/16
IL8-9Bx3	IL8-9BSx3	3000	3/4-10	3/4	1-1/2	3	11/16
IL8-9Bx4	IL8-9BSx4	3000	3/4-10	3/4	1-1/2	4	11/16
IL7A-4Bx1/2	IL7A-4BSx1/2	100	1/4-20	1/2	2	1/2	11/16
IL7A-4Bx1	IL7A-4BSx1	100	1/4-20	1/2	2	1	11/16
IL7A-4B	IL7A-4BS	100	1/4-20	1/2	2	1-9/16	11/16
IL7A-4Bx2-HX	IL7A-4BSx2-HX	100	1/4-20	1/2	2	2	11/16
IL7A-4Bx25	IL7A-4BSx25	100	1/4-20	1/2	2	2-1/2	11/16
IL7A-5Bx3/4	IL7A-5BSx3/4	500	5/16-18	1/2	2	3/4	11/16
IL7A-5Bx15-HX	IL7A-5BSx15-HX	500	5/16-18	1/2	2	1-1/2	11/16
IL7A-5B	IL7A-5BS	500	5/16-18	1/2	2	1-9/16	11/16
IL7A-5Bx25-HX	IL7A-5BSx25-HX	500	5/16-18	1/2	2	2-1/2	11/16
IL7A-5Bx3	IL7A-5BSx3	500	5/16-18	1/2	2	3	11/16
IL7A-5Bx4	IL7A-5BSx4	500	5/16-18	1/2	2	4	11/16
IL7A-6Bx3/4	IL7A-6BSx3/4	1000	3/8-16	1/2	2	3/4	11/16
IL7A-6Bx15-HX	IL7A-6BSx15-HX	1000	3/8-16	1/2	2	1-1/2	11/16
IL7A-6B	IL7A-6BS	1000	3/8-16	1/2	2	1-9/16	11/16
IL7A-6Bx1	IL7A-6BSx1	1000	3/8-16	1/2	2	1	11/16
IL7A-6Bx2	IL7A-6BSx2	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx2-HX	IL7A-6BSx2-HX	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx3	IL7A-6BSx3	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx3-HX	IL7A-6BSx3-HX	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx4	IL7A-6BSx4	1000	3/8-16	1/2	2	4	11/16
IL7A-6Bx45-HX	IL7A-6BSx45-HX	1000	3/8-16	1/2	2	4-1/2	11/16
IL7A-6Bx6-HX	IL7A-6BSx6-HX	1000	3/8-16	1/2	2	6	11/16
IL7A-6FBx1	IL7A-6FBSx1	1000	3/8-24	1/2	2	1	11/16
IL7A-6FBx2	IL7A-6FBSx2	1000	3/8-24	1/2	2	2	11/16
IL7A-7B	IL7A-7BS	2000	1/2-13	1/2	2	1-9/16	11/16
IL7A-7Bx2	IL7A-7BSx2	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx2-HX	IL7A-7BSx2-HX	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx25-HX	IL7A-7BSx25-HX	2000	1/2-13	1/2	2	2-1/2	11/16
IL7A-7Bx3	IL7A-7BSx3	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx3-HX	IL7A-7BSx3-HX	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx35-HX	IL7A-7BSx35-HX	2000	1/2-13	1/2	2	3-1/2	11/16
IL7A-7Bx4	IL7A-7BSx4	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx4-HX	IL7A-7BSx4-HX	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx5	IL7A-7BSx5	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx5-HX	IL7A-7BSx5-HX	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx6-HX	IL7A-7BSx6-HX	1500	1/2-13	1/2	2	6	11/16
IL7A-7Bx8-HX	IL7A-7BSx8-HX	1000	1/2-13	1/2	2	8	11/16
IL7A-7FBx1	IL7A-7FBSx1	2000	1/2-20	1/2	2	1	11/16
IL7A-7FBx2	IL7A-7FBSx2	2000	1/2-20	1/2	2	2	11/16
IL7A-7FBx4	IL7A-7FBSx4	2000	1/2-20	1/2	2	4	11/16
IL7A-8B	IL7A-8BS	2500	5/8-11	5/8	2	1-9/16	11/16
IL7A-8Bx3	IL7A-8BSx3	2500	5/8-11	5/8	2	3	11/16
IL7A-8Bx4	IL7A-8BSx4	2500	5/8-11	5/8	2	4	11/16
IL7A-8Bx5	IL7A-8BSx5	2500	5/8-11	5/8	2	5	11/16
IL7A-9B	IL7A-9BS	3000	3/4-10	3/4	2	1-9/16	11/16
IL7A-9Bx3	IL7A-9BSx3	3000	3/4-10	3/4	2	3	11/16
IL7A-9Bx4	IL7A-9BSx4	3000	3/4-10	3/4	2	4	11/16
IL7M-4Bx1/2	IL7M-4BSx1/2	100	1/4-20	1/2	2-1/2	1/2	11/16
IL7M-4Bx1	IL7M-4BSx1	100	1/4-20	1/2	2-1/2	1	11/16
IL7M-4B	IL7M-4BS	100	1/4-20	1/2	2-1/2	1-9/16	11/16
IL7M-4Bx2-HX	IL7M-4BSx2-HX	100	1/4-20	1/2	2-1/2	2	11/16
IL7M-4Bx25	IL7M-4BSx25	100	1/4-20	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3/4	IL7M-5BSx3/4	500	5/16-18	1/2	2-1/2	3/4	11/16
IL7M-5Bx15-HX	IL7M-5BSx15-HX	500	5/16-18	1/2	2-1/2	1-1/2	11/16
IL7M-5B	IL7M-5BS	500	5/16-18	1/2	2-1/2	1-9/16	11/16
IL7M-5Bx25-HX	IL7M-5BSx25-HX	500	5/16-18	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3	IL7M-5BSx3	500	5/16-18	1/2	2-1/2	3	11/16
IL7M-5Bx4	IL7M-5BSx4	500	5/16-18	1/2	2-1/2	4	11/16
IL7M-6Bx3/4	IL7M-6BSx3/4	1000	3/8-16	1/2	2-1/2	3/4	11/16
IL7M-6Bx15-HX	IL7M-6BSx15-HX	1000	3/8-16	1/2	2-1/2	1-1/2	11/16
IL7M-6B	IL7M-6BS	1000	3/8-16	1/2	2-1/2	1-9/16	11/16
IL7M-6Bx1	IL7M-6BSx1	1000	3/8-16	1/2	2-1/2	1	11/16
IL7M-6Bx2	IL7M-6BSx2	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx2-HX	IL7M-6BSx2-HX	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx3	IL7M-6BSx3	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx3-HX	IL7M-6BSx3-HX	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx4	IL7M-6BSx4	1000	3/8-16	1/2	2-1/2	4	11/16
IL7M-6Bx45-HX	IL7M-6BSx45-HX	1000	3/8-16	1/2	2-1/2	4-1/2	11/16
IL7M-6Bx6-HX	IL7M-6BSx6-HX	1000	3/8-16	1/2	2-1/2	6	11/16
IL7M-6FBx1	IL7M-6FBSx1	1000	3/8-24	1/2	2-1/2	1	11/16
IL7M-6FBx2	IL7M-6FBSx2	1000	3/8-24	1/2	2-1/2	2	11/16



POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

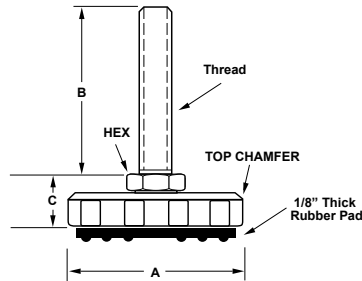

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL8-7FBx1-P	IL8-7FBSx1-P	2000	1/2-20	1/2	1-1/2	1	11/16
IL8-7FBx2-P	IL8-7FBSx2-P	2000	1/2-20	1/2	1-1/2	2	11/16
IL8-7FBx4-P	IL8-7FBSx4-P	2000	1/2-20	1/2	1-1/2	4	11/16
IL8-8B-P	IL8-8BS-P	2500	5/8-11	5/8	1-1/2	1-9/16	11/16
IL8-8Bx3-P	IL8-8BSx3-P	2500	5/8-11	5/8	1-1/2	3	11/16
IL8-8Bx4-P	IL8-8BSx4-P	2500	5/8-11	5/8	1-1/2	4	11/16
IL8-8Bx5-P	IL8-8BSx5-P	2500	5/8-11	5/8	1-1/2	5	11/16
IL8-9B-P	IL8-9BS-P	3000	3/4-10	3/4	1-1/2	1-9/16	11/16
IL8-9Bx3-P	IL8-9BSx3-P	3000	3/4-10	3/4	1-1/2	3	11/16
IL8-9Bx4-P	IL8-9BSx4-P	3000	3/4-10	3/4	1-1/2	4	11/16
IL7A-4Bx1/2-P	IL7A-4BSx1/2-P	100	1/4-20	1/2	2	1/2	11/16
IL7A-4Bx1-P	IL7A-4BSx1-P	100	1/4-20	1/2	2	1	11/16
IL7A-4B-P	IL7A-4BS-P	100	1/4-20	1/2	2	1-9/16	11/16
IL7A-4Bx2-HX-P	IL7A-4BSx2-HX-P	100	1/4-20	1/2	2	2	11/16
IL7A-4Bx25-P	IL7A-4BSx25-P	100	1/4-20	1/2	2	2-1/2	11/16
IL7A-5Bx3/4-P	IL7A-5BSx3/4-P	500	5/16-18	1/2	2	3/4	11/16
IL7A-5Bx15-HX-P	IL7A-5BSx15-HX-P	500	5/16-18	1/2	2	1-1/2	11/16
IL7A-5B-P	IL7A-5BS-P	500	5/16-18	1/2	2	1-9/16	11/16
IL7A-5Bx25-HX-P	IL7A-5BSx25-HX-P	500	5/16-18	1/2	2	2-1/2	11/16
IL7A-5Bx3-P	IL7A-5BSx3-P	500	5/16-18	1/2	2	3	11/16
IL7A-5Bx4-P	IL7A-5BSx4-P	500	5/16-18	1/2	2	4	11/16
IL7A-6Bx3/4-P	IL7A-6BSx3/4-P	1000	3/8-16	1/2	2	3/4	11/16
IL7A-6Bx15-HX-P	IL7A-6BSx15-HX-P	1000	3/8-16	1/2	2	1-1/2	11/16
IL7A-6B-P	IL7A-6BS-P	1000	3/8-16	1/2	2	1-9/16	11/16
IL7A-6Bx1-P	IL7A-6BSx1-P	1000	3/8-16	1/2	2	1	11/16
IL7A-6Bx2-P	IL7A-6BSx2-P	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx2-HX-P	IL7A-6BSx2-HX-P	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx3-P	IL7A-6BSx3-P	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx3-HX-P	IL7A-6BSx3-HX-P	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx4-P	IL7A-6BSx4-P	1000	3/8-16	1/2	2	4	11/16
IL7A-6Bx45-HX-P	IL7A-6BSx45-HX-P	1000	3/8-16	1/2	2	4-1/2	11/16
IL7A-6Bx6-HX-P	IL7A-6BSx6-HX-P	1000	3/8-16	1/2	2	6	11/16
IL7A-6FBx1-P	IL7A-6FBSx1-P	1000	3/8-24	1/2	2	1	11/16
IL7A-6FBx2-P	IL7A-6FBSx2-P	1000	3/8-24	1/2	2	2	11/16
IL7A-7B-P	IL7A-7BS-P	2000	1/2-13	1/2	2	1-9/16	11/16
IL7A-7Bx2-P	IL7A-7BSx2-P	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx2-HX-P	IL7A-7BSx2-HX-P	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx25-HX-P	IL7A-7BSx25-HX-P	2000	1/2-13	1/2	2	2-1/2	11/16
IL7A-7Bx3-P	IL7A-7BSx3-P	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx3-HX-P	IL7A-7BSx3-HX-P	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx35-HX-P	IL7A-7BSx35-HX-P	2000	1/2-13	1/2	2	3-1/2	11/16
IL7A-7Bx4-P	IL7A-7BSx4-P	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx4-HX-P	IL7A-7BSx4-HX-P	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx5-P	IL7A-7BSx5-P	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx5-HX-P	IL7A-7BSx5-HX-P	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx6-HX-P	IL7A-7BSx6-HX-P	1500	1/2-13	1/2	2	6	11/16
IL7A-7Bx8-HX-P	IL7A-7BSx8-HX-P	1000	1/2-13	1/2	2	8	11/16
IL7A-7FBx1-P	IL7A-7FBSx1-P	2000	1/2-20	1/2	2	1	11/16
IL7A-7FBx2-P	IL7A-7FBSx2-P	2000	1/2-20	1/2	2	2	11/16
IL7A-7FBx4-P	IL7A-7FBSx4-P	2000	1/2-20	1/2	2	4	11/16
IL7A-8B-P	IL7A-8BS-P	2500	5/8-11	5/8	2	1-9/16	11/16
IL7A-8Bx3-P	IL7A-8BSx3-P	2500	5/8-11	5/8	2	3	11/16
IL7A-8Bx4-P	IL7A-8BSx4-P	2500	5/8-11	5/8	2	4	11/16
IL7A-8Bx5-P	IL7A-8BSx5-P	2500	5/8-11	5/8	2	5	11/16
IL7A-9B-P	IL7A-9BS-P	3000	3/4-10	3/4	2	1-9/16	11/16
IL7A-9Bx3-P	IL7A-9BSx3-P	3000	3/4-10	3/4	2	3	11/16
IL7A-9Bx4-P	IL7A-9BSx4-P	3000	3/4-10	3/4	2	4	11/16
IL7M-4Bx1/2-P	IL7M-4BSx1/2-P	100	1/4-20	1/2	2-1/2	1/2	11/16
IL7M-4Bx1-P	IL7M-4BSx1-P	100	1/4-20	1/2	2-1/2	1	11/16
IL7M-4B-P	IL7M-4BS-P	100	1/4-20	1/2	2-1/2	1-9/16	11/16
IL7M-4Bx2-HX-P	IL7M-4BSx2-HX-P	100	1/4-20	1/2	2-1/2	2	11/16
IL7M-4Bx25-P	IL7M-4BSx25-P	100	1/4-20	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3/4-P	IL7M-5BSx3/4-P	500	5/16-18	1/2	2-1/2	3/4	11/16
IL7M-5Bx15-HX-P	IL7M-5BSx15-HX-P	500	5/16-18	1/2	2-1/2	1-1/2	11/16
IL7M-5B-P	IL7M-5BS-P	500	5/16-18	1/2	2-1/2	1-9/16	11/16
IL7M-5Bx25-HX-P	IL7M-5BSx25-HX-P	500	5/16-18	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3-P	IL7M-5BSx3-P	500	5/16-18	1/2	2-1/2	3	11/16
IL7M-5Bx4-P	IL7M-5BSx4-P	500	5/16-18	1/2	2-1/2	4	11/16
IL7M-6Bx3/4-P	IL7M-6BSx3/4-P	1000	3/8-16	1/2	2-1/2	3/4	11/16
IL7M-6Bx15-HX-P	IL7M-6BSx15-HX-P	1000	3/8-16	1/2	2-1/2	1-1/2	11/16
IL7M-6B-P	IL7M-6BS-P	1000	3/8-16	1/2	2-1/2	1-9/16	11/16
IL7M-6Bx1-P	IL7M-6BSx1-P	1000	3/8-16	1/2	2-1/2	1	11/16
IL7M-6Bx2-P	IL7M-6BSx2-P	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx2-HX-P	IL7M-6BSx2-HX-P	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx3-P	IL7M-6BSx3-P	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx3-HX-P	IL7M-6BSx3-HX-P	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx4-P	IL7M-6BSx4-P	1000	3/8-16	1/2	2-1/2	4	11/16
IL7M-6Bx45-HX-P	IL7M-6BSx45-HX-P	1000	3/8-16	1/2	2-1/2	4-1/2	11/16
IL7M-6Bx6-HX-P	IL7M-6BSx6-HX-P	1000	3/8-16	1/2	2-1/2	6	11/16
IL7M-6FBx1-P	IL7M-6FBSx1-P	1000	3/8-24	1/2	2-1/2	1	11/16
IL7M-6FBx2-P	IL7M-6FBSx2-P	1000	3/8-24	1/2	2-1/2	2	11/16



POLY BASE FIXED STUD GLIDES


The IEC Poly Base Steel and Stainless Steel Fixed Stud Glide is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

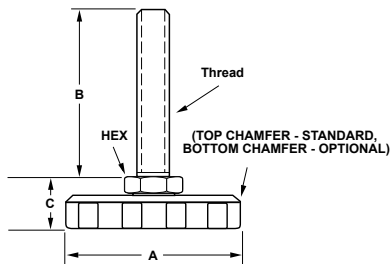

Optional bottom chamfer (reverse assembly) – with 90° top edge

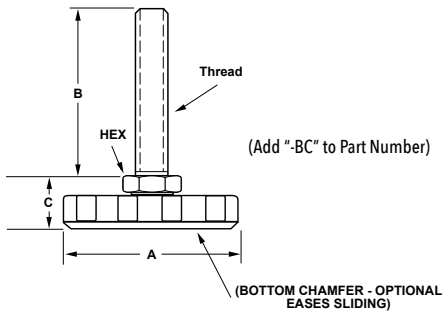

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-7B	IL7M-7BS	2000	1/2-13	1/2	2-1/2	1-9/16	11/16
IL7M-7Bx2	IL7M-7BSx2	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx2-HX	IL7M-7BSx2-HX	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx25-HX	IL7M-7BSx25-HX	2000	1/2-13	1/2	2-1/2	2-1/2	11/16
IL7M-7Bx3	IL7M-7BSx3	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx3-HX	IL7M-7BSx3-HX	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx35-HX	IL7M-7BSx35-HX	2000	1/2-13	1/2	2-1/2	3-1/2	11/16
IL7M-7Bx4	IL7M-7BSx4	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx4-HX	IL7M-7BSx4-HX	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx5	IL7M-7BSx5	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx5-HX	IL7M-7BSx5-HX	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx6-HX	IL7M-7BSx6-HX	1500	1/2-13	1/2	2-1/2	6	11/16
IL7M-7Bx8-HX	IL7M-7BSx8-HX	1000	1/2-13	1/2	2-1/2	8	11/16
IL7M-7FBx1	IL7M-7FBSx1	2000	1/2-20	1/2	2-1/2	1	11/16
IL7M-7FBx2	IL7M-7FBSx2	2000	1/2-20	1/2	2-1/2	2	11/16
IL7M-7FBx4	IL7M-7FBSx4	2000	1/2-20	1/2	2-1/2	4	11/16
IL7M-8B	IL7M-8BS	2500	5/8-11	5/8	2-1/2	1-9/16	11/16
IL7M-8Bx3	IL7M-8BSx3	2500	5/8-11	5/8	2-1/2	3	11/16
IL7M-8Bx4	IL7M-8BSx4	2500	5/8-11	5/8	2-1/2	4	11/16
IL7M-8Bx5	IL7M-8BSx5	2500	5/8-11	5/8	2-1/2	5	11/16
IL7M-9B	IL7M-9BS	3000	3/4-10	3/4	2-1/2	1-9/16	11/16
IL7M-9Bx3	IL7M-9BSx3	3000	3/4-10	3/4	2-1/2	3	11/16
IL7M-9Bx4	IL7M-9BSx4	3000	3/4-10	3/4	2-1/2	4	11/16
IL8A-4Bx1/2	IL8A-4BSx1/2	100	1/4-20	1/2	3	1/2	11/16
IL8A-4Bx1	IL8A-4BSx1	100	1/4-20	1/2	3	1	11/16
IL8A-4B	IL8A-4BS	100	1/4-20	1/2	3	1-9/16	11/16
IL8A-4Bx2-HX	IL8A-4BSx2-HX	100	1/4-20	1/2	3	2	11/16
IL8A-4Bx25	IL8A-4BSx25	100	1/4-20	1/2	3	2-1/2	11/16
IL8A-5Bx3/4	IL8A-5BSx3/4	500	5/16-18	1/2	3	3/4	11/16
IL8A-5Bx15-HX	IL8A-5BSx15-HX	500	5/16-18	1/2	3	1-1/2	11/16
IL8A-5B	IL8A-5BS	500	5/16-18	1/2	3	1-9/16	11/16
IL8A-5Bx25-HX	IL8A-5BSx25-HX	500	5/16-18	1/2	3	2-1/2	11/16
IL8A-5Bx3	IL8A-5BSx3	500	5/16-18	1/2	3	3	11/16
IL8A-5Bx4	IL8A-5BSx4	500	5/16-18	1/2	3	4	11/16
IL8A-6Bx3/4	IL8A-6BSx3/4	1000	3/8-16	1/2	3	3/4	11/16
IL8A-6Bx15-HX	IL8A-6BSx15-HX	1000	3/8-16	1/2	3	1-1/2	11/16
IL8A-6B	IL8A-6BS	1000	3/8-16	1/2	3	1-9/16	11/16
IL8A-6Bx1	IL8A-6BSx1	1000	3/8-16	1/2	3	1	11/16
IL8A-6Bx2	IL8A-6BSx2	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx2-HX	IL8A-6BSx2-HX	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx3	IL8A-6BSx3	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx3-HX	IL8A-6BSx3-HX	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx4	IL8A-6BSx4	1000	3/8-16	1/2	3	4	11/16
IL8A-6Bx45-HX	IL8A-6BSx45-HX	1000	3/8-16	1/2	3	4-1/2	11/16
IL8A-6Bx6-HX	IL8A-6BSx6-HX	1000	3/8-16	1/2	3	6	11/16
IL8A-6FBx1	IL8A-6FBSx1	1000	3/8-24	1/2	3	1	11/16
IL8A-6FBx2	IL8A-6FBSx2	1000	3/8-24	1/2	3	2	11/16
IL8A-7B	IL8A-7BS	2000	1/2-13	1/2	3	1-9/16	11/16
IL8A-7Bx2	IL8A-7BSx2	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx2-HX	IL8A-7BSx2-HX	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx25-HX	IL8A-7BSx25-HX	2000	1/2-13	1/2	3	2-1/2	11/16
IL8A-7Bx3	IL8A-7BSx3	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx3-HX	IL8A-7BSx3-HX	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx35-HX	IL8A-7BSx35-HX	2000	1/2-13	1/2	3	3-1/2	11/16
IL8A-7Bx4	IL8A-7BSx4	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx4-HX	IL8A-7BSx4-HX	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx5	IL8A-7BSx5	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx5-HX	IL8A-7BSx5-HX	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx6-HX	IL8A-7BSx6-HX	1500	1/2-13	1/2	3	6	11/16
IL8A-7Bx8-HX	IL8A-7BSx8-HX	1000	1/2-13	1/2	3	8	11/16
IL8A-7FBx1	IL8A-7FBSx1	2000	1/2-20	1/2	3	1	11/16
IL8A-7FBx2	IL8A-7FBSx2	2000	1/2-20	1/2	3	2	11/16
IL8A-7FBx4	IL8A-7FBSx4	2000	1/2-20	1/2	3	4	11/16
IL8A-8B	IL8A-8BS	2500	5/8-11	5/8	3	1-9/16	11/16
IL8A-8Bx3	IL8A-8BSx3	2500	5/8-11	5/8	3	3	11/16
IL8A-8Bx4	IL8A-8BSx4	2500	5/8-11	5/8	3	4	11/16
IL8A-8Bx5	IL8A-8BSx5	2500	5/8-11	5/8	3	5	11/16
IL8A-9B	IL8A-9BS	3000	3/4-10	3/4	3	1-9/16	11/16
IL8A-9Bx3	IL8A-9BSx3	3000	3/4-10	3/4	3	3	11/16
IL8A-9Bx4	IL8A-9BSx4	3000	3/4-10	3/4	3	4	11/16



POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad* is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

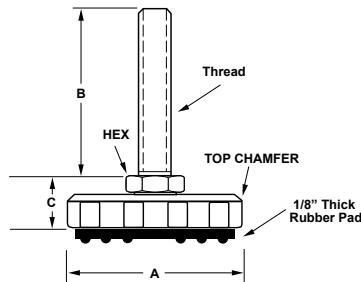

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-7B-P	IL7M-7BS-P	2000	1/2-13	1/2	2-1/2	1-9/16	11/16
IL7M-7Bx2-P	IL7M-7BSx2-P	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx2-HX-P	IL7M-7BSx2-HX-P	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx25-HX-P	IL7M-7BSx25-HX-P	2000	1/2-13	1/2	2-1/2	2-1/2	11/16
IL7M-7Bx3-P	IL7M-7BSx3-P	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx3-HX-P	IL7M-7BSx3-HX-P	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx35-HX-P	IL7M-7BSx35-HX-P	2000	1/2-13	1/2	2-1/2	3-1/2	11/16
IL7M-7Bx4-P	IL7M-7BSx4-P	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx4-HX-P	IL7M-7BSx4-HX-P	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx5-P	IL7M-7BSx5-P	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx5-HX-P	IL7M-7BSx5-HX-P	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx6-HX-P	IL7M-7BSx6-HX-P	1500	1/2-13	1/2	2-1/2	6	11/16
IL7M-7Bx8-HX-P	IL7M-7BSx8-HX-P	1000	1/2-13	1/2	2-1/2	8	11/16
IL7M-7FBx1-P	IL7M-7FBSx1-P	2000	1/2-20	1/2	2-1/2	1	11/16
IL7M-7FBx2-P	IL7M-7FBSx2-P	2000	1/2-20	1/2	2-1/2	2	11/16
IL7M-7FBx4-P	IL7M-7FBSx4-P	2000	1/2-20	1/2	2-1/2	4	11/16
IL7M-8B-P	IL7M-8BS-P	2500	5/8-11	5/8	2-1/2	1-9/16	11/16
IL7M-8Bx3-P	IL7M-8BSx3-P	2500	5/8-11	5/8	2-1/2	3	11/16
IL7M-8Bx4-P	IL7M-8BSx4-P	2500	5/8-11	5/8	2-1/2	4	11/16
IL7M-8Bx5-P	IL7M-8BSx5-P	2500	5/8-11	5/8	2-1/2	5	11/16
IL7M-9B-P	IL7M-9BS-P	3000	3/4-10	3/4	2-1/2	1-9/16	11/16
IL7M-9Bx3-P	IL7M-9BSx3-P	3000	3/4-10	3/4	2-1/2	3	11/16
IL7M-9Bx4-P	IL7M-9BSx4-P	3000	3/4-10	3/4	2-1/2	4	11/16
IL8A-4Bx1/2-P	IL8A-4BSx1/2-P	100	1/4-20	1/2	3	1/2	11/16
IL8A-4Bx1-P	IL8A-4BSx1-P	100	1/4-20	1/2	3	1	11/16
IL8A-4B-P	IL8A-4BS-P	100	1/4-20	1/2	3	1-9/16	11/16
IL8A-4Bx25-P	IL8A-4BSx25-P	100	1/4-20	1/2	3	2-1/2	11/16
IL8A-5Bx3/4-P	IL8A-5BSx3/4-P	500	5/16-18	1/2	3	3/4	11/16
IL8A-5Bx15-HX-P	IL8A-5BSx15-HX-P	500	5/16-18	1/2	3	1-1/2	11/16
IL8A-5B-P	IL8A-5BS-P	500	5/16-18	1/2	3	1-9/16	11/16
IL8A-5Bx25-HX-P	IL8A-5BSx25-HX-P	500	5/16-18	1/2	3	2-1/2	11/16
IL8A-5Bx3-P	IL8A-5BSx3-P	500	5/16-18	1/2	3	3	11/16
IL8A-5Bx4-P	IL8A-5BSx4-P	500	5/16-18	1/2	3	4	11/16
IL8A-6Bx3/4-P	IL8A-6BSx3/4-P	1000	3/8-16	1/2	3	3/4	11/16
IL8A-6Bx15-HX-P	IL8A-6BSx15-HX-P	1000	3/8-16	1/2	3	1-1/2	11/16
IL8A-6B-P	IL8A-6BS-P	1000	3/8-16	1/2	3	1-9/16	11/16
IL8A-6Bx1-P	IL8A-6BSx1-P	1000	3/8-16	1/2	3	1	11/16
IL8A-6Bx2-P	IL8A-6BSx2-P	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx2-HX-P	IL8A-6BSx2-HX-P	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx3-P	IL8A-6BSx3-P	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx3-HX-P	IL8A-6BSx3-HX-P	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx4-P	IL8A-6BSx4-P	1000	3/8-16	1/2	3	4	11/16
IL8A-6Bx45-HX-P	IL8A-6BSx45-HX-P	1000	3/8-16	1/2	3	4-1/2	11/16
IL8A-6Bx6-HX-P	IL8A-6BSx6-HX-P	1000	3/8-16	1/2	3	6	11/16
IL8A-6FBx1-P	IL8A-6FBSx1-P	1000	3/8-24	1/2	3	1	11/16
IL8A-6FBx2-P	IL8A-6FBSx2-P	1000	3/8-24	1/2	3	2	11/16
IL8A-7B-P	IL8A-7BS-P	2000	1/2-13	1/2	3	1-9/16	11/16
IL8A-7Bx2-P	IL8A-7BSx2-P	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx2-HX-P	IL8A-7BSx2-HX-P	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx25-HX-P	IL8A-7BSx25-HX-P	2000	1/2-13	1/2	3	2-1/2	11/16
IL8A-7Bx3-P	IL8A-7BSx3-P	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx3-HX-P	IL8A-7BSx3-HX-P	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx35-HX-P	IL8A-7BSx35-HX-P	2000	1/2-13	1/2	3	3-1/2	11/16
IL8A-7Bx4-P	IL8A-7BSx4-P	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx4-HX-P	IL8A-7BSx4-HX-P	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx5-P	IL8A-7BSx5-P	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx5-HX-P	IL8A-7BSx5-HX-P	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx6-HX-P	IL8A-7BSx6-HX-P	1500	1/2-13	1/2	3	6	11/16
IL8A-7Bx8-HX-P	IL8A-7BSx8-HX-P	1000	1/2-13	1/2	3	8	11/16
IL8A-7FBx1-P	IL8A-7FBSx1-P	2000	1/2-20	1/2	3	1	11/16
IL8A-7FBx2-P	IL8A-7FBSx2-P	2000	1/2-20	1/2	3	2	11/16
IL8A-7FBx4-P	IL8A-7FBSx4-P	2000	1/2-20	1/2	3	4	11/16
IL8A-8B-P	IL8A-8BS-P	2500	5/8-11	5/8	3	1-9/16	11/16
IL8A-8Bx3-P	IL8A-8BSx3-P	2500	5/8-11	5/8	3	3	11/16
IL8A-8Bx4-P	IL8A-8BSx4-P	2500	5/8-11	5/8	3	4	11/16
IL8A-8Bx5-P	IL8A-8BSx5-P	2500	5/8-11	5/8	3	5	11/16
IL8A-9B-P	IL8A-9BS-P	3000	3/4-10	3/4	3	1-9/16	11/16
IL8A-9Bx3-P	IL8A-9BSx3-P	3000	3/4-10	3/4	3	3	11/16
IL8A-9Bx4-P	IL8A-9BSx4-P	3000	3/4-10	3/4	3	4	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com



Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY FIXED SOCKET


POLY BASE FIXED SOCKET LEVELING GLIDES

The IEC *Poly Base Steel and Stainless Steel Fixed Socket Glide* is ideal for medium-duty load requirements. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base and large adjustment hex nut.

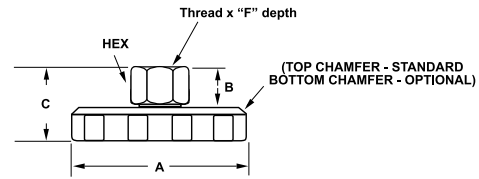

Optional bottom chamfer (reverse assembly) – with 90° top edge

(Add ".BC" to Part Number)

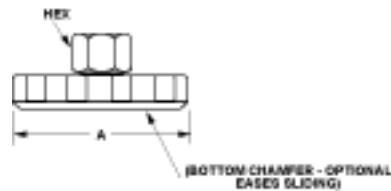

LOW PROFILE POLY FIXED — SOCKET LEVELERS

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL7-4B-T	IL7-4BS-T	100	1/4-20	1/2	1	3/16	5/8	1/4
IL7-5B-T	IL7-5BS-T	500	5/16-18	1/2	1	3/8	3/4	1/4
IL7-6B-T	IL7-6BS-T	1000	3/8-16	1/2	1	1/2	7/8	3/8
IL7-7B-T	IL7-7BS-T	2000	1/2-13	5/8	1	1/2	7/8	3/8
IL7-8B-T	IL7-8BS-T	3000	5/8-11	3/4	1	5/8	1	1/2
IL7-9B-T	IL7-9BS-T	3000	3/4-10	1	1	3/4	1-1/8	5/8
IL8-4B-T	IL8-4BS-T	100	1/4-20	1/2	1-1/2	3/16	5/8	1/4
IL8-5B-T	IL8-5BS-T	500	5/16-18	1/2	1-1/2	3/8	3/4	1/4
IL8-6B-T	IL8-6BS-T	1000	3/8-16	1/2	1-1/2	1/2	7/8	3/8
IL8-7B-T	IL8-7BS-T	2000	1/2-13	5/8	1-1/2	1/2	7/8	3/8
IL8-8B-T	IL8-8BS-T	3000	5/8-11	3/4	1-1/2	5/8	1	1/2
IL8-9B-T	IL8-9BS-T	3000	3/4-10	1	1-1/2	3/4	1-1/8	5/8
IL7A-4B-T	IL7A-4BS-T	100	1/4-20	1/2	2	3/16	5/8	1/4
IL7A-5B-T	IL7A-5BS-T	500	5/16-18	1/2	2	3/8	3/4	1/4
IL7A-6B-T	IL7A-6BS-T	1000	3/8-16	1/2	2	1/2	7/8	3/8
IL7A-7B-T	IL7A-7BS-T	2000	1/2-13	5/8	2	1/2	7/8	3/8
IL7A-8B-T	IL7A-8BS-T	3000	5/8-11	3/4	2	5/8	1	1/2
IL7A-9B-T	IL7A-9BS-T	3000	3/4-10	1	2	3/4	1-1/8	5/8
IL7M-4B-T	IL7M-4BS-T	100	1/4-20	1/2	2-1/2	3/16	5/8	1/4
IL7M-5B-T	IL7M-5BS-T	500	5/16-18	1/2	2-1/2	3/8	3/4	1/4
IL7M-6B-T	IL7M-6BS-T	1000	3/8-16	1/2	2-1/2	1/2	7/8	3/8
IL7M-7B-T	IL7M-7BS-T	2000	1/2-13	5/8	2-1/2	1/2	7/8	3/8
IL7M-8B-T	IL7M-8BS-T	3000	5/8-11	3/4	2-1/2	5/8	1	1/2
IL7M-9B-T	IL7M-9BS-T	3000	3/4-10	1	2-1/2	3/4	1-1/8	5/8
IL8A-4B-T	IL8A-4BS-T	100	1/4-20	1/2	3	3/16	5/8	1/4
IL8A-5B-T	IL8A-5BS-T	500	5/16-18	1/2	3	3/8	3/4	1/4
IL8A-6B-T	IL8A-6BS-T	1000	3/8-16	1/2	3	1/2	7/8	3/8
IL8A-7B-T	IL8A-7BS-T	2000	1/2-13	5/8	3	1/2	7/8	3/8
IL8A-8B-T	IL8A-8BS-T	3000	5/8-11	3/4	3	5/8	1	1/2
IL8A-9B-T	IL8A-9BS-T	3000	3/4-10	1	3	3/4	1-1/8	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

METRIC POLY BASE FIXED SOCKET WITH RUBBER PAD

**METRIC POLY BASE FIXED SOCKET
LEVELING GLIDES WITH RUBBER PAD**

The IEC *Metric Poly Base Steel and Stainless Steel Fixed Socket Glide with Rubber Pad* is ideal for medium-duty load requirements. The rubber pad provides a non-skid surface protecting feature. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base and large adjustment hex nut.

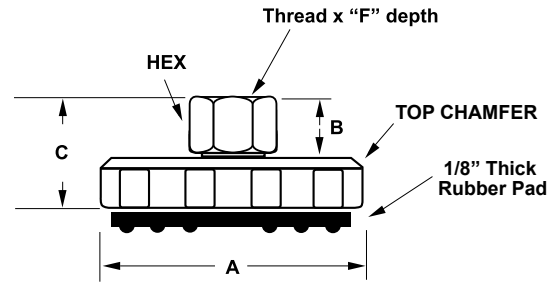

Rubber Pad Bottom View

METRIC POLY FIXED SOCKET LEVELERS WITH RUBBER PAD

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL7-M6B-T-P	IL7-M6BS-T-P	100	M6x1	1/2	1	3/16	5/8	1/4
IL7-M8B-T-P	IL7-M8BS-T-P	500	M8x1.25	1/2	1	3/8	3/4	1/4
IL7-M10B-T-P	IL7-M10BS-T-P	1000	M10x1.50	1/2	1	1/2	7/8	3/8
IL7-M12B-T-P	IL7-M12BS-T-P	2000	M12x1.75	5/8	1	1/2	7/8	3/8
IL7-M16B-T-P	IL7-M16BS-T-P	3000	M16x2.00	3/4	1	5/8	1	1/2
IL7-M20B-T-P	IL7-M20BS-T-P	3000	M20x3.00	1	1	3/4	1-1/8	5/8
IL8-M6B-T-P	IL8-M6BS-T-P	100	M6x1	1/2	1-1/2	3/16	5/8	1/4
IL8-M8B-T-P	IL8-M8BS-T-P	500	M8x1.25	1/2	1-1/2	3/8	3/4	1/4
IL8-M10B-T-P	IL8-M10BS-T-P	1000	M10x1.50	1/2	1-1/2	1/2	7/8	3/8
IL8-M12B-T-P	IL8-M12BS-T-P	2000	M12x1.75	5/8	1-1/2	1/2	7/8	3/8
IL8-M16B-T-P	IL8-M16BS-T-P	3000	M16x2.00	3/4	1-1/2	5/8	1	1/2
IL8-M20B-T-P	IL8-M20BS-T-P	3000	M20x3.00	1	1-1/2	3/4	1-1/8	5/8
IL7A-M6B-T-P	IL7A-M6BS-T-P	100	M6x1	1/2	2	3/16	5/8	1/4
IL7A-M8B-T-P	IL7A-M8BS-T-P	500	M8x1.25	1/2	2	3/8	3/4	1/4
IL7A-M10B-T-P	IL7A-M10BS-T-P	1000	M10x1.50	1/2	2	1/2	7/8	3/8
IL7A-M12B-T-P	IL7A-M12BS-T-P	2000	M12x1.75	5/8	2	1/2	7/8	3/8
IL7A-M16B-T-P	IL7A-M16BS-T-P	3000	M16x2.00	3/4	2	5/8	1	1/2
IL7A-M20B-T-P	IL7A-M20BS-T-P	3000	M20x3.00	1	2	3/4	1-1/8	5/8
IL7M-M6B-T-P	IL7M-M6BS-T-P	100	M6x1	1/2	2-1/2	3/16	5/8	1/4
IL7M-M8B-T-P	IL7M-M8BS-T-P	500	M8x1.25	1/2	2-1/2	3/8	3/4	1/4
IL7M-M10B-T-P	IL7M-M10BS-T-P	1000	M10x1.50	1/2	2-1/2	1/2	7/8	3/8
IL7M-M12B-T-P	IL7M-M12BS-T-P	2000	M12x1.75	5/8	2-1/2	1/2	7/8	3/8
IL7M-M16B-T-P	IL7M-M16BS-T-P	3000	M16x2.00	3/4	2-1/2	5/8	1	1/2
IL7M-M20B-T-P	IL7M-M20BS-T-P	3000	M20x3.00	1	2-1/2	3/4	1-1/8	5/8
IL8A-M6B-T-P	IL8A-M6BS-T-P	100	M6x1.0	1/2	3	3/16	5/8	1/4
IL8A-M8B-T-P	IL8A-M8BS-T-P	500	M8x1.25	1/2	3	3/8	3/4	1/4
IL8A-M10B-T-P	IL8A-M10BS-T-P	1000	M10x1.50	1/2	3	1/2	7/8	3/8
IL8A-M12B-T-P	IL8A-M12BS-T-P	2000	M12x1.75	5/8	3	1/2	7/8	3/8
IL8A-M16B-T-P	IL8A-M16BS-T-P	3000	M16x2.00	3/4	3	5/8	1	1/2
IL8A-M20B-T-P	IL8A-M20BS-T-P	3000	M20x3.00	1	3	3/4	1-1/8	5/8



METRIC POLY BASE FIXED STUD LEVELING GLIDES


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

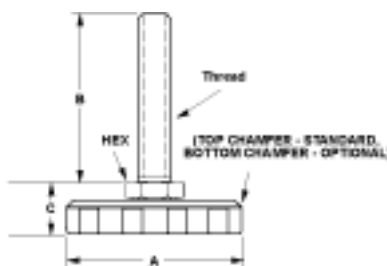

Optional bottom chamfer (reverse assembly) – with 90° top edge

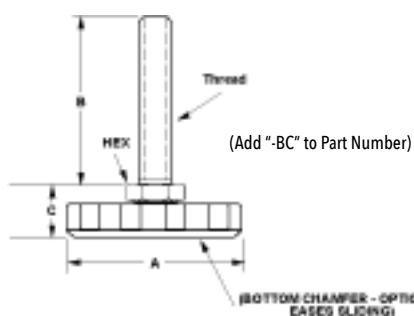

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-M6Bx25	IL7-M6BSx25	100	M6	1/2	1	25	11/16
IL7-M6Bx38	IL7-M6BSx38	100	M6	1/2	1	38	11/16
IL7-M6Bx51	IL7-M6BSx51	100	M6	1/2	1	51	11/16
IL7-M8Bx38	IL7-M8BSx38	500	M8	1/2	1	38	11/16
IL7-M8Bx51	IL7-M8BSx51	500	M8	1/2	1	51	11/16
IL7-M8Bx62	IL7-M8BSx62	500	M8	1/2	1	62	11/16
IL7-M10Bx38	IL7-M10BSx38	1000	M10	1/2	1	38	11/16
IL7-M10Bx51	IL7-M10BSx51	1000	M10	1/2	1	51	11/16
IL7-M10Bx62	IL7-M10BSx62	1000	M10	1/2	1	62	11/16
IL7-M12Bx38	IL7-M12BSx38	2000	M12	1/2	1	38	11/16
IL7-M12Bx51	IL7-M12BSx51	2000	M12	1/2	1	51	11/16
IL7-M12Bx75	IL7-M12BSx75	2000	M12	1/2	1	75	11/16
IL7-M12Bx102	IL7-M12BSx102	2000	M12	1/2	1	102	11/16
IL7-M16Bx51	IL7-M16BSx51	2500	M16	5/8	1	51	11/16
IL7-M16Bx90-BR	IL7-M16BSx90-BR	2500	M16	5/8	1	90	11/16
IL7-M16Bx102	IL7-M16BSx102	2500	M16	5/8	1	102	11/16
IL7-M16Bx115-BR	IL7-M16BSx115-BR	2500	M16	5/8	1	115	11/16
IL8-M6Bx25	IL8-M6BSx25	100	M6	1/2	1-1/2	25	11/16
IL8-M6Bx38	IL8-M6BSx38	100	M6	1/2	1-1/2	38	11/16
IL8-M6Bx51	IL8-M6BSx51	100	M6	1/2	1-1/2	51	11/16
IL8-M8Bx38	IL8-M8BSx38	500	M8	1/2	1-1/2	38	11/16
IL8-M8Bx51	IL8-M8BSx51	500	M8	1/2	1-1/2	51	11/16
IL8-M8Bx62	IL8-M8BSx62	500	M8	1/2	1-1/2	62	11/16
IL8-M10Bx38	IL8-M10BSx38S	1000	M10	1/2	1-1/2	38	11/16
IL8-M10Bx51	IL8-M10BSx51S	1000	M10	1/2	1-1/2	51	11/16
IL8-M10Bx62	IL8-M10BSx62S	1000	M10	1/2	1-1/2	62	11/16
IL8-M12Bx38	IL8-M12BSx38	2000	M12	1/2	1-1/2	38	11/16
IL8-M12Bx51	IL8-M12BSx51	2000	M12	1/2	1-1/2	51	11/16
IL8-M12Bx75	IL8-M12BSx75	2000	M12	1/2	1-1/2	75	11/16
IL8-M12Bx102	IL8-M12BSx102	2000	M12	1/2	1-1/2	102	11/16
IL8-M16Bx51	IL8-M16BSx51	2500	M16	5/8	1-1/2	51	11/16
IL8-M16Bx90-BR	IL8-M16BSx90-BR	2500	M16	5/8	1-1/2	90	11/16
IL8-M16Bx102	IL8-M16BSx102	2500	M16	5/8	1-1/2	102	11/16
IL8-M16Bx115-BR	IL8-M16BSx115-BR	2500	M16	5/8	1-1/2	115	11/16
IL7A-M6Bx25	IL7A-M6BSx25	100	M6	1/2	2	25	11/16
IL7A-M6Bx38	IL7A-M6BSx38	100	M6	1/2	2	38	11/16
IL7A-M6Bx51	IL7A-M6BSx51	100	M6	1/2	2	51	11/16
IL7A-M8Bx38	IL7A-M8BSx38	500	M8	1/2	2	38	11/16
IL7A-M8Bx51	IL7A-M8BSx51	500	M8	1/2	2	51	11/16
IL7A-M8Bx62	IL7A-M8BSx62	500	M8	1/2	2	62	11/16
IL7A-M10Bx38	IL7A-M10BSx38	1000	M10	1/2	2	38	11/16
IL7A-M10Bx51	IL7A-M10BSx51	1000	M10	1/2	2	51	11/16
IL7A-M10Bx62	IL7A-M10BSx62	1000	M10	1/2	2	62	11/16
IL7A-M12Bx38	IL7A-M12BSx38	2000	M12	1/2	2	38	11/16
IL7A-M12Bx51	IL7A-M12BSx51	2000	M12	1/2	2	51	11/16
IL7A-M12Bx75	IL7A-M12BSx75	2000	M12	1/2	2	75	11/16
IL7A-M12Bx102	IL7A-M12BSx102	2000	M12	1/2	2	102	11/16
IL7A-M16Bx51	IL7A-M16BSx51	2500	M16	5/8	2	51	11/16
IL7A-M16Bx90-BR	IL7A-M16BSx90-BR	2500	M16	5/8	2	90	11/16
IL7A-M16Bx102	IL7A-M16BSx102	2500	M16	5/8	2	102	11/16
IL7A-M16Bx115-BR	IL7A-M16BSx115-BR	2500	M16	5/8	2	115	11/16


MEDIUM-DUTY LEVELERS
POLY FIXED - METRIC
KNOB STYLE GLIDES
METRIC POLY BASE FIXED STUD LEVELING GLIDES


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

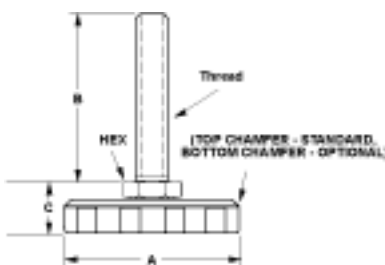

Optional bottom chamfer (reverse assembly) – with 90° top edge

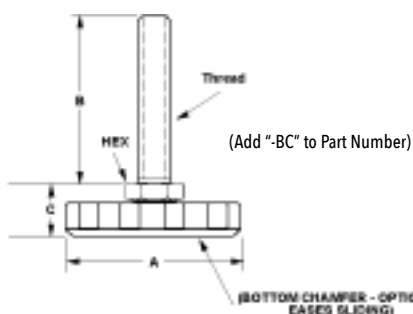
KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These *low-profile polypropylene levelers/knobs* are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.



Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-M6Bx25	IL7M-M6BSx25	100	M6	1/2	2-1/2	25	11/16
IL7M-M6Bx38	IL7M-M6BSx38	100	M6	1/2	2-1/2	38	11/16
IL7M-M6Bx51	IL7M-M6BSx51	100	M6	1/2	2-1/2	51	11/16
IL7M-M8Bx38	IL7M-M8BSx38	500	M8	1/2	2-1/2	38	11/16
IL7M-M8Bx51	IL7M-M8BSx51	500	M8	1/2	2-1/2	51	11/16
IL7M-M8Bx62	IL7M-M8BSx62	500	M8	1/2	2-1/2	62	11/16
IL7M-M10Bx38	IL7M-M10BSx38	1000	M10	1/2	2-1/2	38	11/16
IL7M-M10Bx51	IL7M-M10BSx51	1000	M10	1/2	2-1/2	51	11/16
IL7M-M10Bx62	IL7M-M10BSx62	1000	M10	1/2	2-1/2	62	11/16
IL7M-M12Bx38	IL7M-M12BSx38	2000	M12	1/2	2-1/2	38	11/16
IL7M-M12Bx51	IL7M-M12BSx51	2000	M12	1/2	2-1/2	51	11/16
IL7M-M12Bx75	IL7M-M12BSx75	2000	M12	1/2	2-1/2	75	11/16
IL7M-M12Bx102	IL7M-M12BSx102	2000	M12	1/2	2-1/2	102	11/16
IL7M-M16Bx51	IL7M-M16BSx51	2500	M16	5/8	2-1/2	51	11/16
IL7M-M16Bx90-BR	IL7M-M16BSx90-BR	2500	M16	5/8	2-1/2	90	11/16
IL7M-M16Bx102	IL7M-M16BSx102	2500	M16	5/8	2-1/2	102	11/16
IL7M-M16Bx115-BR	IL7M-M16BSx115-BR	2500	M16	5/8	2-1/2	115	11/16
IL8A-M6Bx25	IL8A-M6BSx25	100	M6	1/2	3	25	11/16
IL8A-M6Bx38	IL8A-M6BSx38	100	M6	1/2	3	38	11/16
IL8A-M6Bx51	IL8A-M6BSx51	100	M6	1/2	3	51	11/16
IL8A-M8Bx38	IL8A-M8BSx38	500	M8	1/2	3	38	11/16
IL8A-M8Bx51	IL8A-M8BSx51	500	M8	1/2	3	51	11/16
IL8A-M8Bx62	IL8A-M8BSx62	500	M8	1/2	3	62	11/16
IL8A-M10Bx38	IL8A-M10BSx38	1000	M10	1/2	3	38	11/16
IL8A-M10Bx51	IL8A-M10BSx51	1000	M10	1/2	3	51	11/16
IL8A-M10Bx62	IL8A-M10BSx62	1000	M10	1/2	3	62	11/16
IL8A-M12Bx38	IL8A-M12BSx38	2000	M12	1/2	3	38	11/16
IL8A-M12Bx51	IL8A-M12BSx51	2000	M12	1/2	3	51	11/16
IL8A-M12Bx75	IL8A-M12BSx75	2000	M12	1/2	3	75	11/16
IL8A-M12Bx102	IL8A-M12BSx102	2000	M12	1/2	3	102	11/16
IL8A-M16Bx51	IL8A-M16BSx51	2500	M16	5/8	3	51	11/16
IL8A-M16Bx90-BR	IL8A-M16BSx90-BR	2500	M16	5/8	3	90	11/16
IL8A-M16Bx102	IL8A-M16BSx102	2500	M16	5/8	3	102	11/16
IL8A-M16Bx115-BR	IL8A-M16BSx115-BR	2500	M16	5/8	3	115	11/16

PN (brass)	PN (hex nut)	PN (molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75




KNOB STYLE GLIDES

The IEC Knob Style Steel and Stainless Steel Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.



Many colors available as custom option.


 Top Hex (-HX)
and Slot (-SL)

36 - Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
36-Steel and Stainless Steel Knob Style (PVC Base) Glides						
IL82-4Bx1/4-PVC	IL82-4BSx1/4-PVC	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2-PVC	IL82-4BSx1/2-PVC	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1-PVC	IL82-4BSx1-PVC	100	1/4-20	1-1/2	1	3/8
IL82-4Bx125-PVC	IL82-4BSx125-PVC	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx175-PVC	IL82-4BSx175-PVC	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2-PVC	IL82-4BSx2-PVC	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275-PVC	IL82-4BSx275-PVC	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/2-PVC	IL82-5BSx1/2-PVC	100	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1-PVC	IL82-5BSx1-PVC	100	5/16-18	1-1/2	1	3/8
IL82-5Bx125-PVC	IL82-5BSx125-PVC	100	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175-PVC	IL82-5BSx175-PVC	100	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL-PVC	100	5/16-18	1-1/2	2-1/4	3/8	
IL82-6Bx1/2-PVC	IL82-6BSx1/2-PVC	100	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1-PVC	IL82-6BSx1-PVC	100	3/8-16	1-1/2	1	3/8
IL82-6Bx125-PVC	IL82-6BSx125-PVC	100	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx175-PVC	IL82-6BSx175-PVC	100	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238-PVC	IL82-6BSx238-PVC	100	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL-PVC	100	3/8-16	1-1/2	2-3/4	3/8	
IL82-6Bx338-HX-SL-PVC	100	3/8-16	1-1/2	3-3/8	3/8	
IL84-4Bx1/2-PVC	100	1/4-20	2	1/2	3/8	
IL84-4Bx1-HX-SL-PVC	100	1/4-20	2	1	3/8	
IL84-4Bx125-HX-SL-PVC	100	1/4-20	2	1-1/4	3/8	
IL84-4Bx175-HX-SL-PVC	100	1/4-20	2	1-3/4	3/8	
IL84-4Bx225-HX-SL-PVC	100	1/4-20	2	2-1/4	3/8	
IL84-5Bx1/2-PVC	100	5/16-18	2	1/2	3/8	
IL84-5Bx1-HX-SL-PVC	100	5/16-18	2	1	3/8	
IL84-5Bx125-HX-SL-PVC	100	5/16-18	2	1-1/4	3/8	
IL84-5Bx175-HX-SL-PVC	100	5/16-18	2	1-3/4	3/8	
IL84-5Bx225-HX-SL-PVC	100	5/16-18	2	2-1/4	3/8	
IL84-6Bx1/2-PVC	100	3/8-16	2	1/2	3/8	
IL84-6Bx1-HX-SL-PVC	100	3/8-16	2	1	3/8	
IL84-6Bx125-HX-SL-PVC	100	3/8-16	2	1-1/4	3/8	
IL84-6Bx175-HX-SL-PVC	100	3/8-16	2	1-3/4	3/8	
IL84-6Bx238-HX-SL-PVC	100	3/8-16	2	2-3/8	3/8	
IL84-6Bx275-HX-SL-PVC	100	3/8-16	2	2-3/4	3/8	
IL84-6Bx338-HX-SL-PVC	100	3/8-16	2	3-3/8	3/8	

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL82-4Bx1/4	IL82-4BSx1/4	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2	IL82-4BSx1/2	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1/2-HX-SL		100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx3/4	IL82-4BSx3/4	100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx125		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx1	IL82-4BSx1	100	1/4-20	1-1/2	1	3/8
IL82-4Bx1-HX-SL		100	1/4-20	1-1/2	1	3/8
IL82-4Bx125	IL82-4BSx125	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx150	IL82-4BSx150	100	1/4-20	1-1/2	1-1/2	3/8
IL82-4Bx175	IL82-4BSx175	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2	IL82-4BSx2	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275	IL82-4BSx275	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/4	IL82-5BSx1/4	500	5/16-18	1-1/2	1/4	3/8
IL82-5Bx1/2	IL82-5BSx1/2	500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1/2-HX-SL		500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx3/4	IL82-5BSx3/4	500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx1	IL82-5BSx1	500	5/16-18	1-1/2	1	3/8
IL82-5Bx1-HX-SL		500	5/16-18	1-1/2	1	3/8
IL82-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx125	IL82-5BSx125	500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175	IL82-5BSx175	500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/4	IL82-6BSx1/4	1000	3/8-16	1-1/2	1/4	3/8
IL82-6Bx1/2	IL82-6BSx1/2	1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1/2-HX-SL		1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	3/8
IL82-6Bx1	IL82-6BSx1	1000	3/8-16	1-1/2	1	3/8
IL82-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	3/8
IL82-6Bx125	IL82-6BSx125	1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx150	IL82-6BSx150	1000	3/8-16	1-1/2	1-1/2	3/8
IL82-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx175	IL82-6BSx175	1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238	IL82-6BSx238	1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	3/8
IL82-7Bx3/4	IL82-7BSx3/4	1000	1/2-13	1-1/2	3/4	3/8
IL82-7Bx1	IL82-7BSx1	1000	1/2-13	1-1/2	1	3/8
IL82-7Bx125	IL82-7BSx125	1000	1/2-13	1-1/2	1-1/4	3/8
IL82-7Bx150	IL82-7BSx150	1000	1/2-13	1-1/2	1-1/2	3/8
IL82-7Bx238		1000	1/2-13	1-1/2	2-3/8	3/8
IL84-4Bx1/4	IL84-4BSx1/4	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2	IL84-4BSx1/2	100	1/4-20	2	1/2	3/8
IL84-4Bx1/2-HX-SL		100	1/4-20	2	1/2	3/8
IL84-4Bx3/4	IL84-4BSx3/4	100	1/4-20	2	3/4	3/8
IL84-4Bx3/4-HX-SL		100	1/4-20	2	3/4	3/8
IL84-4Bx1	IL84-4BSx1	100	1/4-20	2	1	3/8
IL84-4Bx1-HX-SL		100	1/4-20	2	1	3/8
IL84-4Bx125	IL84-4BSx125	100	1/4-20	2	1-1/4	3/8
IL84-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-4Bx150	IL84-4BSx150	100	1/4-20	2	1-1/2	3/8
IL84-4Bx175	IL84-4BSx175	100	1/4-20	2	1-3/4	3/8
IL84-4Bx175-HX-SL		100	1/4-20	2	1-3/4	3/8
IL84-4Bx2	IL84-4BSx2	100	1/4-20	2	2	3/8
IL84-4Bx275	IL84-4BSx275	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/4	IL84-5BSx1/4	500	5/16-18	2	1/4	3/8
IL84-5Bx1/2	IL84-5BSx1/2	500	5/16-18	2	1/2	3/8
IL84-5Bx1/2-HX-SL		500	5/16-18	2	1/2	3/8
IL84-5Bx3/4	IL84-5BSx3/4	500	5/16-18	2	3/4	3/8
IL84-5Bx3/4-HX-SL		500	5/16-18	2	3/4	3/8
IL84-5Bx1	IL84-5BSx1	500	5/16-18	2	1	3/8
IL84-5Bx1-HX-SL		500	5/16-18	2	1	3/8
IL84-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-5Bx125	IL84-5BSx125	500	5/16-18	2	1-1/4	3/8
IL84-5Bx175	IL84-5BSx175	500	5/16-18	2	1-3/4	3/8
IL84-5Bx175-HX-SL		500	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL		500	5/16-18	2	2-1/4	3/8


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**KNOB STYLE GLIDES****KNOB STYLE GLIDES**

The IEC Knob Style Steel and Stainless Steel Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

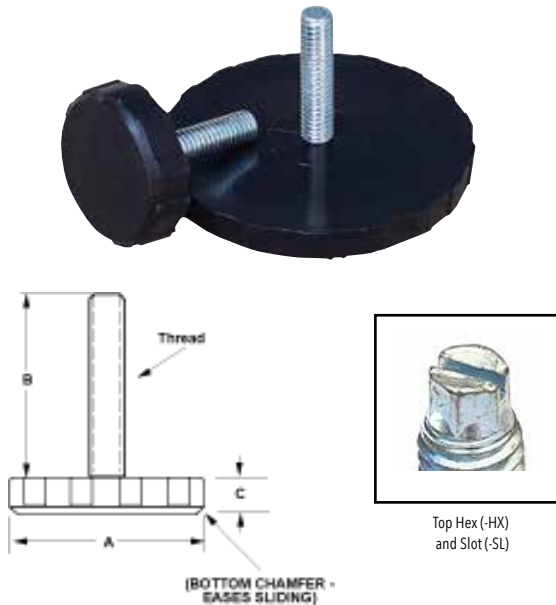**Threaded Nylon Knob Hubs/Sleeves**

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS

P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL84-6Bx1/4	IL84-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-6Bx1/2	IL84-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-6Bx1	IL84-6BSx1	1000	3/8-16	2	1	3/8
IL84-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-6Bx125	IL84-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-6Bx150	IL84-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-6Bx175	IL84-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-6Bx238	IL84-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-7Bx3/4	IL84-7BSx3/4	1000	1/2-13	2	3/4	3/8
IL84-7Bx1	IL84-7BSx1	1000	1/2-13	2	1	3/8
IL84-7Bx125	IL84-7BSx125	1000	1/2-13	2	1-1/4	3/8
IL84-7Bx150	IL84-7BSx150	1000	1/2-13	2	1-1/2	3/8
IL84-7Bx238		1000	1/2-13	2	2-3/8	3/8
IL86-4Bx1/4	IL86-4BSx1/4	100	1/4-20	2-1/2	1/4	3/8
IL86-4Bx1/2	IL86-4BSx1/2	100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx1/2-HX-SL		100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx3/4	IL86-4BSx3/4	100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx3/4-HX-SL		100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx1	IL86-4BSx1	100	1/4-20	2-1/2	1	3/8
IL86-4Bx1-HX-SL		100	1/4-20	2-1/2	1	3/8
IL86-4Bx125	IL86-4BSx125	100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx125-HX-SL		100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx150	IL86-4BSx150	100	1/4-20	2-1/2	1-1/2	3/8
IL86-4Bx175	IL86-4BSx175	100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx175-HX-SL		100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx2	IL86-4BSx2	100	1/4-20	2-1/2	2	3/8
IL86-4Bx275	IL86-4BSx275	100	1/4-20	2-1/2	2-3/4	3/8
IL86-5Bx1/4	IL86-5BSx1/4	500	5/16-18	2-1/2	1/4	3/8
IL86-5Bx1/2	IL86-5BSx1/2	500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx1/2-HX-SL		500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx3/4	IL86-5BSx3/4	500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx3/4-HX-SL		500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx1	IL86-5BSx1	500	5/16-18	2-1/2	1	3/8
IL86-5Bx1-HX-SL		500	5/16-18	2-1/2	1	3/8
IL86-5Bx125-HX-SL		500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx125	IL86-5BSx125	500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx175	IL86-5BSx175	500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx175-HX-SL		500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx225-HX-SL		500	5/16-18	2-1/2	2-1/4	3/8
IL86-6Bx1/4	IL86-6BSx1/4	1000	3/8-16	2-1/2	1/4	3/8
IL86-6Bx1/2	IL86-6BSx1/2	1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx1/2-HX-SL		1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx3/4-HX-SL		1000	3/8-16	2-1/2	3/4	3/8
IL86-6Bx1	IL86-6BSx1	1000	3/8-16	2-1/2	1	3/8
IL86-6Bx1-HX-SL		1000	3/8-16	2-1/2	1	3/8
IL86-6Bx125	IL86-6BSx125	1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx125-HX-SL		1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx150	IL86-6BSx150	1000	3/8-16	2-1/2	1-1/2	3/8
IL86-6Bx175-HX-SL		1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx175	IL86-6BSx175	1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx238	IL86-6BSx238	1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-HX-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx275-HX-SL		1000	3/8-16	2-1/2	2-3/4	3/8
IL86-6Bx338-HX-SL		1000	3/8-16	2-1/2	3-3/8	3/8
IL86-7Bx3/4	IL86-7BSx3/4	1000	1/2-13	2-1/2	3/4	3/8
IL86-7Bx1	IL86-7BSx1	1000	1/2-13	2-1/2	1	3/8
IL86-7Bx125	IL86-7BSx125	1000	1/2-13	2-1/2	1-1/4	3/8
IL86-7Bx150	IL86-7BSx150	1000	1/2-13	2-1/2	1-1/2	3/8
IL86-7Bx238		1000	1/2-13	2-1/2	2-3/8	3/8




Many colors available as custom option.



KNOB STYLE GLIDES

The IEC Knob Style Steel and Stainless Steel Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

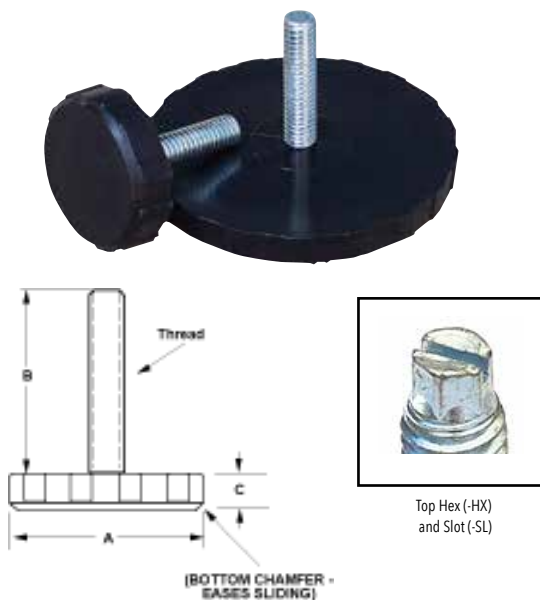

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending



Many colors available as custom option.

BLACK NYLON THREADED KNOB HUBS


P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL88-4Bx1/4	IL88-4BSx1/4	100	1/4-20	3	1/4	3/8
IL88-4Bx1/2	IL88-4BSx1/2	100	1/4-20	3	1/2	3/8
IL88-4Bx1/2-HX-SL		100	1/4-20	3	1/2	3/8
IL88-4Bx3/4	IL88-4BSx3/4	100	1/4-20	3	3/4	3/8
IL88-4Bx3/4-HX-SL		100	1/4-20	3	3/4	3/8
IL88-4Bx1	IL88-4BSx1	100	1/4-20	3	1	3/8
IL88-4Bx1-HX-SL		100	1/4-20	3	1	3/8
IL88-4Bx125	IL88-4BSx125	100	1/4-20	3	1-1/4	3/8
IL88-4Bx125-HX-SL		100	1/4-20	3	1-1/4	3/8
IL88-4Bx150	IL88-4BSx150	100	1/4-20	3	1-1/2	3/8
IL88-4Bx175	IL88-4BSx175	100	1/4-20	3	1-3/4	3/8
IL88-4Bx175-HX-SL		100	1/4-20	3	1-3/4	3/8
IL88-4Bx2	IL88-4BSx2	100	1/4-20	3	2	3/8
IL88-4Bx275	IL88-4BSx275	100	1/4-20	3	2-3/4	3/8
IL88-5Bx1/4	IL88-5BSx1/4	500	5/16-18	3	1/4	3/8
IL88-5Bx1/2	IL88-5BSx1/2	500	5/16-18	3	1/2	3/8
IL88-5Bx1/2-HX-SL		500	5/16-18	3	1/2	3/8
IL88-5Bx3/4	IL88-5BSx3/4	500	5/16-18	3	3/4	3/8
IL88-5Bx3/4-HX-SL		500	5/16-18	3	3/4	3/8
IL88-5Bx1	IL88-5BSx1	500	5/16-18	3	1	3/8
IL88-5Bx1-HX-SL		500	5/16-18	3	1	3/8
IL88-5Bx125-HX-SL		500	5/16-18	3	1-1/4	3/8
IL88-5Bx125	IL88-5BSx125	500	5/16-18	3	1-1/4	3/8
IL88-5Bx175	IL88-5BSx175	500	5/16-18	3	1-3/4	3/8
IL88-5Bx175-HX-SL		500	5/16-18	3	1-3/4	3/8
IL88-5Bx225-HX-SL		500	5/16-18	3	2-1/4	3/8
IL88-6Bx1/4	IL88-6BSx1/4	1000	3/8-16	3	1/4	3/8
IL88-6Bx1/2	IL88-6BSx1/2	1000	3/8-16	3	1/2	3/8
IL88-6Bx1/2-HX-SL		1000	3/8-16	3	1/2	3/8
IL88-6Bx3/4-HX-SL		1000	3/8-16	3	3/4	3/8
IL88-6Bx1	IL88-6BSx1	1000	3/8-16	3	1	3/8
IL88-6Bx1-HX-SL		1000	3/8-16	3	1	3/8
IL88-6Bx125	IL88-6BSx125	1000	3/8-16	3	1-1/4	3/8
IL88-6Bx125-HX-SL		1000	3/8-16	3	1-1/4	3/8
IL88-6Bx150	IL88-6BSx150	1000	3/8-16	3	1-1/2	3/8
IL88-6Bx175-HX-SL		1000	3/8-16	3	1-3/4	3/8
IL88-6Bx175	IL88-6BSx175	1000	3/8-16	3	1-3/4	3/8
IL88-6Bx238	IL88-6BSx238	1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-HX-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx275-HX-SL		1000	3/8-16	3	2-3/4	3/8
IL88-6Bx338-HX-SL		1000	3/8-16	3	3-3/8	3/8
IL88-7Bx3/4	IL88-7BSx3/4	1000	1/2-13	3	3/4	3/8
IL88-7Bx1	IL88-7BSx1	1000	1/2-13	3	1	3/8
IL88-7Bx125	IL88-7BSx125	1000	1/2-13	3	1-1/4	3/8
IL88-7Bx150	IL88-7BSx150	1000	1/2-13	3	1-1/2	3/8
IL88-7Bx238		1000	1/2-13	3	2-3/8	3/8



KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel and Stainless Steel Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.


 Top Hex (-HX)
and Slot (-SL)


Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10

36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**QUOTE REQUEST****Your Contact Information**

NAME:	TITLE:
COMPANY:	E-MAIL:
STREET ADDRESS OR POB:	CITY:
STATE:	ZIP CODE:
PHONE:	FAX:

Standard Product Request

ITEM #	IEC PART NUMBER	DESCRIPTION	QUANTITY
1			
Comments:			
2			
Comments:			
3			
Comments:			
4			
Comments:			

CUSTOM or MODIFIED Product Request

SIMILAR TO IEC PN#: _____

BASE		STUD	
DIAMETER:		LENGTH:	
MATERIAL:		THREAD:	
SWIVEL:		MATERIAL:	
FINISH: ☐ Gold Iridite ☐ Black Chromate			
☐ Clear Chromate			

OPTIONAL FEATURES

☐ TOP-A-JUST:	☐ INTERNAL BROACH:
☐ NON-SKID PAD:	☐ HEX HEAD:
☐ LAG HOLES:	☐ SQUARE HEAD:
☐ HEAT TREATED STUD:	☐ TOP SLOT:
QUANTITY REQUESTED:	EST ANNUAL USAGE:
Comments / Special Instructions:	

PLEASE FAX THIS FORM TO: 562-498-2275

Warranty & Disclaimer

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

© Copyright 2015. International Equipment Components, Inc. All rights reserved.

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

HEAVY-DUTY LEVELERS



ANY THUNDER ... ANY LENGTH ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS



ANY THUNDER ... ANY LENGTH ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

LIGHT-DUTY LEVELERS



ANY THUNDER ... ANY LENGTH ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

METRIC LEVELERS



ANY THUNDER ... ANY LENGTH ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.

2201 E. Willow Street, D-104,

Signal Hill, CA 90755

Email: sales@iec-corp.com

Phone: 562-597-4533

Fax: 562-498-2275

Web: www.iec-corp.com

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

KNOB & HANDLE




**CLAMP
ADJUST
STABILIZE
FASTEN**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

CAP & PLUG PRODUCTS

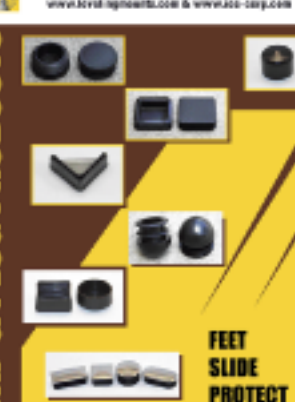

**FEET
SLIDE
PROTECT
FINISH**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

SURFACE PROTECTION
SLIDERS, GRIPPERS & FEET



**CUSHION
QUIET
SLIDE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

LEG & CASTER PRODUCTS



**LEVEL
EXTEND
SUPPORT
ROLL**

Ph. 562.597.4533