



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL SOCKET

NYLON SWIVEL METRIC SOCKET STYLE LEVELERS — with Rubber Pad



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/8" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

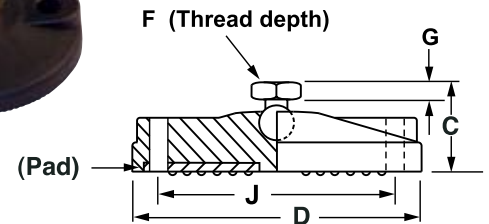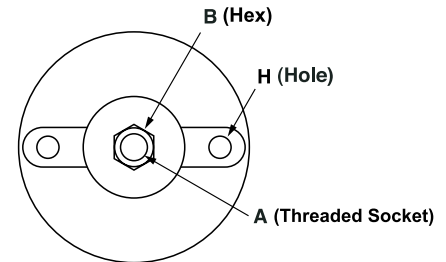

Metric Threads : 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL91-M6G-P	IL91-M6S-P	100	M6X1	1/2	1	1 1/8	3/8	3/16	-	-
IL91-M8G-P	IL91-M8S-P	500	M8X1.25	1/2	1	1 1/8	3/8	3/16	-	-
IL91-M10G-P	IL91-M10S-P	2000	M10X1.50	1/2	1	1 1/8	3/8	3/16	-	-
IL91-M12G-P	IL91-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/8	3/8	1/2	-	-
IL91-M16G-P	IL91-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/8	1/2	5/8	-	-
IL91-M20G-P	IL91-M20S-P	2000	M20X2.50	1	1-5/8	1 1/8	5/8	11/16	-	-
IL91-M24G-P	IL91-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/8	11/16	3/4	-	-
IL93-M6G-P	IL93-M6S-P	100	M6X1	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M8G-P	IL93-M8S-P	500	M8X1.25	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M10G-P	IL93-M10S-P	2000	M10X1.50	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M12G-P	IL93-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-M16G-P	IL93-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-M20G-P	IL93-M20S-P	2000	M20X2.50	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-M24G-P	IL93-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-M6G-P	IL95-M6S-P	100	M6X1	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M8G-P	IL95-M8S-P	500	M8X1.25	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M10G-P	IL95-M10S-P	2500	M10X1.50	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M12G-P	IL95-M12S-P	2500	M12X1.75	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-M16G-P	IL95-M16S-P	2500	M16X2.00	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-M20G-P	IL95-M20S-P	2500	M20X2.50	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-M24G-P	IL95-M24S-P	2500	M24X3.00	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-M6G-H-P	IL97-M6S-H-P	100	M6X1	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M8G-H-P	IL97-M8S-H-P	500	M8X1.25	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M10G-H-P	IL97-M10S-H-P	3000	M10X1.50	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M12G-H-P	IL97-M12S-H-P	3000	M12X1.75	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-M16G-H-P	IL97-M16S-H-P	3000	M16X2.00	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-M20G-H-P	IL97-M20S-H-P	3000	M20X2.50	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-M24G-H-P	IL97-M24S-H-P	3000	M24X3.00	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2

"-H" denotes two lag holes in base Note: "F" column values represent thread depth
To order without rubber pad, remove "-P." To order without lag holes, remove "-H."



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL SOCKET

NYLON SWIVEL METRIC SOCKET STYLE LEVELERS — with Rubber Pad



The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler* with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/8" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

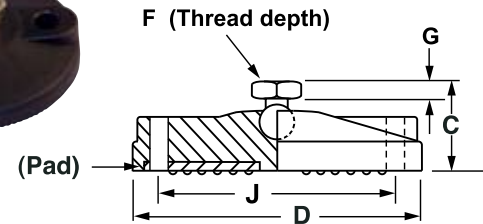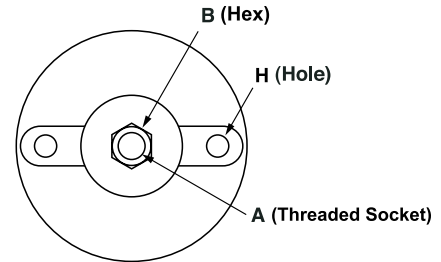

Metric Threads : 4" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL99-M6G-H-P	IL99-M6S-H-P	100	M6X1	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M8G-H-P	IL99-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M10G-H-P	IL99-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M12G-H-P	IL99-M12S-H-P	3000	M12X1.75	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-M16G-H-P	IL99-M16S-H-P	3000	M16X2.00	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-M20G-H-P	IL99-M20S-H-P	3000	M20X2.50	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-M24G-H-P	IL99-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-M6G-H-P	IL99A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M8G-H-P	IL99A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M10G-H-P	IL99A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M12G-H-P	IL99A-M12S-H-P	3000	M12X1.75	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-M16G-H-P	IL99A-M16S-H-P	3000	M16X2.00	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-M20G-H-P	IL99A-M20S-H-P	3000	M20X2.50	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-M24G-H-P	IL99A-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-M6G-H-P	IL99B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M8G-H-P	IL99B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M10G-H-P	IL99B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M12G-H-P	IL99B-M12S-H-P	3000	M12X1.75	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-M16G-H-P	IL99B-M16S-H-P	3000	M16X2.00	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-M20G-H-P	IL99B-M20S-H-P	3000	M20X2.50	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-M24G-H-P	IL99B-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL99C-M6G-H-P	IL99C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M8G-H-P	IL99C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M10G-H-P	IL99C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M12G-H-P	IL99C-M12S-H-P	3000	M12X1.75	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL99C-M16G-H-P	IL99C-M16S-H-P	3000	M16X2.00	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL99C-M20G-H-P	IL99C-M20S-H-P	3000	M20X2.50	1	1-7/8	10	5/8	11/16	.51	8.9
IL99C-M24G-H-P	IL99C-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"-H" denotes two lag holes in base Note: "F" column values represent thread depth
To order without rubber pad, remove "-P." To order without lag holes, remove "-H."



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 1" & 2" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad



The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

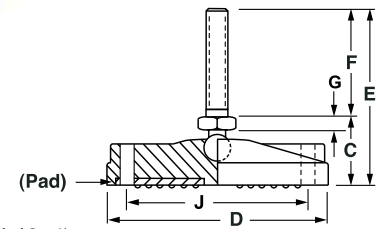

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—2" Stud and Rubber Pad											
IL90-M6Gx1-P	IL90-M6Sx1-P	100	M6X1	1/2	1	1-1/8	2	1	3/16	-	-
IL90-M8Gx1-P	IL90-M8Sx1-P	500	M8X1.25	1/2	1	1-1/8	2	1	3/16	-	-
IL90-M6G-P	IL90-M6S-P	100	M6X1	1/2	1	1-1/8	3	2	3/16	-	-
IL90-M8G-P	IL90-M8S-P	500	M8X1.25	1/2	1	1-1/8	3	2	3/16	-	-
IL90-M10G-P	IL90-M10S-P	2000	M10X1.50	1/2	1	1-1/8	3	2	3/16	-	-
IL90-M12G-P	IL90-M12S-P	2000	M12X1.75	1/2	1	1-1/8	3	2	3/16	-	-
IL90-M16G-P	IL90-M16S-P	2000	M16X2.00	5/8	1	1-1/8	3	2	3/16	-	-
IL90-M20G-P	IL90-M20S-P	2000	M20X2.50	3/4	1	1-1/8	3	2	3/16	-	-
IL90-M24G-P	IL90-M24S-P	2000	M24X3.00	1	1-1/4	1-1/8	3-1/4	2	7/16	-	-
IL92-M6Gx1-P	IL92-M6Sx1-P	100	M6X1	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M8Gx1-P	IL92-M8Sx1-P	500	M8X1.25	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M6G-P	IL92-M6S-P	100	M6X1	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M8G-P	IL92-M8S-P	500	M8X1.25	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M10G-P	IL92-M10S-P	2000	M10X1.50	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M12G-P	IL92-M12S-P	2000	M12X1.75	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M16G-P	IL92-M16S-P	2000	M16X2.00	5/8	1	1-1/2	3	2	3/16	-	-
IL92-M20G-P	IL92-M20S-P	2000	M20X2.50	3/4	1	1-1/2	3	2	3/16	-	-
IL92-M24G-P	IL92-M24S-P	2000	M24X3.00	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-M6Gx1-P	IL94-M6Sx1-P	100	M6X1	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M8Gx1-P	IL94-M8Sx1-P	500	M8X1.25	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M6G-P	IL94-M6S-P	100	M6X1	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M8G-P	IL94-M8S-P	500	M8X1.25	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M10G-P	IL94-M10S-P	2500	M10X1.50	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M12G-P	IL94-M12S-P	2500	M12X1.75	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M16G-P	IL94-M16S-P	2500	M16X2.00	5/8	1	2-3/8	3	2	3/16	-	-
IL94-M20G-P	IL94-M20S-P	2500	M20X2.50	3/4	1	2-3/8	3	2	3/16	-	-
IL94-M24G-P	IL94-M24S-P	2500	M24X3.00	1	1-1/4	2-3/8	3-1/4	2	7/16	-	-
IL96-M6Gx1-H-P	IL96-M6Sx1-H-P	100	M6X1	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M8Gx1-H-P	IL96-M8Sx1-H-P	500	M8X1.25	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M6G-H-P	IL96-M6S-H-P	100	M6X1	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M8G-H-P	IL96-M8S-H-P	500	M8X1.25	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M10G-H-P	IL96-M10S-H-P	3000	M10X1.50	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M12G-H-P	IL96-M12S-H-P	3000	M12X1.75	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M16G-H-P	IL96-M16S-H-P	3000	M16X2.00	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-M20G-H-P	IL96-M20S-H-P	3000	M20X2.50	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-M24G-H-P	IL96-M24S-H-P	3000	M24X3.00	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 1" & 2" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad


The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

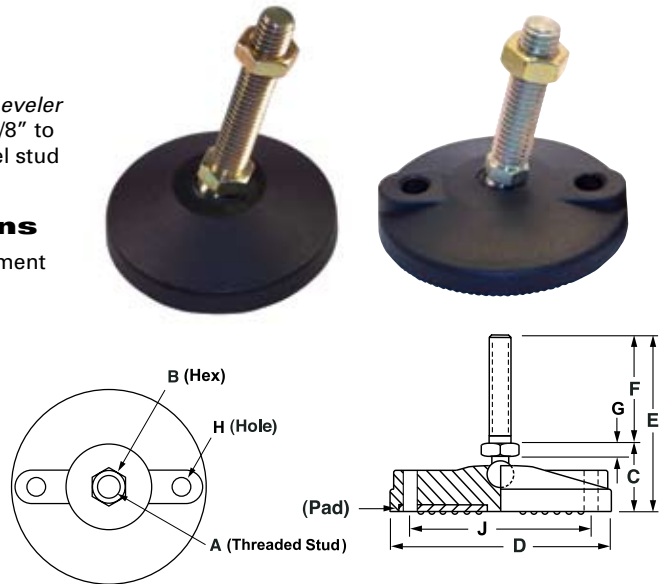

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—2" Stud and Rubber Pad											
IL98-M6Gx1-H-P	IL98-M6Sx1-H-P	100	M6X1	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M8Gx1-H-P	IL98-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M6G-H-P	IL98-M6S-H-P	100	M6X1	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M8G-H-P	IL98-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M10G-H-P	IL98-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M12G-H-P	IL98-M12S-H-P	3000	M12X1.75	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M16G-H-P	IL98-M16S-H-P	3000	M16X2.00	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M20G-H-P	IL98-M20S-H-P	3000	M20X2.50	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M24G-H-P	IL98-M24S-H-P	3000	M24X3.00	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98A-M6Gx1-H-P	IL98A-M6Sx1-H-P	100	M6X1	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M8Gx1-H-P	IL98A-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M6G-H-P	IL98A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M8G-H-P	IL98A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M10G-H-P	IL98A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M12G-H-P	IL98A-M12S-H-P	3000	M12X1.75	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M16G-H-P	IL98A-M16S-H-P	3000	M16X2.00	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M20G-H-P	IL98A-M20S-H-P	3000	M20X2.50	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M24G-H-P	IL98A-M24S-H-P	3000	M24X3.00	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-M6Gx1-H-P	IL98B-M6Sx1-H-P	100	M6X1	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M8Gx1-H-P	IL98B-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M6G-H-P	IL98B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M8G-H-P	IL98B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M10G-H-P	IL98B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M12G-H-P	IL98B-M12S-H-P	3000	M12X1.75	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M16G-H-P	IL98B-M16S-H-P	3000	M16X2.00	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M20G-H-P	IL98B-M20S-H-P	3000	M20X2.50	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M24G-H-P	IL98B-M24S-H-P	3000	M24X3.00	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-M6Gx1-H-P	IL98C-M6Sx1-H-P	100	M6X1	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M8Gx1-H-P	IL98C-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M6G-H-P	IL98C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M8G-H-P	IL98C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M10G-H-P	IL98C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M12G-H-P	IL98C-M12S-H-P	3000	M12X1.75	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M16G-H-P	IL98C-M16S-H-P	3000	M16X2.00	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M20G-H-P	IL98C-M20S-H-P	3000	M20X2.50	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M24G-H-P	IL98C-M24S-H-P	3000	M24X3.00	1	1-1/2	10	3-1/2	2	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

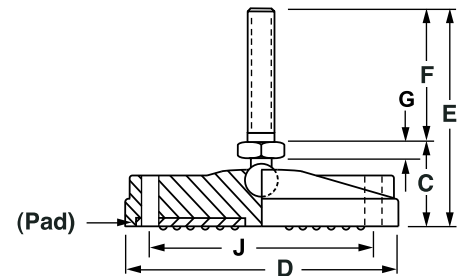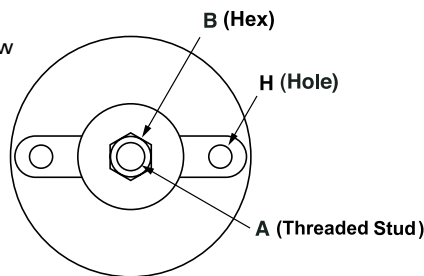

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—3" Stud and Rubber Pad											
IL90-M6GX3-P	IL90-M6SX3-P	100	M6X1	1/2	1	1 1/8	4	3	3/16	-	-
IL90-M8GX3-P	IL90-M8SX3-P	500	M8X1.25	1/2	1	1 1/8	4	3	3/16	-	-
IL90-M10GX3-P	IL90-M10SX3-P	2000	M10X1.50	1/2	1	1 1/8	4	3	3/16	-	-
IL90-M12GX3-P	IL90-M12SX3-P	2000	M12X1.75	1/2	1	1 1/8	4	3	3/16	-	-
IL90-M16GX3-P	IL90-M16SX3-P	2000	M16X2.00	5/8	1	1 1/8	4	3	3/16	-	-
IL90-M20GX3-P	IL90-M20SX3-P	2000	M20X2.50	3/4	1	1 1/8	4	3	3/16	-	-
IL90-M24GX3-P	IL90-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/8	4 1/4	3	7/16	-	-
IL92-M6GX3-P	IL92-M6SX3-P	100	M6X1	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M8GX3-P	IL92-M8SX3-P	500	M8X1.25	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M10GX3-P	IL92-M10SX3-P	2000	M10X1.50	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M12GX3-P	IL92-M12SX3-P	2000	M12X1.75	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M16GX3-P	IL92-M16SX3-P	2000	M16X2.00	5/8	1	1 1/2	4	3	3/16	-	-
IL92-M20GX3-P	IL92-M20SX3-P	2000	M20X2.50	3/4	1	1 1/2	4	3	3/16	-	-
IL92-M24GX3-P	IL92-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-M6GX3-P	IL94-M6SX3-P	100	M6X1	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M8GX3-P	IL94-M8SX3-P	500	M8X1.25	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M10GX3-P	IL94-M10SX3-P	2500	M10X1.50	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M12GX3-P	IL94-M12SX3-P	2500	M12X1.75	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M16GX3-P	IL94-M16SX3-P	2500	M16X2.00	5/8	1	2 3/8	4	3	3/16	-	-
IL94-M20GX3-P	IL94-M20SX3-P	2500	M20X2.50	3/4	1	2 3/8	4	3	3/16	-	-
IL94-M24GX3-P	IL94-M24SX3-P	2500	M24X3.00	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-M6GX3-H-P	IL96-M6SX3-H-P	100	M6X1	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M8GX3-H-P	IL96-M8SX3-H-P	500	M8X1.25	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M10GX3-H-P	IL96-M10SX3-H-P	3000	M10X1.50	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M12GX3-H-P	IL96-M12SX3-H-P	3000	M12X1.75	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M16GX3-H-P	IL96-M16SX3-H-P	3000	M16X2.00	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-M20GX3-H-P	IL96-M20SX3-H-P	3000	M20X2.50	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-M24GX3-H-P	IL96-M24SX3-H-P	3000	M24X3.00	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2

To order optional top broached hex, "allen drive," add "-BR"

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

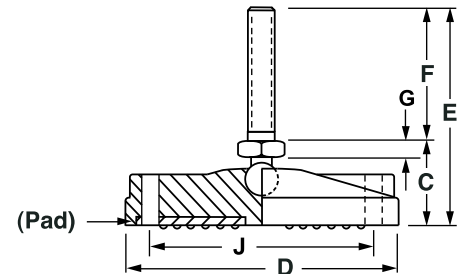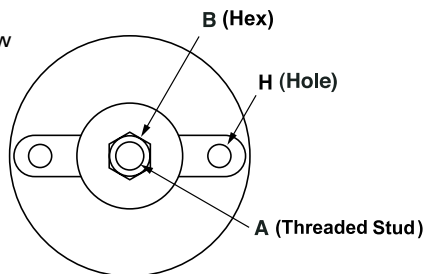

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—3" Stud and Rubber Pad											
IL98-M6GX3-H-P	IL98-M6SX3-H-P	100	M6X1	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M8GX3-H-P	IL98-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M10GX3-H-P	IL98-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M12GX3-H-P	IL98-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M16GX3-H-P	IL98-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M20GX3-H-P	IL98-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M24GX3-H-P	IL98-M24SX3-H-P	3000	M24X3.00	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98A-M6GX3-H-P	IL98A-M6SX3-H-P	100	M6X1	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M8GX3-H-P	IL98A-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M10GX3-H-P	IL98A-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M12GX3-H-P	IL98A-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M16GX3-H-P	IL98A-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M20GX3-H-P	IL98A-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M24GX3-H-P	IL98A-M24SX3-H-P	3000	M24X3.00	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-M6GX3-H-P	IL98B-M6SX3-H-P	100	M6X1	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M8GX3-H-P	IL98B-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M10GX3-H-P	IL98B-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M12GX3-H-P	IL98B-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M16GX3-H-P	IL98B-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M20GX3-H-P	IL98B-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M24GX3-H-P	IL98B-M24SX3-H-P	3000	M24X3.00	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-M6GX3-H-P	IL98C-M6SX3-H-P	100	M6X1	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M8GX3-H-P	IL98C-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M10GX3-H-P	IL98C-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M12GX3-H-P	IL98C-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M16GX3-H-P	IL98C-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M20GX3-H-P	IL98C-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M24GX3-H-P	IL98C-M24SX3-H-P	3000	M24X3.00	1	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

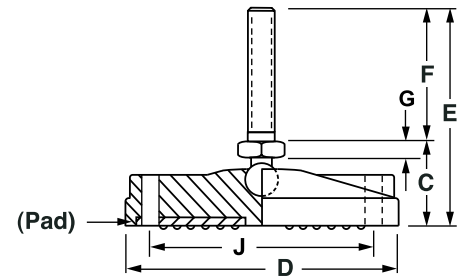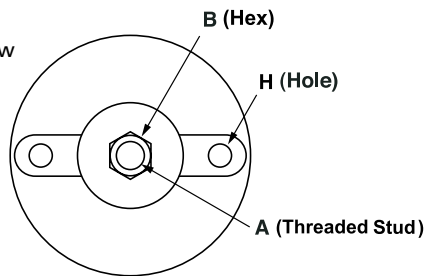

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—4" Stud and Rubber Pad											
IL90-M8GX4-P	IL90-M8SX4-P	500	M8X1.25	1/2	1	1 1/8	5	4	3/16	-	-
IL90-M10GX4-P	IL90-M10SX4-P	2000	M10X1.50	1/2	1	1 1/8	5	4	3/16	-	-
IL90-M12GX4-P	IL90-M12SX4-P	2000	M12X1.75	5/8	1	1 1/8	5	4	3/16	-	-
IL90-M16GX4-P	IL90-M16SX4-P	2000	M16X2.00	3/4	1	1 1/8	5	4	3/16	-	-
IL90-M20GX4-P	IL90-M20SX4-P	2000	M20X2.50	3/4	1	1 1/8	5	4	3/16	-	-
IL90-M24GX4-P	IL90-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/8	5 1/4	4	7/16	-	-
IL92-M8GX4-P	IL92-M8SX4-P	500	M8X1.25	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M10GX4-P	IL92-M10SX4-P	2000	M10X1.50	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M12GX4-P	IL92-M12SX4-P	2000	M12X1.75	5/8	1	1 1/2	5	4	3/16	-	-
IL92-M16GX4-P	IL92-M16SX4-P	2000	M16X2.00	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M20GX4-P	IL92-M20SX4-P	2000	M20X2.50	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M24GX4-P	IL92-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-M8GX4-P	IL94-M8SX4-P	500	M8X1.25	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M10GX4-P	IL94-M10SX4-P	2500	M10X1.50	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M12GX4-P	IL94-M12SX4-P	2500	M12X1.75	5/8	1	2 3/8	5	4	3/16	-	-
IL94-M16GX4-P	IL94-M16SX4-P	2500	M16X2.00	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M20GX4-P	IL94-M20SX4-P	2500	M20X2.50	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M24GX4-P	IL94-M24SX4-P	2500	M24X3.00	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-M8GX4-H-P	IL96-M8SX4-H-P	500	M8X1.25	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M10GX4-H-P	IL96-M10SX4-H-P	3000	M10X1.50	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M12GX4-H-P	IL96-M12SX4-H-P	3000	M12X1.75	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-M16GX4-H-P	IL96-M16SX4-H-P	3000	M16X2.00	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M20GX4-H-P	IL96-M20SX4-H-P	3000	M20X2.50	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M24GX4-H-P	IL96-M24SX4-H-P	3000	M24X3.00	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

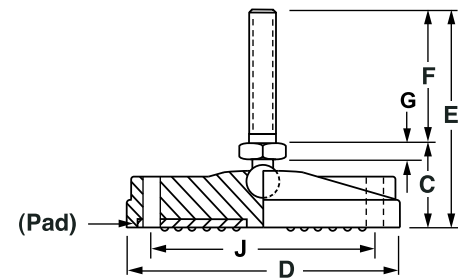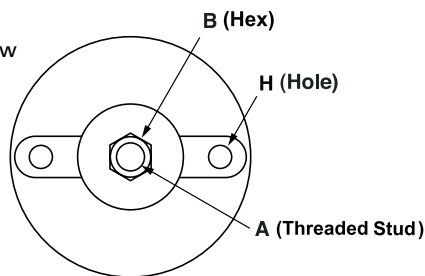

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—4" Stud and Rubber Pad											
IL98-M8GX4-H-P	IL98-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M10GX4-H-P	IL98-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M12GX4-H-P	IL98-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M16GX4-H-P	IL98-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M20GX4-H-P	IL98-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M24GX4-H-P	IL98-M24SX4-H-P	3000	M24X3.00	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98A-M8GX4-H-P	IL98A-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M10GX4-H-P	IL98A-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M12GX4-H-P	IL98A-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M16GX4-H-P	IL98A-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M20GX4-H-P	IL98A-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M24GX4-H-P	IL98A-M24SX4-H-P	3000	M24X3.00	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-M8GX4-H-P	IL98B-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M10GX4-H-P	IL98B-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M12GX4-H-P	IL98B-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M16GX4-H-P	IL98B-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M20GX4-H-P	IL98B-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M24GX4-H-P	IL98B-M24SX4-H-P	3000	M24X3.00	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-M8GX4-H-P	IL98C-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M10GX4-H-P	IL98C-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M12GX4-H-P	IL98C-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M16GX4-H-P	IL98C-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M20GX4-H-P	IL98C-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M24GX4-H-P	IL98C-M24SX4-H-P	3000	M24X3.00	1	1 1/2	10	5 1/2	4	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

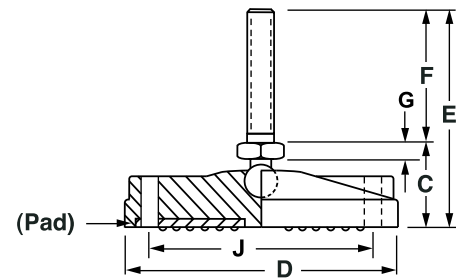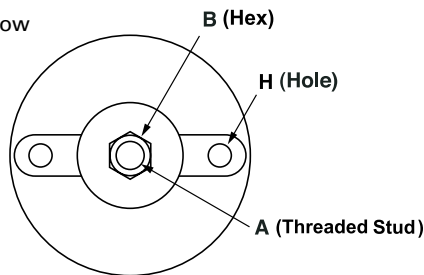

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—5" Stud and Rubber Pad											
IL90-M10GX5-P	IL90-M10SX5-P	2000	M10X1.50	1/2	1	1 1/8	6	5	3/16	-	-
IL90-M12GX5-P	IL90-M12SX5-P	2000	M12X1.75	1/2	1	1 1/8	6	5	3/16	-	-
IL90-M16GX5-P	IL90-M16SX5-P	2000	M16X2.00	5/8	1	1 1/8	6	5	3/16	-	-
IL90-M20GX5-P	IL90-M20SX5-P	2000	M20X2.50	3/4	1	1 1/8	6	5	3/16	-	-
IL90-M24GX5-P	IL90-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/8	6 1/4	5	7/16	-	-
IL92-M10GX5-P	IL92-M10SX5-P	2000	M10X1.50	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M12GX5-P	IL92-M12SX5-P	2000	M12X1.75	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M16GX5-P	IL92-M16SX5-P	2000	M16X2.00	5/8	1	1 1/2	6	5	3/16	-	-
IL92-M20GX5-P	IL92-M20SX5-P	2000	M20X2.50	3/4	1	1 1/2	6	5	3/16	-	-
IL92-M24GX5-P	IL92-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-M10GX5-P	IL94-M10SX5-P	2500	M10X1.50	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M12GX5-P	IL94-M12SX5-P	2500	M12X1.75	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M16GX5-P	IL94-M16SX5-P	2500	M16X2.00	5/8	1	2 3/8	6	5	3/16	-	-
IL94-M20GX5-P	IL94-M20SX5-P	2500	M20X2.50	3/4	1	2 3/8	6	5	3/16	-	-
IL94-M24GX5-P	IL94-M24SX5-P	2500	M24X3.00	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-M10GX5-H-P	IL96-M10SX5-H-P	3000	M10X1.50	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M12GX5-H-P	IL96-M12SX5-H-P	3000	M12X1.75	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M16GX5-H-P	IL96-M16SX5-H-P	3000	M16X2.00	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-M20GX5-H-P	IL96-M20SX5-H-P	3000	M20X2.50	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-M24GX5-H-P	IL96-M24SX5-H-P	3000	M24X3.00	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

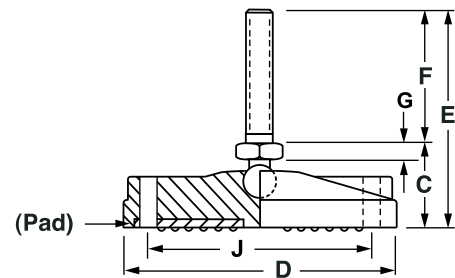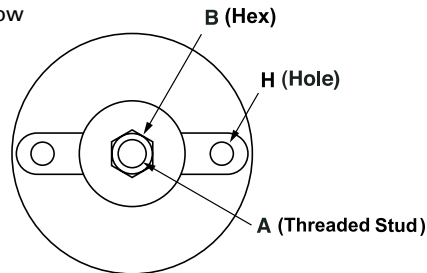

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—5" Stud and Rubber Pad											
IL98-M10GX5-H-P	IL98-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M12GX5-H-P	IL98-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M16GX5-H-P	IL98-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M20GX5-H-P	IL98-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M24GX5-H-P	IL98-M24SX5-H-P	3000	M24X3.00	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98A-M10GX5-H-P	IL98A-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M12GX5-H-P	IL98A-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M16GX5-H-P	IL98A-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M20GX5-H-P	IL98A-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M24GX5-H-P	IL98A-M24SX5-H-P	3000	M24X3.00	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-M10GX5-H-P	IL98B-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M12GX5-H-P	IL98B-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M16GX5-H-P	IL98B-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M20GX5-H-P	IL98B-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M24GX5-H-P	IL98B-M24SX5-H-P	3000	M24X3.00	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-M10GX5-H-P	IL98C-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M12GX5-H-P	IL98C-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M16GX5-H-P	IL98C-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M20GX5-H-P	IL98C-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M24GX5-H-P	IL98C-M24SX5-H-P	3000	M24X3.00	1	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

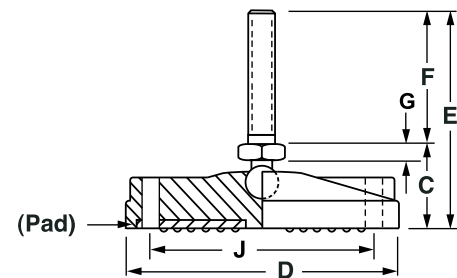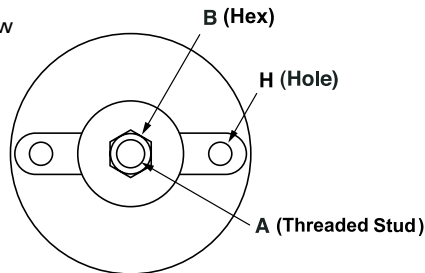

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—6" Stud and Rubber Pad											
IL90-M10GX6-P	IL90-M10SX6-P	2000	M10X1.50	1/2	1	1 1/8	7	6	3/16	-	-
IL90-M12GX6-P	IL90-M12SX6-P	2000	M12X1.75	1/2	1	1 1/8	7	6	3/16	-	-
IL90-M16GX6-P	IL90-M16SX6-P	2000	M16X2.00	5/8	1	1 1/8	7	6	3/16	-	-
IL90-M20GX6-P	IL90-M20SX6-P	2000	M20X2.50	3/4	1	1 1/8	7	6	3/16	-	-
IL90-M24GX6-P	IL90-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/8	7 1/4	6	7/16	-	-
IL92-M10GX6-P	IL92-M10SX6-P	2000	M10X1.50	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M12GX6-P	IL92-M12SX6-P	2000	M12X1.75	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M16GX6-P	IL92-M16SX6-P	2000	M16X2.00	5/8	1	1 1/2	7	6	3/16	-	-
IL92-M20GX6-P	IL92-M20SX6-P	2000	M20X2.50	3/4	1	1 1/2	7	6	3/16	-	-
IL92-M24GX6-P	IL92-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-M10GX6-P	IL94-M10SX6-P	2500	M10X1.50	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M12GX6-P	IL94-M12SX6-P	2500	M12X1.75	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M16GX6-P	IL94-M16SX6-P	2500	M16X2.00	5/8	1	2 3/8	7	6	3/16	-	-
IL94-M20GX6-P	IL94-M20SX6-P	2500	M20X2.50	3/4	1	2 3/8	7	6	3/16	-	-
IL94-M24GX6-P	IL94-M24SX6-P	2500	M24X3.00	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-M10GX6-H-P	IL96-M10SX6-H-P	3000	M10X1.50	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M12GX6-H-P	IL96-M12SX6-H-P	3000	M12X1.75	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M16GX6-H-P	IL96-M16SX6-H-P	3000	M16X2.00	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-M20GX6-H-P	IL96-M20SX6-H-P	3000	M20X2.50	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M24GX6-H-P	IL96-M24SX6-H-P	3000	M24X3.00	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

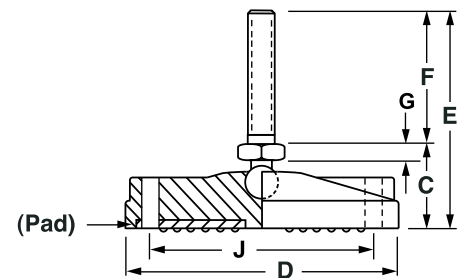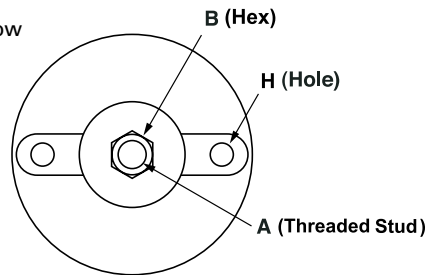

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—6" Stud and Rubber Pad											
IL98-M10GX6-H-P	IL98-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M12GX6-H-P	IL98-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M16GX6-H-P	IL98-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M20GX6-H-P	IL98-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M24GX6-H-P	IL98-M24SX6-H-P	3000	M24X3.00	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98A-M10GX6-H-P	IL98A-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M12GX6-H-P	IL98A-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M16GX6-H-P	IL98A-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M20GX6-H-P	IL98A-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M24GX6-H-P	IL98A-M24SX6-H-P	3000	M24X3.00	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-M10GX6-H-P	IL98B-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M12GX6-H-P	IL98B-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M16GX6-H-P	IL98B-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M20GX6-H-P	IL98B-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M24GX6-H-P	IL98B-M24SX6-H-P	3000	M24X3.00	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-M10GX6-H-P	IL98C-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M12GX6-H-P	IL98C-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M16GX6-H-P	IL98C-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M20GX6-H-P	IL98C-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M24GX6-H-P	IL98C-M24SX6-H-P	3000	M24X3.00	1	1 1/2	10	7 1/2	6	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

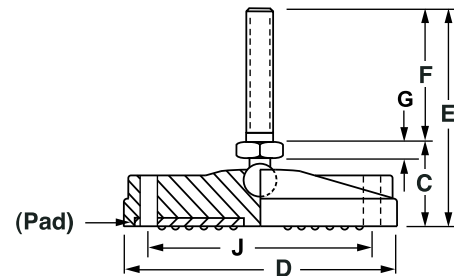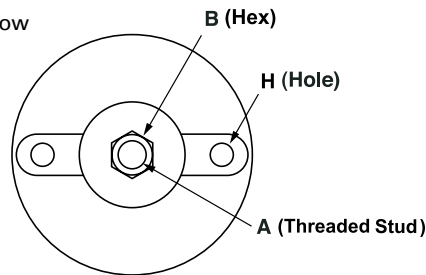

Metric Threads: 1-1/8" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL90-M12GX8-P	IL90-M12SX8-P	2000	M12X1.75	1/2	1	1 1/8	9	8	3/16	-	-
IL90-M16GX8-P	IL90-M16SX8-P	2000	M16X2.00	5/8	1	1 1/8	9	8	3/16	-	-
IL90-M20GX8-P	IL90-M20SX8-P	2000	M20X2.50	3/4	1	1 1/8	9	8	3/16	-	-
IL90-M24GX8-P	IL90-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/8	9 1/4	8	7/16	-	-
IL92-M12GX8-P	IL92-M12SX8-P	2000	M12X1.75	1/2	1	1 1/2	9	8	3/16	-	-
IL92-M16GX8-P	IL92-M16SX8-P	2000	M16X2.00	5/8	1	1 1/2	9	8	3/16	-	-
IL92-M20GX8-P	IL92-M20SX8-P	2000	M20X2.50	3/4	1	1 1/2	9	8	3/16	-	-
IL92-M24GX8-P	IL92-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-M12GX8-P	IL94-M12SX8-P	2500	M12X1.75	1/2	1	2 3/8	9	8	3/16	-	-
IL94-M16GX8-P	IL94-M16SX8-P	2500	M16X2.00	5/8	1	2 3/8	9	8	3/16	-	-
IL94-M20GX8-P	IL94-M20SX8-P	2500	M20X2.50	3/4	1	2 3/8	9	8	3/16	-	-
IL94-M24GX8-P	IL94-M24SX8-P	2500	M24X3.00	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-M12GX8-H-P	IL96-M12SX8-H-P	3000	M12X1.75	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-M16GX8-H-P	IL96-M16SX8-H-P	3000	M16X2.00	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-M20GX8-H-P	IL96-M20SX8-H-P	3000	M20X2.50	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-M24GX8-H-P	IL96-M24SX8-H-P	3000	M24X3.00	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS — with Rubber Pad

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1-1/8" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

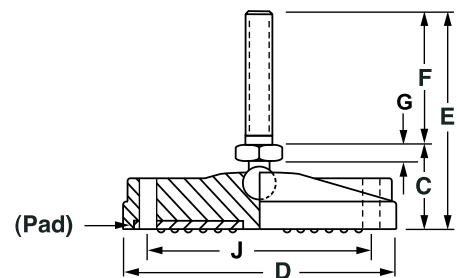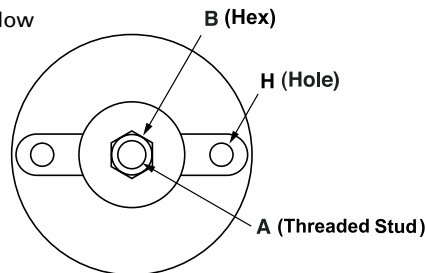

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL98-M12GX8-H-P	IL98-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M16GX8-H-P	IL98-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M20GX8-H-P	IL98-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M24GX8-H-P	IL98-M24SX8-H-P	3000	M24X3.00	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98A-M12GX8-H-P	IL98A-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M16GX8-H-P	IL98A-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M20GX8-H-P	IL98A-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M24GX8-H-P	IL98A-M24SX8-H-P	3000	M24X3.00	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-M12GX8-H-P	IL98B-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M16GX8-H-P	IL98B-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M20GX8-H-P	IL98B-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M24GX8-H-P	IL98B-M24SX8-H-P	3000	M24X3.00	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-M12GX8-H-P	IL98C-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M16GX8-H-P	IL98C-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M20GX8-H-P	IL98C-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M24GX8-H-P	IL98C-M24SX8-H-P	3000	M24X3.00	1	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC LP SOCKET

LOW PROFILE METRIC POLY SWIVEL SOCKET LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Socket Leveler* is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: M12, M16, M20, M24

Nut Height: "G" = 3/16"
for Threads: M6, M8, M10

LOW PROFILE METRIC POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-M6G	IL51-M6S	100	M6X1	1/2	5/8	1	3/8	3/16
IL51-M8G	IL51-M8S	500	M8X1.25	1/2	5/8	1	3/8	3/16
IL51-M10G	IL51-M10S	1000	M10X1.50	1/2	5/8	1	3/8	3/16
IL51-M12G	IL51-M12S	2000	M12X1.75	5/8	15/16	1	3/8	1/2
IL51-M16G	IL51-M16S	3000	M16X2.00	3/4	1-1/8	1	1/2	5/8
IL51-M20G	IL51-M20S	3000	M20X2.50	1	1-3/16	1	9/16	11/16
IL51-M24G	IL51-M24S	3000	M24X3.00	1-1/4	1-1/4	1	5/8	3/4
IL53-M6G	IL53-M6S	100	M6X1	1/2	5/8	1 1/2	3/8	3/16
IL53-M8G	IL53-M8S	500	M8X1.25	1/2	5/8	1 1/2	3/8	3/16
IL53-M10G	IL53-M10S	1000	M10X1.50	1/2	5/8	1 1/2	3/8	3/16
IL53-M12G	IL53-M12S	2000	M12X1.75	5/8	15/16	1 1/2	3/8	1/2
IL53-M16G	IL53-M16S	3000	M16X2.00	3/4	1-1/8	1 1/2	1/2	5/8
IL53-M20G	IL53-M20S	3000	M20X2.50	1	1-3/16	1 1/2	9/16	11/16
IL53-M24G	IL53-M24S	3000	M24X3.00	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-M6G	IL55-M6S	100	M6X1	1/2	5/8	2	3/8	3/16
IL55-M8G	IL55-M8S	500	M8X1.25	1/2	5/8	2	3/8	3/16
IL55-M10G	IL55-M10S	1000	M10X1.50	1/2	5/8	2	3/8	3/16
IL55-M12G	IL55-M12S	2000	M12X1.75	5/8	15/16	2	3/8	1/2
IL55-M16G	IL55-M16S	3000	M16X2.00	3/4	1-1/8	2	1/2	5/8
IL55-M20G	IL55-M20S	3000	M20X2.50	1	1-3/16	2	9/16	11/16
IL55-M24G	IL55-M24S	3000	M24X3.00	1-1/4	1-1/4	2	5/8	3/4
IL57-M6G	IL57-M6S	100	M6X1	1/2	5/8	3	3/8	3/16
IL57-M8G	IL57-M8S	500	M8X1.25	1/2	5/8	3	3/8	3/16
IL57-M10G	IL57-M10S	1000	M10X1.50	1/2	5/8	3	3/8	3/16
IL57-M12G	IL57-M12S	2000	M12X1.75	5/8	15/16	3	3/8	1/2
IL57-M16G	IL57-M16S	3000	M16X2.00	3/4	1-1/8	3	1/2	5/8
IL57-M20G	IL57-M20S	3000	M20X2.50	1	1-3/16	3	9/16	11/16
IL57-M24G	IL57-M24S	3000	M24X3.00	1-1/4	1-1/4	3	5/8	3/4
IL59-M6G	IL59-M6S	100	M6X1	1/2	5/8	4	3/8	3/16
IL59-M8G	IL59-M8S	500	M8X1.25	1/2	5/8	4	3/8	3/16
IL59-M10G	IL59-M10S	1000	M10X1.50	1/2	5/8	4	3/8	3/16
IL59-M12G	IL59-M12S	2000	M12X1.75	5/8	15/16	4	3/8	1/2
IL59-M16G	IL59-M16S	3000	M16X2.00	3/4	1-1/8	4	1/2	5/8
IL59-M20G	IL59-M20S	3000	M20X2.50	1	1-3/16	4	9/16	11/16
IL59-M24G	IL59-M24S	3000	M24X3.00	1-1/4	1-1/4	4	5/8	3/4



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC - 1" & 2" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- M6 & M8 available in 1" (25mm) length
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 2 " STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx1	IL50-M6Sx1	100	M6X1	1/2	3/4	1	1-3/4	1	3/16
IL50-M8Gx1	IL50-M8Sx1	500	M8X1.25	1/2	3/4	1	1-3/4	1	3/16
IL50-M6G	IL50-M6S	100	M6X1	1/2	3/4	1	2-3/4	2	3/16
IL50-M8G	IL50-M8S	500	M8X1.25	1/2	3/4	1	2-3/4	2	3/16
IL50-M10G	IL50-M10S	1000	M10X1.50	1/2	3/4	1	2-3/4	2	3/16
IL50-M12G	IL50-M12S	2000	M12X1.75	1/2	3/4	1	2-3/4	2	3/16
IL50-M16G	IL50-M16S	3000	M16X2.00	5/8	3/4	1	2-3/4	2	3/16
IL50-M20G	IL50-M20S	3000	M20X2.50	3/4	3/4	1	2-3/4	2	3/16
IL50-M24G	IL50-M24S	3000	M24X3.00	1	1	1	3	2	1/2
IL52-M6Gx1	IL52-M6Sx1	100	M6X1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M8Gx1	IL52-M8Sx1	500	M8X1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M6G	IL52-M6S	100	M6X1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M8G	IL52-M8S	500	M8X1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M10G	IL52-M10S	1000	M10X1.50	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M12G	IL52-M12S	2000	M12X1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M16G	IL52-M16S	3000	M16X2.00	5/8	3/4	1-1/2	2-3/4	2	3/16
IL52-M20G	IL52-M20S	3000	M20X2.50	3/4	3/4	1-1/2	2-3/4	2	3/16
IL52-M24G	IL52-M24S	3000	M24X3.00	1	1	1-1/2	3	2	1/2
IL54-M6Gx1	IL54-M6Sx1	100	M6X1	1/2	3/4	2	1-3/4	1	3/16
IL54-M8Gx1	IL54-M8Sx1	500	M8X1.25	1/2	3/4	2	1-3/4	1	3/16
IL54-M6G	IL54-M6S	100	M6X1	1/2	3/4	2	2-3/4	2	3/16
IL54-M8G	IL54-M8S	500	M8X1.25	1/2	3/4	2	2-3/4	2	3/16
IL54-M10G	IL54-M10S	1000	M10X1.50	1/2	3/4	2	2-3/4	2	3/16
IL54-M12G	IL54-M12S	2000	M12X1.75	1/2	3/4	2	2-3/4	2	3/16
IL54-M16G	IL54-M16S	3000	M16X2.00	5/8	3/4	2	2-3/4	2	3/16
IL54-M20G	IL54-M20S	3000	M20X2.50	3/4	3/4	2	2-3/4	2	3/16
IL54-M24G	IL54-M24S	3000	M24X3.00	1	1	2	3	2	1/2
IL56-M6Gx1	IL56-M6Sx1	100	M6X1	1/2	3/4	3	1-3/4	1	3/16
IL56-M8Gx1	IL56-M8Sx1	500	M8X1.25	1/2	3/4	3	1-3/4	1	3/16
IL56-M6G	IL56-M6S	100	M6X1	1/2	3/4	3	2-3/4	2	3/16
IL56-M8G	IL56-M8S	500	M8X1.25	1/2	3/4	3	2-3/4	2	3/16
IL56-M10G	IL56-M10S	1000	M10X1.50	1/2	3/4	3	2-3/4	2	3/16
IL56-M12G	IL56-M12S	2000	M12X1.75	1/2	3/4	3	2-3/4	2	3/16
IL56-M16G	IL56-M16S	3000	M16X2.00	5/8	3/4	3	2-3/4	2	3/16
IL56-M20G	IL56-M20S	3000	M20X2.50	3/4	3/4	3	2-3/4	2	3/16
IL56-M24G	IL56-M24S	3000	M24X3.00	1	1	3	3	2	1/2
IL58-M6Gx1	IL58-M6Sx1	100	M6X1	1/2	3/4	4	1-3/4	1	3/16
IL58-M8Gx1	IL58-M8Sx1	500	M8X1.25	1/2	3/4	4	1-3/4	1	3/16
IL58-M6G	IL58-M6S	100	M6X1	1/2	3/4	4	2-3/4	2	3/16
IL58-M8G	IL58-M8S	500	M8X1.25	1/2	3/4	4	2-3/4	2	3/16
IL58-M10G	IL58-M10S	1000	M10X1.50	1/2	3/4	4	2-3/4	2	3/16
IL58-M12G	IL58-M12S	2000	M12X1.75	1/2	3/4	4	2-3/4	2	3/16
IL58-M16G	IL58-M16S	3000	M16X2.00	5/8	3/4	4	2-3/4	2	3/16
IL58-M20G	IL58-M20S	3000	M20X2.50	3/4	3/4	4	2-3/4	2	3/16
IL58-M24G	IL58-M24S	3000	M24X3.00	1	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC - 3" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 3" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx3	IL50-M6Sx3	100	M6X1	1/2	3/4	1	3-3/4	3	3/16
IL50-M8Gx3	IL50-M8Sx3	500	M8X1.25	1/2	3/4	1	3-3/4	3	3/16
IL50-M10Gx3	IL50-M10Sx3	1000	M10X1.50	1/2	3/4	1	3-3/4	3	3/16
IL50-M12Gx3	IL50-M12Sx3	2000	M12X1.75	1/2	3/4	1	3-3/4	3	3/16
IL50-M16Gx3	IL50-M16Sx3	3000	M16X2.00	5/8	3/4	1	3-3/4	3	3/16
IL50-M20Gx3	IL50-M20Sx3	3000	M20X2.50	3/4	3/4	1	3-3/4	3	3/16
IL50-M24Gx3	IL50-M24Sx3	3000	M24X3.00	1	1	1	4	3	1/2
IL52-M6Gx3	IL52-M6Sx3	100	M6X1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M8Gx3	IL52-M8Sx3	500	M8X1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M10Gx3	IL52-M10Sx3	1000	M10X1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M12Gx3	IL52-M12Sx3	2000	M12X1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M16Gx3	IL52-M16Sx3	3000	M16X2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL52-M20Gx3	IL52-M20Sx3	3000	M20X2.50	3/4	3/4	1-1/2	3-3/4	3	3/16
IL52-M24Gx3	IL52-M24Sx3	3000	M24X3.00	1	1	1-1/2	4	3	1/2
IL54-M6Gx3	IL54-M6Sx3	100	M6X1	1/2	3/4	2	3-3/4	3	3/16
IL54-M8Gx3	IL54-M8Sx3	500	M8X1.25	1/2	3/4	2	3-3/4	3	3/16
IL54-M10Gx3	IL54-M10Sx3	1000	M10X1.50	1/2	3/4	2	3-3/4	3	3/16
IL54-M12Gx3	IL54-M12Sx3	2000	M12X1.75	1/2	3/4	2	3-3/4	3	3/16
IL54-M16Gx3	IL54-M16Sx3	3000	M16X2.00	5/8	3/4	2	3-3/4	3	3/16
IL54-M20Gx3	IL54-M20Sx3	3000	M20X2.50	3/4	3/4	2	3-3/4	3	3/16
IL54-M24Gx3	IL54-M24Sx3	3000	M24X3.00	1	1	2	4	3	1/2
IL56-M6Gx3	IL56-M6Sx3	100	M6X1	1/2	3/4	3	3-3/4	3	3/16
IL56-M8Gx3	IL56-M8Sx3	500	M8X1.25	1/2	3/4	3	3-3/4	3	3/16
IL56-M10Gx3	IL56-M10Sx3	1000	M10X1.50	1/2	3/4	3	3-3/4	3	3/16
IL56-M12Gx3	IL56-M12Sx3	2000	M12X1.75	1/2	3/4	3	3-3/4	3	3/16
IL56-M16Gx3	IL56-M16Sx3	3000	M16X2.00	5/8	3/4	3	3-3/4	3	3/16
IL56-M20Gx3	IL56-M20Sx3	3000	M20X2.50	3/4	3/4	3	3-3/4	3	3/16
IL56-M24Gx3	IL56-M24Sx3	3000	M24X3.00	1	1	3	4	3	1/2
IL58-M6Gx3	IL58-M6Sx3	100	M6X1	1/2	3/4	4	3-3/4	3	3/16
IL58-M8Gx3	IL58-M8Sx3	500	M8X1.25	1/2	3/4	4	3-3/4	3	3/16
IL58-M10Gx3	IL58-M10Sx3	1000	M10X1.50	1/2	3/4	4	3-3/4	3	3/16
IL58-M12Gx3	IL58-M12Sx3	2000	M12X1.75	1/2	3/4	4	3-3/4	3	3/16
IL58-M16Gx3	IL58-M16Sx3	3000	M16X2.00	5/8	3/4	4	3-3/4	3	3/16
IL58-M20Gx3	IL58-M20Sx3	3000	M20X2.50	3/4	3/4	4	3-3/4	3	3/16
IL58-M24Gx3	IL58-M24Sx3	3000	M24X3.00	1	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC - 4" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 4" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M8Gx4	IL50-M8Sx4	500	M8X1.25	1/2	3/4	1	4-3/4	4	3/16
IL50-M10Gx4	IL50-M10Sx4	1000	M10X1.50	1/2	3/4	1	4-3/4	4	3/16
IL50-M12Gx4	IL50-M12Sx4	2000	M12X1.75	1/2	3/4	1	4-3/4	4	3/16
IL50-M16Gx4	IL50-M16Sx4	3000	M16X2.00	5/8	3/4	1	4-3/4	4	3/16
IL50-M20Gx4	IL50-M20Sx4	3000	M20X2.50	3/4	3/4	1	4-3/4	4	3/16
IL50-M24Gx4	IL50-M24Sx4	3000	M24X3.00	1	1	1	5	4	1/2
IL52-M8Gx4	IL52-M8Sx4	500	M8X1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M10Gx4	IL52-M10Sx4	1000	M10X1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M12Gx4	IL52-M12Sx4	2000	M12X1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M16Gx4	IL52-M16Sx4	3000	M16X2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-M20Gx4	IL52-M20Sx4	3000	M20X2.50	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-M24Gx4	IL52-M24Sx4	3000	M24X3.00	1	1	1-1/2	5	4	1/2
IL54-M8Gx4	IL54-M8Sx4	500	M8X1.25	1/2	3/4	2	4-3/4	4	3/16
IL54-M10Gx4	IL54-M10Sx4	1000	M10X1.50	1/2	3/4	2	4-3/4	4	3/16
IL54-M12Gx4	IL54-M12Sx4	2000	M12X1.75	1/2	3/4	2	4-3/4	4	3/16
IL54-M16Gx4	IL54-M16Sx4	3000	M16X2.00	5/8	3/4	2	4-3/4	4	3/16
IL54-M20Gx4	IL54-M20Sx4	3000	M20X2.50	3/4	3/4	2	4-3/4	4	3/16
IL54-M24Gx4	IL54-M24Sx4	3000	M24X3.00	1	1	2	5	4	1/2
IL56-M8Gx4	IL56-M8Sx4	500	M8X1.25	1/2	3/4	3	4-3/4	4	3/16
IL56-M10Gx4	IL56-M10Sx4	1000	M10X1.50	1/2	3/4	3	4-3/4	4	3/16
IL56-M12Gx4	IL56-M12Sx4	2000	M12X1.75	1/2	3/4	3	4-3/4	4	3/16
IL56-M16Gx4	IL56-M16Sx4	3000	M16X2.00	5/8	3/4	3	4-3/4	4	3/16
IL56-M20Gx4	IL56-M20Sx4	3000	M20X2.50	3/4	3/4	3	4-3/4	4	3/16
IL56-M24Gx4	IL56-M24Sx4	3000	M24X3.00	1	1	3	5	4	1/2
IL58-M8Gx4	IL58-M8Sx4	500	M8X1.25	1/2	3/4	4	4-3/4	4	3/16
IL58-M10Gx4	IL58-M10Sx4	1000	M10X1.50	1/2	3/4	4	4-3/4	4	3/16
IL58-M12Gx4	IL58-M12Sx4	2000	M12X1.75	1/2	3/4	4	4-3/4	4	3/16
IL58-M16Gx4	IL58-M16Sx4	3000	M16X2.00	5/8	3/4	4	4-3/4	4	3/16
IL58-M20Gx4	IL58-M20Sx4	3000	M20X2.50	3/4	3/4	4	4-3/4	4	3/16
IL58-M24Gx4	IL58-M24Sx4	3000	M24X3.00	1	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC - 5" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 5" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx5	IL50-M10Sx5	1000	M10X1.50	1/2	3/4	1	5-3/4	5	3/16
IL50-M12Gx5	IL50-M12Sx5	2000	M12X1.75	1/2	3/4	1	5-3/4	5	3/16
IL50-M16Gx5	IL50-M16Sx5	3000	M16X2.00	5/8	3/4	1	5-3/4	5	3/16
IL50-M20Gx5	IL50-M20Sx5	3000	M20X2.50	3/4	3/4	1	5-3/4	5	3/16
IL50-M24Gx5	IL50-M24Sx5	3000	M24X3.00	1	1	1	6	5	1/2
IL52-M10Gx5	IL52-M10Sx5	1000	M10X1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M12Gx5	IL52-M12Sx5	2000	M12X1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M16Gx5	IL52-M16Sx5	3000	M16X2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-M20Gx5	IL52-M20Sx5	3000	M20X2.50	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-M24Gx5	IL52-M24Sx5	3000	M24X3.00	1	1	1-1/2	6	5	1/2
IL54-M10Gx5	IL54-M10Sx5	1000	M10X1.50	1/2	3/4	2	5-3/4	5	3/16
IL54-M12Gx5	IL54-M12Sx5	2000	M12X1.75	1/2	3/4	2	5-3/4	5	3/16
IL54-M16Gx5	IL54-M16Sx5	3000	M16X2.00	5/8	3/4	2	5-3/4	5	3/16
IL54-M20Gx5	IL54-M20Sx5	3000	M20X2.50	3/4	3/4	2	5-3/4	5	3/16
IL54-M24Gx5	IL54-M24Sx5	3000	M24X3.00	1	1	2	6	5	1/2
IL56-M10Gx5	IL56-M10Sx5	1000	M10X1.50	1/2	3/4	3	5-3/4	5	3/16
IL56-M12Gx5	IL56-M12Sx5	2000	M12X1.75	1/2	3/4	3	5-3/4	5	3/16
IL56-M16Gx5	IL56-M16Sx5	3000	M16X2.00	5/8	3/4	3	5-3/4	5	3/16
IL56-M20Gx5	IL56-M20Sx5	3000	M20X2.50	3/4	3/4	3	5-3/4	5	3/16
IL56-M24Gx5	IL56-M24Sx5	3000	M24X3.00	1	1	3	6	5	1/2
IL58-M10Gx5	IL58-M10Sx5	1000	M10X1.50	1/2	3/4	4	5-3/4	5	3/16
IL58-M12Gx5	IL58-M12Sx5	2000	M12X1.75	1/2	3/4	4	5-3/4	5	3/16
IL58-M16Gx5	IL58-M16Sx5	3000	M16X2.00	5/8	3/4	4	5-3/4	5	3/16
IL58-M20Gx5	IL58-M20Sx5	3000	M20X2.50	3/4	3/4	4	5-3/4	5	3/16
IL58-M24Gx5	IL58-M24Sx5	3000	M24X3.00	1	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC - 6" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 6" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx6	IL50-M10Sx6	1000	M10X1.50	1/2	3/4	1	6-3/4	6	3/16
IL50-M12Gx6	IL50-M12Sx6	2000	M12X1.75	1/2	3/4	1	6-3/4	6	3/16
IL50-M16Gx6	IL50-M16Sx6	3000	M16X2.00	5/8	3/4	1	6-3/4	6	3/16
IL50-M20Gx6	IL50-M20Sx6	3000	M20X2.50	3/4	3/4	1	6-3/4	6	3/16
IL50-M24Gx6	IL50-M24Sx6	3000	M24X3.00	1	1	1	7	6	1/2
IL52-M10Gx6	IL52-M10Sx6	1000	M10X1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M12Gx6	IL52-M12Sx6	2000	M12X1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M16Gx6	IL52-M16Sx6	3000	M16X2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-M20Gx6	IL52-M20Sx6	3000	M20X2.50	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-M24Gx6	IL52-M24Sx6	3000	M24X3.00	1	1	1-1/2	7	6	1/2
IL54-M10Gx6	IL54-M10Sx6	1000	M10X1.50	1/2	3/4	2	6-3/4	6	3/16
IL54-M12Gx6	IL54-M12Sx6	2000	M12X1.75	1/2	3/4	2	6-3/4	6	3/16
IL54-M16Gx6	IL54-M16Sx6	3000	M16X2.00	5/8	3/4	2	6-3/4	6	3/16
IL54-M20Gx6	IL54-M20Sx6	3000	M20X2.50	3/4	3/4	2	6-3/4	6	3/16
IL54-M24Gx6	IL54-M24Sx6	3000	M24X3.00	1	1	2	7	6	1/2
IL56-M10Gx6	IL56-M10Sx6	1000	M10X1.50	1/2	3/4	3	6-3/4	6	3/16
IL56-M12Gx6	IL56-M12Sx6	2000	M12X1.75	1/2	3/4	3	6-3/4	6	3/16
IL56-M16Gx6	IL56-M16Sx6	3000	M16X2.00	5/8	3/4	3	6-3/4	6	3/16
IL56-M20Gx6	IL56-M20Sx6	3000	M20X2.50	3/4	3/4	3	6-3/4	6	3/16
IL56-M24Gx6	IL56-M24Sx6	3000	M24X3.00	1	1	3	7	6	1/2
IL58-M10Gx6	IL58-M10Sx6	1000	M10X1.50	1/2	3/4	4	6-3/4	6	3/16
IL58-M12Gx6	IL58-M12Sx6	2000	M12X1.75	1/2	3/4	4	6-3/4	6	3/16
IL58-M16Gx6	IL58-M16Sx6	3000	M16X2.00	5/8	3/4	4	6-3/4	6	3/16
IL58-M20Gx6	IL58-M20Sx6	3000	M20X2.50	3/4	3/4	4	6-3/4	6	3/16
IL58-M24Gx6	IL58-M24Sx6	3000	M24X3.00	1	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY SWIVEL

METRIC - 8" STUD

LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS


The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 8" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M12Gx8	IL50-M12Sx8	2000	M12X1.75	1/2	3/4	1	8-3/4	8	3/16
IL50-M16Gx8	IL50-M16Sx8	3000	M16X2.00	5/8	3/4	1	8-3/4	8	3/16
IL50-M20Gx8	IL50-M20Sx8	3000	M20X2.50	3/4	3/4	1	8-3/4	8	3/16
IL50-M24Gx8	IL50-M24Sx8	3000	M24X3.00	1	1	1	9	8	1/2
IL52-M12Gx8	IL52-M12Sx8	2000	M12X1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-M16Gx8	IL52-M16Sx8	3000	M16X2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-M20Gx8	IL52-M20Sx8	3000	M20X2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-M24Gx8	IL52-M24Sx8	3000	M24X3.00	1	1	1-1/2	9	8	1/2
IL54-M12Gx8	IL54-M12Sx8	2000	M12X1.75	1/2	3/4	2	8-3/4	8	3/16
IL54-M16Gx8	IL54-M16Sx8	3000	M16X2.00	5/8	3/4	2	8-3/4	8	3/16
IL54-M20Gx8	IL54-M20Sx8	3000	M20X2.50	3/4	3/4	2	8-3/4	8	3/16
IL54-M24Gx8	IL54-M24Sx8	3000	M24X3.00	1	1	2	9	8	1/2
IL56-M12Gx8	IL56-M12Sx8	2000	M12X1.75	1/2	3/4	3	8-3/4	8	3/16
IL56-M16Gx8	IL56-M16Sx8	3000	M16X2.00	5/8	3/4	3	8-3/4	8	3/16
IL56-M20Gx8	IL56-M20Sx8	3000	M20X2.50	3/4	3/4	3	8-3/4	8	3/16
IL56-M24Gx8	IL56-M24Sx8	3000	M24X3.00	1	1	3	9	8	1/2
IL58-M12Gx8	IL58-M12Sx8	2000	M12X1.75	1/2	3/4	4	8-3/4	8	3/16
IL58-M16Gx8	IL58-M16Sx8	3000	M16X2.00	5/8	3/4	4	8-3/4	8	3/16
IL58-M20Gx8	IL58-M20Sx8	3000	M20X2.50	3/4	3/4	4	8-3/4	8	3/16
IL58-M24Gx8	IL58-M24Sx8	3000	M24X3.00	1	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**


Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM DUTY METRIC

POLY BASE FIXED SOCKET


METRIC POLY BASE FIXED SOCKET LEVELING GLIDES

The IEC *Metric Poly Base Steel and Stainless Steel Fixed Socket Glide with Rubber Pad* is ideal for medium-duty load requirements. The rubber pad provides a non-skid surface protecting feature. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base 3/8" thick with a zinc-plated steel socket.

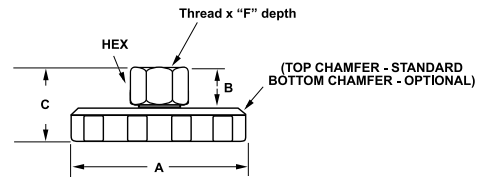

Optional bottom chamfer (reverse assembly) — with 90° top edge

(Add "-BC" to Part Number)

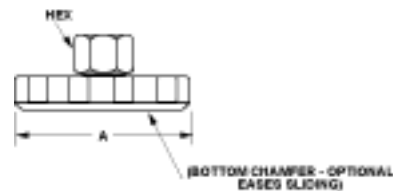

METRIC POLY FIXED SOCKET LEVELERS

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL7-M6B-T	IL7-M6BS-T	100	M6x1	1/2	1	9/32	5/8	1/4
IL7-M8B-T	IL7-M8BS-T	500	M8x1.25	1/2	1	3/8	3/4	1/4
IL7-M10B-T	IL7-M10BS-T	1000	M10x1.50	1/2	1	1/2	7/8	3/8
IL7-M12B-T	IL7-M12BS-T	2000	M12x1.75	5/8	1	1/2	7/8	3/8
IL7-M16B-T	IL7-M16BS-T	3000	M16x2.00	3/4	1	5/8	1	1/2
IL7-M20B-T	IL7-M20BS-T	3000	M20x3.00	1	1	3/4	1-1/8	5/8
IL8-M6B-T	IL8-M6BS-T	100	M6x1	1/2	1-1/2	9/32	5/8	1/4
IL8-M8B-T	IL8-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	3/4	1/4
IL8-M10B-T	IL8-M10BS-T	1000	M10x1.50	1/2	1-1/2	1/2	7/8	3/8
IL8-M12B-T	IL8-M12BS-T	2000	M12x1.75	5/8	1-1/2	1/2	7/8	3/8
IL8-M16B-T	IL8-M16BS-T	3000	M16x2.00	3/4	1-1/2	5/8	1	1/2
IL8-M20B-T	IL8-M20BS-T	3000	M20x3.00	1	1-1/2	3/4	1-1/8	5/8
IL7A-M6B-T	IL7A-M6BS-T	100	M6x1	1/2	2	9/32	5/8	1/4
IL7A-M8B-T	IL7A-M8BS-T	500	M8x1.25	1/2	2	3/8	3/4	1/4
IL7A-M10B-T	IL7A-M10BS-T	1000	M10x1.50	1/2	2	1/2	7/8	3/8
IL7A-M12B-T	IL7A-M12BS-T	2000	M12x1.75	5/8	2	1/2	7/8	3/8
IL7A-M16B-T	IL7A-M16BS-T	3000	M16x2.00	3/4	2	5/8	1	1/2
IL7A-M20B-T	IL7A-M20BS-T	3000	M20x3.00	1	2	3/4	1-1/8	5/8
IL7M-M6B-T	IL7M-M6BS-T	100	M6x1	1/2	2-1/2	9/32	5/8	1/4
IL7M-M8B-T	IL7M-M8BS-T	500	M8x1.25	1/2	2-1/2	3/8	3/4	1/4
IL7M-M10B-T	IL7M-M10BS-T	1000	M10x1.50	1/2	2-1/2	1/2	7/8	3/8
IL7M-M12B-T	IL7M-M12BS-T	2000	M12x1.75	5/8	2-1/2	1/2	7/8	3/8
IL7M-M16B-T	IL7M-M16BS-T	3000	M16x2.00	3/4	2-1/2	5/8	1	1/2
IL7M-M20B-T	IL7M-M20BS-T	3000	M20x3.00	1	2-1/2	3/4	1-1/8	5/8
IL8A-M6B-T	IL8A-M6BS-T	100	M6x1.0	1/2	3	9/32	5/8	1/4
IL8A-M8B-T	IL8A-M8BS-T	500	M8x1.25	1/2	3	3/8	3/4	1/4
IL8A-M10B-T	IL8A-M10BS-T	1000	M10x1.50	1/2	3	1/2	7/8	3/8
IL8A-M12B-T	IL8A-M12BS-T	2000	M12x1.75	5/8	3	1/2	7/8	3/8
IL8A-M16B-T	IL8A-M16BS-T	3000	M16x2.00	3/4	3	5/8	1	1/2
IL8A-M20B-T	IL8A-M20BS-T	3000	M20x3.00	1	3	3/4	1-1/8	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**


Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM-DUTY LEVELERS

METRIC POLY BASE FIXED SOCKET WITH RUBBER PAD

**METRIC POLY BASE FIXED SOCKET
LEVELING GLIDES WITH RUBBER PAD**

The IEC Metric Poly Base Steel and Stainless Steel Fixed Socket Glide with Rubber Pad is ideal for medium-duty load requirements. The rubber pad provides a non-skid surface protecting feature. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base 3/8" thick with a zinc-plated steel socket.

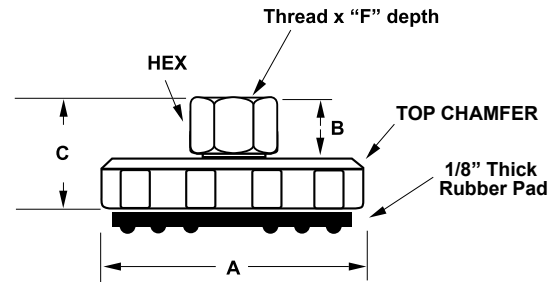

Rubber Pad Bottom View

METRIC POLY FIXED SOCKET LEVELERS WITH RUBBER PAD

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL7-M6B-T-P	IL7-M6BS-T-P	100	M6x1	1/2	1	3/16-9/32	5/8	1/4
IL7-M8B-T-P	IL7-M8BS-T-P	500	M8x1.25	1/2	1	3/8	3/4	1/4
IL7-M10B-T-P	IL7-M10BS-T-P	1000	M10x1.50	1/2	1	1/2	7/8	3/8
IL7-M12B-T-P	IL7-M12BS-T-P	2000	M12x1.75	5/8	1	1/2	7/8	3/8
IL7-M16B-T-P	IL7-M16BS-T-P	3000	M16x2.00	3/4	1	5/8	1	1/2
IL7-M20B-T-P	IL7-M20BS-T-P	3000	M20x3.00	1	1	3/4	1-1/8	5/8
IL8-M6B-T-P	IL8-M6BS-T-P	100	M6x1	1/2	1-1/2	3/16-9/32	5/8	1/4
IL8-M8B-T-P	IL8-M8BS-T-P	500	M8x1.25	1/2	1-1/2	3/8	3/4	1/4
IL8-M10B-T-P	IL8-M10BS-T-P	1000	M10x1.50	1/2	1-1/2	1/2	7/8	3/8
IL8-M12B-T-P	IL8-M12BS-T-P	2000	M12x1.75	5/8	1-1/2	1/2	7/8	3/8
IL8-M16B-T-P	IL8-M16BS-T-P	3000	M16x2.00	3/4	1-1/2	5/8	1	1/2
IL8-M20B-T-P	IL8-M20BS-T-P	3000	M20x3.00	1	1-1/2	3/4	1-1/8	5/8
IL7A-M6B-T-P	IL7A-M6BS-T-P	100	M6x1	1/2	2	3/16-9/32	5/8	1/4
IL7A-M8B-T-P	IL7A-M8BS-T-P	500	M8x1.25	1/2	2	3/8	3/4	1/4
IL7A-M10B-T-P	IL7A-M10BS-T-P	1000	M10x1.50	1/2	2	1/2	7/8	3/8
IL7A-M12B-T-P	IL7A-M12BS-T-P	2000	M12x1.75	5/8	2	1/2	7/8	3/8
IL7A-M16B-T-P	IL7A-M16BS-T-P	3000	M16x2.00	3/4	2	5/8	1	1/2
IL7A-M20B-T-P	IL7A-M20BS-T-P	3000	M20x3.00	1	2	3/4	1-1/8	5/8
IL8A-M6B-T-P	IL8A-M6BS-T-P	100	M6x1.0	1/2	3	3/16-9/32	5/8	1/4
IL8A-M8B-T-P	IL8A-M8BS-T-P	500	M8x1.25	1/2	3	3/8	3/4	1/4
IL8A-M10B-T-P	IL8A-M10BS-T-P	1000	M10x1.50	1/2	3	1/2	7/8	3/8
IL8A-M12B-T-P	IL8A-M12BS-T-P	2000	M12x1.75	5/8	3	1/2	7/8	3/8
IL8A-M16B-T-P	IL8A-M16BS-T-P	3000	M16x2.00	3/4	3	5/8	1	1/2
IL8A-M20B-T-P	IL8A-M20BS-T-P	3000	M20x3.00	1	3	3/4	1-1/8	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

**METRIC POLY BASE
FIXED - STUD**

**METRIC POLY BASE FIXED STUD
LEVELING GLIDES**


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

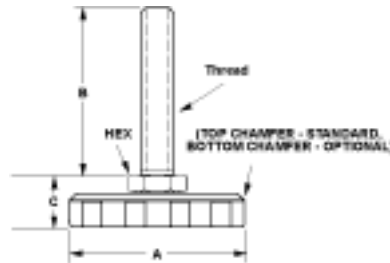

Optional bottom chamfer (reverse assembly) — with 90° top edge

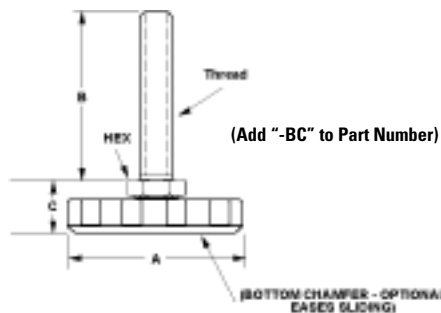

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-M6Bx25	IL7-M6BSx25	100	M6	1/2	1	25	11/16
IL7-M6Bx38	IL7-M6BSx38	100	M6	1/2	1	38	11/16
IL7-M6Bx51	IL7-M6BSx51	100	M6	1/2	1	51	11/16
IL7-M8Bx38	IL7-M8BSx38	500	M8	1/2	1	38	11/16
IL7-M8Bx51	IL7-M8BSx51	500	M8	1/2	1	51	11/16
IL7-M8Bx62	IL7-M8BSx62	500	M8	1/2	1	62	11/16
IL7-M10Bx38	IL7-M10BSx38	1000	M10	1/2	1	38	11/16
IL7-M10Bx51	IL7-M10BSx51	1000	M10	1/2	1	51	11/16
IL7-M10Bx62	IL7-M10BSx62	1000	M10	1/2	1	62	11/16
IL7-M12Bx38	IL7-M12BSx38	2000	M12	1/2	1	38	11/16
IL7-M12Bx51	IL7-M12BSx51	2000	M12	1/2	1	51	11/16
IL7-M12Bx75	IL7-M12BSx75	2000	M12	1/2	1	75	11/16
IL7-M12Bx102	IL7-M12BSx102	2000	M12	1/2	1	102	11/16
IL7-M16Bx51	IL7-M16BSx51	2500	M16	5/8	1	51	11/16
IL7-M16Bx90-BR	IL7-M16BSx90-BR	2500	M16	5/8	1	90	11/16
IL7-M16Bx102	IL7-M16BSx102	2500	M16	5/8	1	102	11/16
IL7-M16Bx115-BR	IL7-M16BSx115-BR	2500	M16	5/8	1	115	11/16
IL8-M6Bx25	IL8-M6BSx25	100	M6	1/2	1-1/2	25	11/16
IL8-M6Bx38	IL8-M6BSx38	100	M6	1/2	1-1/2	38	11/16
IL8-M6Bx51	IL8-M6BSx51	100	M6	1/2	1-1/2	51	11/16
IL8-M8Bx38	IL8-M8BSx38	500	M8	1/2	1-1/2	38	11/16
IL8-M8Bx51	IL8-M8BSx51	500	M8	1/2	1-1/2	51	11/16
IL8-M8Bx62	IL8-M8BSx62	500	M8	1/2	1-1/2	62	11/16
IL8-M10Bx38	IL8-M10BSx38S	1000	M10	1/2	1-1/2	38	11/16
IL8-M10Bx51	IL8-M10BSx51S	1000	M10	1/2	1-1/2	51	11/16
IL8-M10Bx62	IL8-M10BSx62S	1000	M10	1/2	1-1/2	62	11/16
IL8-M12Bx38	IL8-M12BSx38	2000	M12	1/2	1-1/2	38	11/16
IL8-M12Bx51	IL8-M12BSx51	2000	M12	1/2	1-1/2	51	11/16
IL8-M12Bx75	IL8-M12BSx75	2000	M12	1/2	1-1/2	75	11/16
IL8-M12Bx102	IL8-M12BSx102	2000	M12	1/2	1-1/2	102	11/16
IL8-M16Bx51	IL8-M16BSx51	2500	M16	5/8	1-1/2	51	11/16
IL8-M16Bx90-BR	IL8-M16BSx90-BR	2500	M16	5/8	1-1/2	90	11/16
IL8-M16Bx102	IL8-M16BSx102	2500	M16	5/8	1-1/2	102	11/16
IL8-M16Bx115-BR	IL8-M16BSx115-BR	2500	M16	5/8	1-1/2	115	11/16
IL7A-M6Bx25	IL7A-M6BSx25	100	M6	1/2	2	25	11/16
IL7A-M6Bx38	IL7A-M6BSx38	100	M6	1/2	2	38	11/16
IL7A-M6Bx51	IL7A-M6BSx51	100	M6	1/2	2	51	11/16
IL7A-M8Bx38	IL7A-M8BSx38	500	M8	1/2	2	38	11/16
IL7A-M8Bx51	IL7A-M8BSx51	500	M8	1/2	2	51	11/16
IL7A-M8Bx62	IL7A-M8BSx62	500	M8	1/2	2	62	11/16
IL7A-M10Bx38	IL7A-M10BSx38	1000	M10	1/2	2	38	11/16
IL7A-M10Bx51	IL7A-M10BSx51	1000	M10	1/2	2	51	11/16
IL7A-M10Bx62	IL7A-M10BSx62	1000	M10	1/2	2	62	11/16
IL7A-M12Bx38	IL7A-M12BSx38	2000	M12	1/2	2	38	11/16
IL7A-M12Bx51	IL7A-M12BSx51	2000	M12	1/2	2	51	11/16
IL7A-M12Bx75	IL7A-M12BSx75	2000	M12	1/2	2	75	11/16
IL7A-M12Bx102	IL7A-M12BSx102	2000	M12	1/2	2	102	11/16
IL7A-M16Bx51	IL7A-M16BSx51	2500	M16	5/8	2	51	11/16
IL7A-M16Bx90-BR	IL7A-M16BSx90-BR	2500	M16	5/8	2	90	11/16
IL7A-M16Bx102	IL7A-M16BSx102	2500	M16	5/8	2	102	11/16
IL7A-M16Bx115-BR	IL7A-M16BSx115-BR	2500	M16	5/8	2	115	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

METRIC POLY BASE FIXED STUD WITH RUBBER PAD

**METRIC POLY BASE FIXED STUD
LEVELING GLIDES WITH RUBBER PAD**


The IEC Metric Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad offers metric threads ideal for medium-duty load requirements. The rubber pad provides a non-skid surface protecting feature. The stud tilts several degrees under load to adjust for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

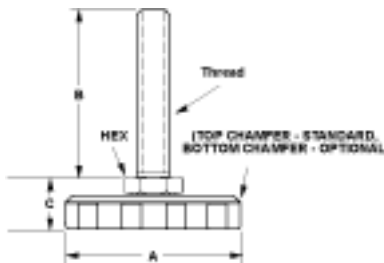

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-M6Bx25-P	IL7-M6BSx25-P	100	M6	1/2	1	25	11/16
IL7-M6Bx38-P	IL7-M6BSx38-P	100	M6	1/2	1	38	11/16
IL7-M6Bx51-P	IL7-M6BSx51-P	100	M6	1/2	1	51	11/16
IL7-M8Bx38-P	IL7-M8BSx38-P	500	M8	1/2	1	38	11/16
IL7-M8Bx51-P	IL7-M8BSx51-P	500	M8	1/2	1	51	11/16
IL7-M8Bx62-P	IL7-M8BSx62-P	500	M8	1/2	1	62	11/16
IL7-M10Bx38-P	IL7-M10BSx38-P	1000	M10	1/2	1	38	11/16
IL7-M10Bx51-P	IL7-M10BSx51-P	1000	M10	1/2	1	51	11/16
IL7-M10Bx62-P	IL7-M10BSx62-P	1000	M10	1/2	1	62	11/16
IL7-M12Bx38-P	IL7-M12BSx38-P	2000	M12	1/2	1	38	11/16
IL7-M12Bx51-P	IL7-M12BSx51-P	2000	M12	1/2	1	51	11/16
IL7-M12Bx75-P	IL7-M12BSx75-P	2000	M12	1/2	1	75	11/16
IL7-M12Bx102-P	IL7-M12BSx102-P	2000	M12	1/2	1	102	11/16
IL7-M16Bx51-P	IL7-M16BSx51-P	2500	M16	5/8	1	51	11/16
IL7-M16Bx90-BR-P	IL7-M16BSx90-BR-P	2500	M16	5/8	1	90	11/16
IL7-M16Bx102-P	IL7-M16BSx102-P	2500	M16	5/8	1	102	11/16
IL7-M16Bx115-BR-P	IL7-M16BSx115-BR-P	2500	M16	5/8	1	115	11/16
IL8-M6Bx25-P	IL8-M6BSx25-P	100	M6	1/2	1-1/2	25	11/16
IL8-M6Bx38-P	IL8-M6BSx38-P	100	M6	1/2	1-1/2	38	11/16
IL8-M6Bx51-P	IL8-M6BSx51-P	100	M6	1/2	1-1/2	51	11/16
IL8-M8Bx38-P	IL8-M8BSx38-P	500	M8	1/2	1-1/2	38	11/16
IL8-M8Bx51-P	IL8-M8BSx51-P	500	M8	1/2	1-1/2	51	11/16
IL8-M8Bx62-P	IL8-M8BSx62-P	500	M8	1/2	1-1/2	62	11/16
IL8-M10Bx38-P	IL8-M10BSx38-P	1000	M10	1/2	1-1/2	38	11/16
IL8-M10Bx51-P	IL8-M10BSx51-P	1000	M10	1/2	1-1/2	51	11/16
IL8-M10Bx62-P	IL8-M10BSx62-P	1000	M10	1/2	1-1/2	62	11/16
IL8-M12Bx38-P	IL8-M12BSx38-P	2000	M12	1/2	1-1/2	38	11/16
IL8-M12Bx51-P	IL8-M12BSx51-P	2000	M12	1/2	1-1/2	51	11/16
IL8-M12Bx75-P	IL8-M12BSx75-P	2000	M12	1/2	1-1/2	75	11/16
IL8-M12Bx102-P	IL8-M12BSx102-P	2000	M12	1/2	1-1/2	102	11/16
IL8-M16Bx51-P	IL8-M16BSx51-P	2500	M16	5/8	1-1/2	51	11/16
IL8-M16Bx90-BR-P	IL8-M16BSx90-BR-P	2500	M16	5/8	1-1/2	90	11/16
IL8-M16Bx102-P	IL8-M16BSx102-P	2500	M16	5/8	1-1/2	102	11/16
IL8-M16Bx115-BR-P	IL8-M16BSx115-BR-P	2500	M16	5/8	1-1/2	115	11/16
IL7A-M6Bx25-P	IL7A-M6BSx25-P	100	M6	1/2	2	25	11/16
IL7A-M6Bx38-P	IL7A-M6BSx38-P	100	M6	1/2	2	38	11/16
IL7A-M6Bx51-P	IL7A-M6BSx51-P	100	M6	1/2	2	51	11/16
IL7A-M8Bx38-P	IL7A-M8BSx38-P	500	M8	1/2	2	38	11/16
IL7A-M8Bx51-P	IL7A-M8BSx51-P	500	M8	1/2	2	51	11/16
IL7A-M8Bx62-P	IL7A-M8BSx62-P	500	M8	1/2	2	62	11/16
IL7A-M10Bx38-P	IL7A-M10BSx38-P	1000	M10	1/2	2	38	11/16
IL7A-M10Bx51-P	IL7A-M10BSx51-P	1000	M10	1/2	2	51	11/16
IL7A-M10Bx62-P	IL7A-M10BSx62-P	1000	M10	1/2	2	62	11/16
IL7A-M12Bx38-P	IL7A-M12BSx38-P	2000	M12	1/2	2	38	11/16
IL7A-M12Bx51-P	IL7A-M12BSx51-P	2000	M12	1/2	2	51	11/16
IL7A-M12Bx75-P	IL7A-M12BSx75-P	2000	M12	1/2	2	75	11/16
IL7A-M12Bx102-P	IL7A-M12BSx102-P	2000	M12	1/2	2	102	11/16
IL7A-M16Bx51-P	IL7A-M16BSx51-P	2500	M16	5/8	2	51	11/16
IL7A-M16Bx90-BR-P	IL7A-M16BSx90-BR-P	2500	M16	5/8	2	90	11/16
IL7A-M16Bx102-P	IL7A-M16BSx102-P	2500	M16	5/8	2	102	11/16
IL7A-M16Bx115-BR-P	IL7A-M16BSx115-BR-P	2500	M16	5/8	2	115	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: **562.597.4533** eMail: **sales@iec-corp.com**

Web: **www.levelingmounts.com & www.iec-corp.com**

MEDIUM-DUTY LEVELERS

**METRIC POLY BASE
FIXED - STUD**

**METRIC POLY BASE FIXED STUD
LEVELING GLIDES**


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

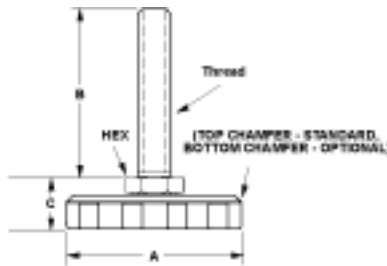

Optional bottom chamfer (reverse assembly) — with 90° top edge

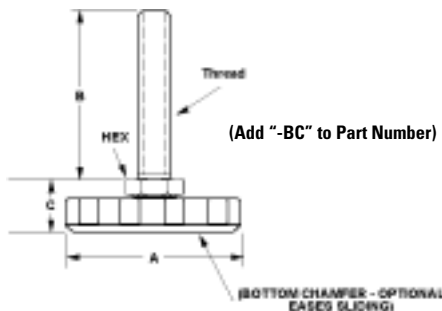

Steel	SS	Load	Thd	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-M6Bx25	IL7M-M6BSx25	100	M6	1/2	2-1/2	25	11/16
IL7M-M6Bx38	IL7M-M6BSx38	100	M6	1/2	2-1/2	38	11/16
IL7M-M6Bx51	IL7M-M6BSx51	100	M6	1/2	2-1/2	51	11/16
IL7M-M8Bx38	IL7M-M8BSx38	500	M8	1/2	2-1/2	38	11/16
IL7M-M8Bx51	IL7M-M8BSx51	500	M8	1/2	2-1/2	51	11/16
IL7M-M8Bx62	IL7M-M8BSx62	500	M8	1/2	2-1/2	62	11/16
IL7M-M10Bx38	IL7M-M10BSx38	1000	M10	1/2	2-1/2	38	11/16
IL7M-M10Bx51	IL7M-M10BSx51	1000	M10	1/2	2-1/2	51	11/16
IL7M-M10Bx62	IL7M-M10BSx62	1000	M10	1/2	2-1/2	62	11/16
IL7M-M12Bx38	IL7M-M12BSx38	2000	M12	1/2	2-1/2	38	11/16
IL7M-M12Bx51	IL7M-M12BSx51	2000	M12	1/2	2-1/2	51	11/16
IL7M-M12Bx75	IL7M-M12BSx75	2000	M12	1/2	2-1/2	75	11/16
IL7M-M12Bx102	IL7M-M12BSx102	2000	M12	1/2	2-1/2	102	11/16
IL7M-M16Bx51	IL7M-M16BSx51	2500	M16	5/8	2-1/2	51	11/16
IL7M-M16Bx90-BR	IL7M-M16BSx90-BR	2500	M16	5/8	2-1/2	90	11/16
IL7M-M16Bx102	IL7M-M16BSx102	2500	M16	5/8	2-1/2	102	11/16
IL7M-M16Bx115-BR	IL7M-M16BSx115-BR	2500	M16	5/8	2-1/2	115	11/16
IL8A-M6Bx25	IL8A-M6BSx25	100	M6	1/2	3	25	11/16
IL8A-M6Bx38	IL8A-M6BSx38	100	M6	1/2	3	38	11/16
IL8A-M6Bx51	IL8A-M6BSx51	100	M6	1/2	3	51	11/16
IL8A-M8Bx38	IL8A-M8BSx38	500	M8	1/2	3	38	11/16
IL8A-M8Bx51	IL8A-M8BSx51	500	M8	1/2	3	51	11/16
IL8A-M8Bx62	IL8A-M8BSx62	500	M8	1/2	3	62	11/16
IL8A-M10Bx38	IL8A-M10BSx38	1000	M10	1/2	3	38	11/16
IL8A-M10Bx51	IL8A-M10BSx51	1000	M10	1/2	3	51	11/16
IL8A-M10Bx62	IL8A-M10BSx62	1000	M10	1/2	3	62	11/16
IL8A-M12Bx38	IL8A-M12BSx38	2000	M12	1/2	3	38	11/16
IL8A-M12Bx51	IL8A-M12BSx51	2000	M12	1/2	3	51	11/16
IL8A-M12Bx75	IL8A-M12BSx75	2000	M12	1/2	3	75	11/16
IL8A-M12Bx102	IL8A-M12BSx102	2000	M12	1/2	3	102	11/16
IL8A-M16Bx51	IL8A-M16BSx51	2500	M16	5/8	3	51	11/16
IL8A-M16Bx90-BR	IL8A-M16BSx90-BR	2500	M16	5/8	3	90	11/16
IL8A-M16Bx102	IL8A-M16BSx102	2500	M16	5/8	3	102	11/16
IL8A-M16Bx115-BR	IL8A-M16BSx115-BR	2500	M16	5/8	3	115	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

METRIC POLY BASE FIXED STUD STUD WITH RUBBER PAD

METRIC POLY BASE FIXED STUD LEVELING GLIDES WITH RUBBER PAD


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad* offers metric threads ideal for medium-duty load requirements. The rubber pad provides a non-skid surface protecting feature. The stud tilts several degrees under load to adjust for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

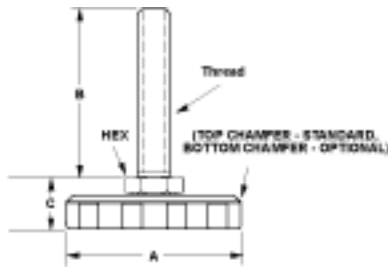

Steel	SS	Load	Thd	Hex	A	B(mm)	C
Metric Poly Base Steel/Stainless Steel Fixed Stud with Rubber Pad							
IL8A-M6Bx25-P	IL8A-M6BSx25-P	100	M6	1/2	3	25	11/16
IL8A-M6Bx38-P	IL8A-M6BSx38-P	100	M6	1/2	3	38	11/16
IL8A-M6Bx51-P	IL8A-M6BSx51-P	100	M6	1/2	3	51	11/16
IL8A-M8Bx38-P	IL8A-M8BSx38-P	500	M8	1/2	3	38	11/16
IL8A-M8Bx51-P	IL8A-M8BSx51-P	500	M8	1/2	3	51	11/16
IL8A-M8Bx62-P	IL8A-M8BSx62-P	500	M8	1/2	3	62	11/16
IL8A-M10Bx38-P	IL8A-M10BSx38-P	1000	M10	1/2	3	38	11/16
IL8A-M10Bx51-P	IL8A-M10BSx51-P	1000	M10	1/2	3	51	11/16
IL8A-M10Bx62-P	IL8A-M10BSx62-P	1000	M10	1/2	3	62	11/16
IL8A-M12Bx38-P	IL8A-M12BSx38-P	2000	M12	1/2	3	38	11/16
IL8A-M12Bx51-P	IL8A-M12BSx51-P	2000	M12	1/2	3	51	11/16
IL8A-M12Bx75-P	IL8A-M12BSx75-P	2000	M12	1/2	3	75	11/16
IL8A-M12Bx102-P	IL8A-M12BSx102-P	2000	M12	1/2	3	102	11/16
IL8A-M16Bx51-P	IL8A-M16BSx51-P	2500	M16	5/8	3	51	11/16
IL8A-M16Bx90-BR-P	IL8A-M16BSx90-BR-P	2500	M16	5/8	3	90	11/16
IL8A-M16Bx102-P	IL8A-M16BSx102-P	2500	M16	5/8	3	102	11/16
IL8A-M16Bx115-BR-P	IL8A-M16BSx115-BR-P	2500	M16	5/8	3	115	11/16



Rubber Pad Bottom View



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com & www.iec-corp.com

MEDIUM DUTY METRIC

KNOB STYLE GLIDES

KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel and Stainless Steel Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.



Top Hex (-HX)
and Slot (-SL)

(BOTTOM CHAMFER -
EASES SLIDING)



Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10

36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10