



NYLON SWIVEL SOCKET LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

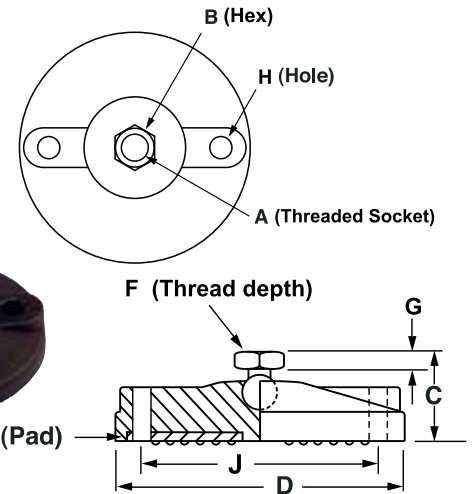

1-1/2" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL93-4G-P	IL93-4S-P	100	1/4-20	1/2	1	1 1/2	3/8	3/16	-	-
IL93-5G-P	IL93-5S-P	500	5/16-18	1/2	1	1 1/2	3/8	3/16	-	-
IL93-6G-P	IL93-6S-P	2000	3/8-16	1/2	1	1 1/2	3/8	3/16	-	-
IL93-7G-P	IL93-7S-P	2000	1/2-13	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-8G-P	IL93-8S-P	2000	5/8-11	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-9G-P	IL93-9S-P	2000	3/4-10	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-10G-P	IL93-10S-P	2000	1-8	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-4G-P	IL95-4S-P	100	1/4-20	1/2	1	2 3/8	3/8	3/16	-	-
IL95-5G-P	IL95-5S-P	500	5/16-18	1/2	1	2 3/8	3/8	3/16	-	-
IL95-6G-P	IL95-6S-P	2500	3/8-16	1/2	1	2 3/8	3/8	3/16	-	-
IL95-7G-P	IL95-7S-P	2500	1/2-13	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-8G-P	IL95-8S-P	2500	5/8-11	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-9G-P	IL95-9S-P	2500	3/4-10	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-10G-P	IL95-10S-P	2500	1-8	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-4G-H-P	IL97-4S-H-P	100	1/4-20	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-5G-H-P	IL97-5S-H-P	500	5/16-18	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-6G-H-P	IL97-6S-H-P	3000	3/8-16	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-7G-H-P	IL97-7S-H-P	3000	1/2-13	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-8G-H-P	IL97-8S-H-P	3000	5/8-11	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-9G-H-P	IL97-9S-H-P	3000	3/4-10	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-10G-H-P	IL97-10S-H-P	3000	1-8	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-4G-H-P	IL99-4S-H-P	100	1/4-20	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-5G-H-P	IL99-5S-H-P	500	5/16-18	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-6G-H-P	IL99-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-7G-H-P	IL99-7S-H-P	3000	1/2-13	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-8G-H-P	IL99-8S-H-P	3000	5/8-11	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-9G-H-P	IL99-9S-H-P	3000	3/4-10	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-10G-H-P	IL99-10S-H-P	3000	1-8	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-4G-H-P	IL99A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-5G-H-P	IL99A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-6G-H-P	IL99A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-7G-H-P	IL99A-7S-H-P	3000	1/2-13	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-8G-H-P	IL99A-8S-H-P	3000	5/8-11	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-9G-H-P	IL99A-9S-H-P	3000	3/4-10	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-10G-H-P	IL99A-10S-H-P	3000	1-8	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-4G-H-P	IL99B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-5G-H-P	IL99B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-6G-H-P	IL99B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-7G-H-P	IL99B-7S-H-P	3000	1/2-13	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-8G-H-P	IL99B-8S-H-P	3000	5/8-11	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-9G-H-P	IL99B-9S-H-P	3000	3/4-10	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-10G-H-P	IL99B-10S-H-P	3000	1-8	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL98C-9G-H-P	IL98C-9S-H-P	3000	3/4-10	1	1-7/8	10	5/8	11/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**METRIC SWIVEL SOCKET****NYLON SWIVEL METRIC SOCKET STYLE****LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

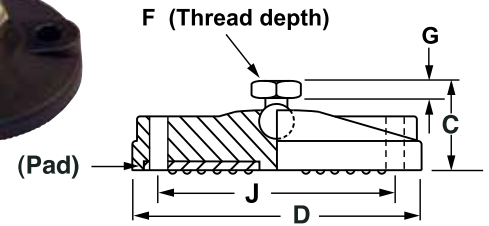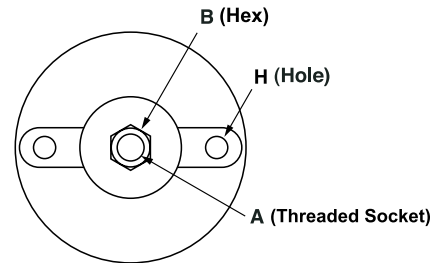**Metric Threads : 1-1/2" to 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers-with Rubber Pad										
IL93-M6G-P	IL93-M6S-P	100	M6X1	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M8G-P	IL93-M8S-P	500	M8X1.25	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M10G-P	IL93-M10S-P	2000	M10X1.50	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M12G-P	IL93-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-M16G-P	IL93-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-M20G-P	IL93-M20S-P	2000	M20X2.50	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-M24G-P	IL93-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-M6G-P	IL95-M6S-P	100	M6X1	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M8G-P	IL95-M8S-P	500	M8X1.25	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M10G-P	IL95-M10S-P	2500	M10X1.50	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M12G-P	IL95-M12S-P	2500	M12X1.75	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-M16G-P	IL95-M16S-P	2500	M16X2.00	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-M20G-P	IL95-M20S-P	2500	M20X2.50	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-M24G-P	IL95-M24S-P	2500	M24X3.00	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-M6G-H-P	IL97-M6S-H-P	100	M6X1	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M8G-H-P	IL97-M8S-H-P	500	M8X1.25	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M10G-H-P	IL97-M10S-H-P	3000	M10X1.50	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M12G-H-P	IL97-M12S-H-P	3000	M12X1.75	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-M16G-H-P	IL97-M16S-H-P	3000	M16X2.00	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-M20G-H-P	IL97-M20S-H-P	3000	M20X2.50	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-M24G-H-P	IL97-M24S-H-P	3000	M24X3.00	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-M6G-H-P	IL99-M6S-H-P	100	M6X1	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M8G-H-P	IL99-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M10G-H-P	IL99-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M12G-H-P	IL99-M12S-H-P	3000	M12X1.75	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-M16G-H-P	IL99-M16S-H-P	3000	M16X2.00	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-M20G-H-P	IL99-M20S-H-P	3000	M20X2.50	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-M24G-H-P	IL99-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-M6G-H-P	IL99A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M8G-H-P	IL99A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M10G-H-P	IL99A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M12G-H-P	IL99A-M12S-H-P	3000	M12X1.75	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-M16G-H-P	IL99A-M16S-H-P	3000	M16X2.00	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-M20G-H-P	IL99A-M20S-H-P	3000	M20X2.50	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-M24G-H-P	IL99A-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-M6G-H-P	IL99B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M8G-H-P	IL99B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M10G-H-P	IL99B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M12G-H-P	IL99B-M12S-H-P	3000	M12X1.75	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-M16G-H-P	IL99B-M16S-H-P	3000	M16X2.00	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-M20G-H-P	IL99B-M20S-H-P	3000	M20X2.50	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-M24G-H-P	IL99B-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL99C-M6G-H-P	IL99C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M8G-H-P	IL99C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M10G-H-P	IL99C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M12G-H-P	IL99C-M12S-H-P	3000	M12X1.75	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL99C-M16G-H-P	IL99C-M16S-H-P	3000	M16X2.00	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL99C-M20G-H-P	IL99C-M20S-H-P	3000	M20X2.50	1	1-7/8	10	5/8	11/16	.51	8.9
IL99C-M24G-H-P	IL99C-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P" To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

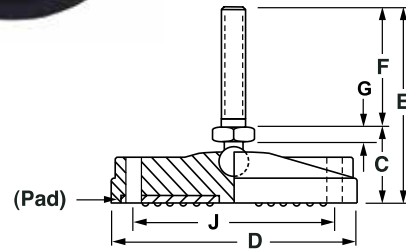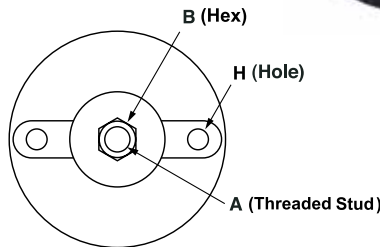**1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers--2" Stud and Rubber Pad											
IL92-4Gx1-P	IL92-4Sx1-P	100	1/4-20	1/2	1	1-1/2	2	1	3/16	-	-
IL92-4Gx15-P	IL92-4Sx15-P	100	1/4-20	1/2	1	1-1/2	2-1/2	1-1/2	3/16	-	-
IL92-4G-P	IL92-4S-P	100	1/4-20	1/2	1	1-1/2	3	2	3/16	-	-
IL92-5Gx1-P	IL92-5Sx1-P	500	5/16-18	1/2	1	1-1/2	2	1	3/16	-	-
IL92-5G-P	IL92-5S-P	500	5/16-18	1/2	1	1-1/2	3	2	3/16	-	-
IL92-6G-P	IL92-6S-P	2000	3/8-16	1/2	1	1-1/2	3	2	3/16	-	-
IL92-7G-P	IL92-7S-P	2000	1/2-13	1/2	1	1-1/2	3	2	3/16	-	-
IL92-8G-P	IL92-8S-P	2000	5/8-11	5/8	1	1-1/2	3	2	3/16	-	-
IL92-9G-P	IL92-9S-P	2000	3/4-10	3/4	1	1-1/2	3	2	3/16	-	-
IL92-10G-P	IL92-10S-P	2000	1-8	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL92-12G-P	IL92-12S-P	2000	1 1/4-7	1-1/4	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-4Gx1-P	IL94-4Sx1-P	100	1/4-20	1/2	1	2-3/8	2	1	3/16	-	-
IL94-4Gx15-P	IL94-4Sx15-P	100	1/4-20	1/2	1	2-3/8	2-1/2	1-1/2	3/16	-	-
IL94-4G-P	IL94-4S-P	100	1/4-20	1/2	1	2-3/8	3	2	3/16	-	-
IL94-5Gx1-P	IL94-5Sx1-P	500	5/16-18	1/2	1	2-3/8	2	1	3/16	-	-
IL94-5G-P	IL94-5S-P	500	5/16-18	1/2	1	2-3/8	3	2	3/16	-	-
IL94-6G-P	IL94-6S-P	2500	3/8-16	1/2	1	2-3/8	3	2	3/16	-	-
IL94-7G-P	IL94-7S-P	2500	1/2-13	1/2	1	2-3/8	3	2	3/16	-	-
IL94-8G-P	IL94-8S-P	2500	5/8-11	5/8	1	2-3/8	3	2	3/16	-	-
IL94-9G-P	IL94-9S-P	2500	3/4-10	3/4	1	2-3/8	3	2	3/16	-	-
IL94-10G-P	IL94-10S-P	2500	1-8	1	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL94-12G-P	IL94-12S-P	2500	1 1/4-7	1-1/4	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL96-4Gx1-H-P	IL96-4Sx1-H-P	100	1/4-20	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-4Gx15-P	IL96-4Sx15-P	100	1/4-20	1/2	1	3-1/8	2-1/2	1-1/2	3/16	.39	2.2
IL96-4G-H-P	IL96-4S-H-P	100	1/4-20	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-5Gx1-P	IL96-5Sx1-P	500	5/16-18	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-5G-H-P	IL96-5S-H-P	500	5/16-18	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-6G-H-P	IL96-6S-H-P	3000	3/8-16	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-7G-H-P	IL96-7S-H-P	3000	1/2-13	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-8G-H-P	IL96-8S-H-P	3000	5/8-11	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-9G-H-P	IL96-9S-H-P	3000	3/4-10	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-10G-H-P	IL96-10S-H-P	3000	1-8	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL96-12G-H-P	IL96-12S-H-P	3000	1 1/4-7	1-1/4	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL98-4Gx1-H-P	IL98-4Sx1-H-P	100	1/4-20	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-4Gx15-P	IL98-4Sx15-P	100	1/4-20	1/2	1-1/4	4	2-3/4	1-1/2	3/16	.51	2.9
IL98-4G-H-P	IL98-4S-H-P	100	1/4-20	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-5Gx1-P	IL98-5Sx1-P	500	5/16-18	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-5G-H-P	IL98-5S-H-P	500	5/16-18	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-6G-H-P	IL98-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-7G-H-P	IL98-7S-H-P	3000	1/2-13	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-8G-H-P	IL98-8S-H-P	3000	5/8-11	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-9G-H-P	IL98-9S-H-P	3000	3/4-10	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-10G-H-P	IL98-10S-H-P	3000	1-8	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98-12G-H-P	IL98-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	4	3-1/2	2	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

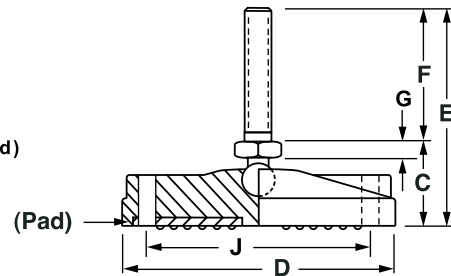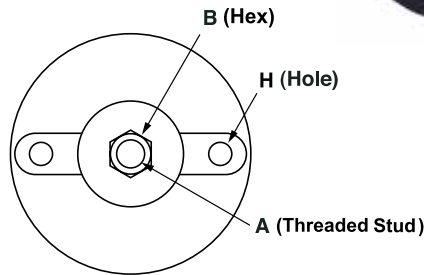**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98A-4Gx1-H-P	IL98A-4Sx1-H-P	100	1/4-20	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-4Gx15-P	IL98A-4Sx15-P	100	1/4-20	1/2	1-1/4	6	2-3/4	1-1/2	3/16	.51	4.9
IL98A-4G-H-P	IL98A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-5Gx1-P	IL98A-5Sx1-P	500	5/16-18	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-5G-H-P	IL98A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-6G-H-P	IL98A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-7G-H-P	IL98A-7S-H-P	3000	1/2-13	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-8G-H-P	IL98A-8S-H-P	3000	5/8-11	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-9G-H-P	IL98A-9S-H-P	3000	3/4-10	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-10G-H-P	IL98A-10S-H-P	3000	1-8	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98A-12G-H-P	IL98A-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-4Gx1-H-P	IL98B-4Sx1-H-P	100	1/4-20	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-4Gx15-P	IL98B-4Sx15-P	100	1/4-20	1/2	1-1/4	8	2-3/4	1-1/2	3/16	.51	6.9
IL98B-4G-H-P	IL98B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-5Gx1-P	IL98B-5Sx1-P	500	5/16-18	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-5G-H-P	IL98B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-6G-H-P	IL98B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-7G-H-P	IL98B-7S-H-P	3000	1/2-13	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-8G-H-P	IL98B-8S-H-P	3000	5/8-11	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-9G-H-P	IL98B-9S-H-P	3000	3/4-10	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-10G-H-P	IL98B-10S-H-P	3000	1-8	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98B-12G-H-P	IL98B-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-4Gx1-H-P	IL98C-4Sx1-H-P	100	1/4-20	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-4Gx15-P	IL98C-4Sx15-P	100	1/4-20	1/2	1-1/4	10	3-1/4	1-1/2	3/16	.51	8.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-5Gx1-P	IL98C-5Sx1-P	500	5/16-18	1/2	1-1/4	10	1-1/4	1	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98B-9G-H-P	IL98C-9S-H-P	3000	3/4-10	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1	1-1/2	10	3-1/2	2	7/16	.51	8.9
IL98C-12G-H-P	IL98C-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	10	3-1/2	2	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P". To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 3 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

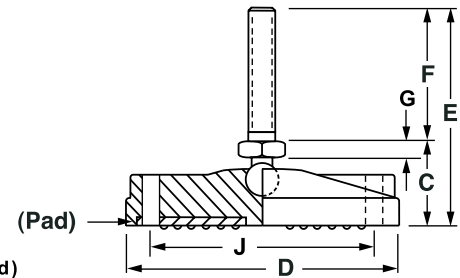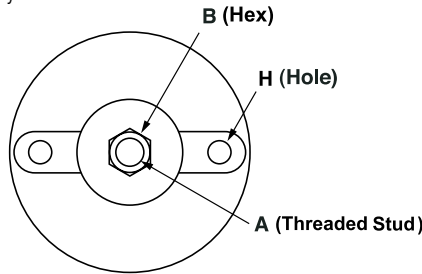**1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL92-4GX3-P	IL92-4SX3-P	100	1/4-20	1/2	1	1 1/2	4	3	3/16	-	-
IL92-5GX3-P	IL92-5SX3-P	500	5/16-18	1/2	1	1 1/2	4	3	3/16	-	-
IL92-6GX3-P	IL92-6SX3-P	2000	3/8-16	1/2	1	1 1/2	4	3	3/16	-	-
IL92-7GX3-P	IL92-7SX3-P	2000	1/2-13	1/2	1	1 1/2	4	3	3/16	-	-
IL92-8GX3-P	IL92-8SX3-P	2000	5/8-11	5/8	1	1 1/2	4	3	3/16	-	-
IL92-9GX3-P	IL92-9SX3-P	2000	3/4-10	3/4	1	1 1/2	4	3	3/16	-	-
IL92-10GX3-P	IL92-10SX3-P	2000	1-8	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL92-12GX3-P	IL92-12SX3-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-4GX3-P	IL94-4SX3-P	100	1/4-20	1/2	1	2 3/8	4	3	3/16	-	-
IL94-5GX3-P	IL94-5SX3-P	500	5/16-18	1/2	1	2 3/8	4	3	3/16	-	-
IL94-6GX3-P	IL94-6SX3-P	2500	3/8-16	1/2	1	2 3/8	4	3	3/16	-	-
IL94-7GX3-P	IL94-7SX3-P	2500	1/2-13	1/2	1	2 3/8	4	3	3/16	-	-
IL94-8GX3-P	IL94-8SX3-P	2500	5/8-11	5/8	1	2 3/8	4	3	3/16	-	-
IL94-9GX3-P	IL94-9SX3-P	2500	3/4-10	3/4	1	2 3/8	4	3	3/16	-	-
IL94-10GX3-P	IL94-10SX3-P	2500	1-8	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL94-12GX3-P	IL94-12SX3-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-4GX3-H-P	IL96-4SX3-H-P	100	1/4-20	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-5GX3-H-P	IL96-5SX3-H-P	500	5/16-18	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-6GX3-H-P	IL96-6SX3-H-P	3000	3/8-16	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-7GX3-H-P	IL96-7SX3-H-P	3000	1/2-13	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-8GX3-H-P	IL96-8SX3-H-P	3000	5/8-11	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-9GX3-H-P	IL96-9SX3-H-P	3000	3/4-10	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-10GX3-H-P	IL96-10SX3-H-P	3000	1-8	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL96-12GX3-H-P	IL96-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL98-4GX3-H-P	IL98-4SX3-H-P	100	1/4-20	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-5GX3-H-P	IL98-5SX3-H-P	500	5/16-18	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-6GX3-H-P	IL98-6SX3-H-P	3000	3/8-16	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-7GX3-H-P	IL98-7SX3-H-P	3000	1/2-13	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-8GX3-H-P	IL98-8SX3-H-P	3000	5/8-11	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-9GX3-H-P	IL98-9SX3-H-P	3000	3/4-10	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-10GX3-H-P	IL98-10SX3-H-P	3000	1-8	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98-12GX3-H-P	IL98-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	4 1/2	3	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 3 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

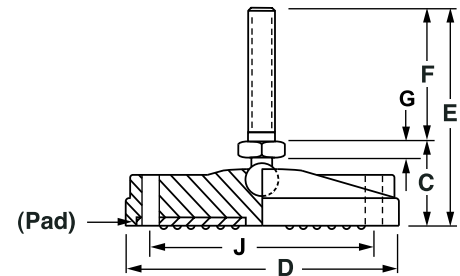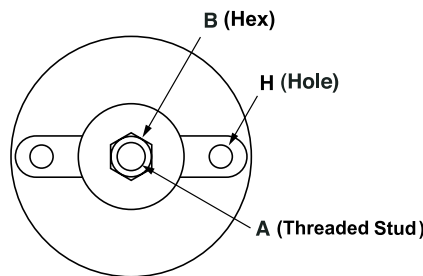

6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98A-4GX3-H-P	IL98A-4SX3-H-P	100	1/4-20	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-5GX3-H-P	IL98A-5SX3-H-P	500	5/16-18	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-6GX3-H-P	IL98A-6SX3-H-P	3000	3/8-16	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-7GX3-H-P	IL98A-7SX3-H-P	3000	1/2-13	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-8GX3-H-P	IL98A-8SX3-H-P	3000	5/8-11	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-9GX3-H-P	IL98A-9SX3-H-P	3000	3/4-10	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-10GX3-H-P	IL98A-10SX3-H-P	3000	1-8	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98A-12GX3-H-P	IL98A-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-4GX3-H-P	IL98B-4SX3-H-P	100	1/4-20	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-5GX3-H-P	IL98B-5SX3-H-P	500	5/16-18	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-6GX3-H-P	IL98B-6SX3-H-P	3000	3/8-16	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-7GX3-H-P	IL98B-7SX3-H-P	3000	1/2-13	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-8GX3-H-P	IL98B-8SX3-H-P	3000	5/8-11	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-9GX3-H-P	IL98B-9SX3-H-P	3000	3/4-10	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-10GX3-H-P	IL98B-10SX3-H-P	3000	1-8	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98B-12GX3-H-P	IL98B-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-4GX3-H-P	IL98C-4SX3-H-P	100	1/4-20	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-5GX3-H-P	IL98C-5SX3-H-P	500	5/16-18	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-6GX3-H-P	IL98C-6SX3-H-P	3000	3/8-16	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-7GX3-H-P	IL98C-7SX3-H-P	3000	1/2-13	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-8GX3-H-P	IL98C-8SX3-H-P	3000	5/8-11	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-9GX3-H-P	IL98C-9SX3-H-P	3000	3/4-10	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-10GX3-H-P	IL98C-10SX3-H-P	3000	1-8	1	1 1/2	10	4 1/2	3	7/16	.51	8.9
IL98C-12GX3-H-P	IL98C-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 4 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

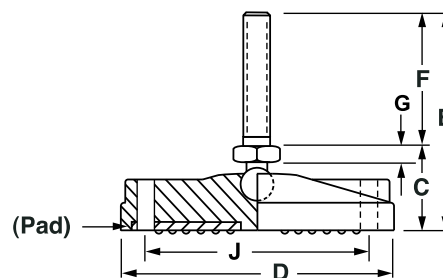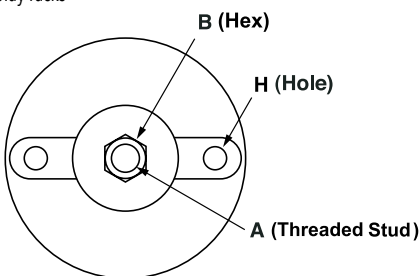

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL92-5GX4-P	IL92-5SX4-P	500	5/16-18	1/2	1	1 1/2	5	4	3/16	-	-
IL92-6GX4-P	IL92-6SX4-P	2000	3/8-16	1/2	1	1 1/2	5	4	3/16	-	-
IL92-7GX4-P	IL92-7SX4-P	2000	1/2-13	1/2	1	1 1/2	5	4	3/16	-	-
IL92-8GX4-P	IL92-8SX4-P	2000	5/8-11	5/8	1	1 1/2	5	4	3/16	-	-
IL92-9GX4-P	IL92-9SX4-P	2000	3/4-10	3/4	1	1 1/2	5	4	3/16	-	-
IL92-10GX4-P	IL92-10SX4-P	2000	1-8	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL92-12GX4-P	IL92-12SX4-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-5GX4-P	IL94-5SX4-P	500	5/16-18	1/2	1	2 3/8	5	4	3/16	-	-
IL94-6GX4-P	IL94-6SX4-P	2500	3/8-16	1/2	1	2 3/8	5	4	3/16	-	-
IL94-7GX4-P	IL94-7SX4-P	2500	1/2-13	1/2	1	2 3/8	5	4	3/16	-	-
IL94-8GX4-P	IL94-8SX4-P	2500	5/8-11	5/8	1	2 3/8	5	4	3/16	-	-
IL94-9GX4-P	IL94-9SX4-P	2500	3/4-10	3/4	1	2 3/8	5	4	3/16	-	-
IL94-10GX4-P	IL94-10SX4-P	2500	1-8	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL94-12GX4-P	IL94-12SX4-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-5GX4-H-P	IL96-5SX4-H-P	500	5/16-18	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-6GX4-H-P	IL96-6SX4-H-P	3000	3/8-16	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-7GX4-H-P	IL96-7SX4-H-P	3000	1/2-13	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-8GX4-H-P	IL96-8SX4-H-P	3000	5/8-11	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-9GX4-H-P	IL96-9SX4-H-P	3000	3/4-10	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-10GX4-H-P	IL96-10SX4-H-P	3000	1-8	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL96-12GX4-H-P	IL96-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL98-5GX4-H-P	IL98-5SX4-H-P	500	5/16-18	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-6GX4-H-P	IL98-6SX4-H-P	3000	3/8-16	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-7GX4-H-P	IL98-7SX4-H-P	3000	1/2-13	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-8GX4-H-P	IL98-8SX4-H-P	3000	5/8-11	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-9GX4-H-P	IL98-9SX4-H-P	3000	3/4-10	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-10GX4-H-P	IL98-10SX4-H-P	3000	1-8	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98-12GX4-H-P	IL98-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	5 1/2	4	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 4 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

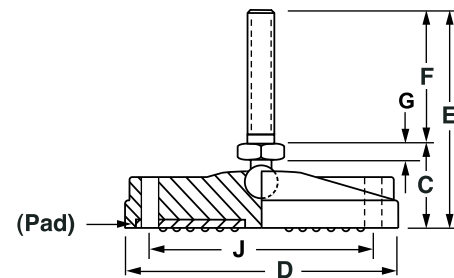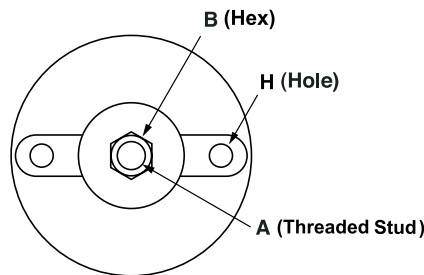**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98A-5GX4-H-P	IL98A-5SX4-H-P	500	5/16-18	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-6GX4-H-P	IL98A-6SX4-H-P	3000	3/8-16	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-7GX4-H-P	IL98A-7SX4-H-P	3000	1/2-13	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-8GX4-H-P	IL98A-8SX4-H-P	3000	5/8-11	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-9GX4-H-P	IL98A-9SX4-H-P	3000	3/4-10	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-10GX4-H-P	IL98A-10SX4-H-P	3000	1-8	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98A-12GX4-H-P	IL98A-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-5GX4-H-P	IL98B-5SX4-H-P	500	5/16-18	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-6GX4-H-P	IL98B-6SX4-H-P	3000	3/8-16	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-7GX4-H-P	IL98B-7SX4-H-P	3000	1/2-13	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-8GX4-H-P	IL98B-8SX4-H-P	3000	5/8-11	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-9GX4-H-P	IL98B-9SX4-H-P	3000	3/4-10	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-10GX4-H-P	IL98B-10SX4-H-P	3000	1-8	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98B-12GX4-H-P	IL98B-12SX4-H-P	7500	1 1/4-7	1 1/4	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-5GX4-H-P	IL98C-5SX4-H-P	500	5/16-18	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-6GX4-H-P	IL98C-6SX4-H-P	3000	3/8-16	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-7GX4-H-P	IL98C-7SX4-H-P	3000	1/2-13	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-8GX4-H-P	IL98C-8SX4-H-P	3000	5/8-11	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-9GX4-H-P	IL98C-9SX4-H-P	3000	3/4-10	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-10GX4-H-P	IL98C-10SX4-H-P	3000	1-8	1	1 1/2	10	5 1/2	4	7/16	.51	8.9
IL98C-12GX4-H-P	IL98C-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	5 1/2	4	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 5 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

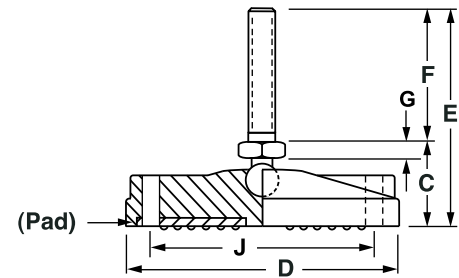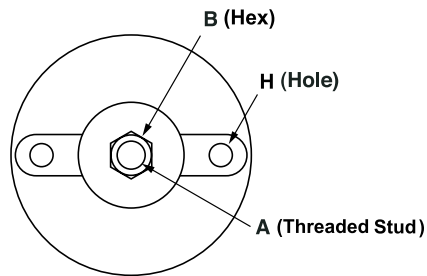

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—5" Stud and Rubber Pad											
IL92-6GX5-P	IL92-6SX5-P	2000	3/8-16	1/2	1	1 1/2	6	5	3/16	-	-
IL92-7GX5-P	IL92-7SX5-P	2000	1/2-13	1/2	1	1 1/2	6	5	3/16	-	-
IL92-8GX5-P	IL92-8SX5-P	2000	5/8-11	5/8	1	1 1/2	6	5	3/16	-	-
IL92-9GX5-P	IL92-9SX5-P	2000	3/4-10	3/4	1	1 1/2	6	5	3/16	-	-
IL92-10GX5-P	IL92-10SX5-P	2000	1-8	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL92-12GX5-P	IL92-12SX5-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-6GX5-P	IL94-6SX5-P	2500	3/8-16	1/2	1	2 3/8	6	5	3/16	-	-
IL94-7GX5-P	IL94-7SX5-P	2500	1/2-13	1/2	1	2 3/8	6	5	3/16	-	-
IL94-8GX5-P	IL94-8SX5-P	2500	5/8-11	5/8	1	2 3/8	6	5	3/16	-	-
IL94-9GX5-P	IL94-9SX5-P	2500	3/4-10	3/4	1	2 3/8	6	5	3/16	-	-
IL94-10GX5-P	IL94-10SX5-P	2500	1-8	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL94-12GX5-P	IL94-12SX5-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-6GX5-H-P	IL96-6SX5-H-P	3000	3/8-16	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-7GX5-H-P	IL96-7SX5-H-P	3000	1/2-13	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-8GX5-H-P	IL96-8SX5-H-P	3000	5/8-11	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-9GX5-H-P	IL96-9SX5-H-P	3000	3/4-10	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-10GX5-H-P	IL96-10SX5-H-P	3000	1-8	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL96-12GX5-H-P	IL96-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL98-6GX5-H-P	IL98-6SX5-H-P	3000	3/8-16	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-7GX5-H-P	IL98-7SX5-H-P	3000	1/2-13	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-8GX5-H-P	IL98-8SX5-H-P	3000	5/8-11	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-9GX5-H-P	IL98-9SX5-H-P	3000	3/4-10	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-10GX5-H-P	IL98-10SX5-H-P	3000	1-8	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98-12GX5-H-P	IL98-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	6 1/2	5	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



NYLON SWIVEL STUD LEVELERS – with Rubber Pad




The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

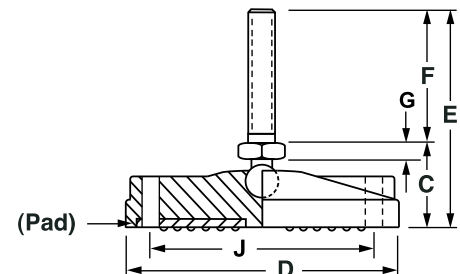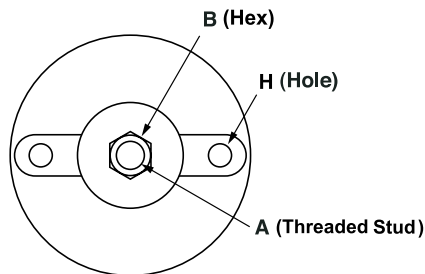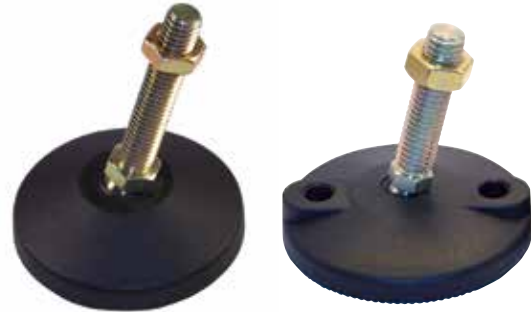

6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98A-6GX5-H-P	IL98A-6SX5-H-P	3000	3/8-16	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-7GX5-H-P	IL98A-7SX5-H-P	3000	1/2-13	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-8GX5-H-P	IL98A-8SX5-H-P	3000	5/8-11	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-9GX5-H-P	IL98A-9SX5-H-P	3000	3/4-10	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-10GX5-H-P	IL98A-10SX5-H-P	3000	1-8	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98A-12GX5-H-P	IL98A-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-6GX5-H-P	IL98B-6SX5-H-P	3000	3/8-16	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-7GX5-H-P	IL98B-7SX5-H-P	3000	1/2-13	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-8GX5-H-P	IL98B-8SX5-H-P	3000	5/8-11	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-9GX5-H-P	IL98B-9SX5-H-P	3000	3/4-10	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-10GX5-H-P	IL98B-10SX5-H-P	3000	1-8	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98B-12GX5-H-P	IL98B-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-6GX5-H-P	IL98C-6SX5-H-P	3000	3/8-16	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-7GX5-H-P	IL98C-7SX5-H-P	3000	1/2-13	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-8GX5-H-P	IL98C-8SX5-H-P	3000	5/8-11	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-9GX5-H-P	IL98C-9SX5-H-P	3000	3/4-10	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-10GX5-H-P	IL98C-10SX5-H-P	3000	1-8	1	1 1/2	10	6 1/2	5	7/16	.51	8.9
IL98C-12GX5-H-P	IL98C-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 6 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

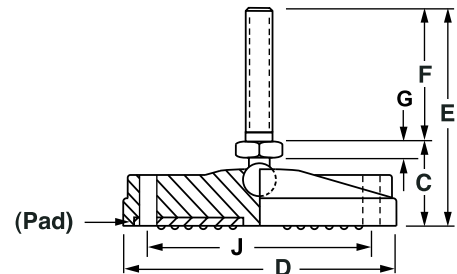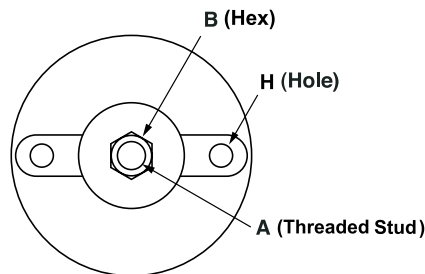**1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL92-6GX6-P	IL92-6SX6-P	2000	3/8-16	1/2	1	1 1/2	7	6	3/16	-	-
IL92-7GX6-P	IL92-7SX6-P	2000	1/2-13	1/2	1	1 1/2	7	6	3/16	-	-
IL92-8GX6-P	IL92-8SX6-P	2000	5/8-11	5/8	1	1 1/2	7	6	3/16	-	-
IL92-9GX6-P	IL92-9SX6-P	2000	3/4-10	3/4	1	1 1/2	7	6	3/16	-	-
IL92-10GX6-P	IL92-10SX6-P	2000	1-8	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL92-12GX6-P	IL92-12SX6-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-6GX6-P	IL94-6SX6-P	2500	3/8-16	1/2	1	2 3/8	7	6	3/16	-	-
IL94-7GX6-P	IL94-7SX6-P	2500	1/2-13	1/2	1	2 3/8	7	6	3/16	-	-
IL94-8GX6-P	IL94-8SX6-P	2500	5/8-11	5/8	1	2 3/8	7	6	3/16	-	-
IL94-9GX6-P	IL94-9SX6-P	2500	3/4-10	3/4	1	2 3/8	7	6	3/16	-	-
IL94-10GX6-P	IL94-10SX6-P	2500	1-8	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL94-12GX6-P	IL94-12SX6-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-6GX6-H-P	IL96-6SX6-H-P	3000	3/8-16	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-7GX6-H-P	IL96-7SX6-H-P	3000	1/2-13	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-8GX6-H-P	IL96-8SX6-H-P	3000	5/8-11	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-9GX6-H-P	IL96-9SX6-H-P	3000	3/4-10	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-10GX6-H-P	IL96-10SX6-H-P	3000	1-8	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL96-12GX6-H-P	IL96-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL98-6GX6-H-P	IL98-6SX6-H-P	3000	3/8-16	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-7GX6-H-P	IL98-7SX6-H-P	3000	1/2-13	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-8GX6-H-P	IL98-8SX6-H-P	3000	5/8-11	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-9GX6-H-P	IL98-9SX6-H-P	3000	3/4-10	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-10GX6-H-P	IL98-10SX6-H-P	3000	1-8	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98-12GX6-H-P	IL98-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	7 1/2	6	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 6 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

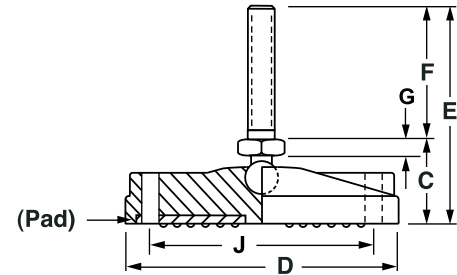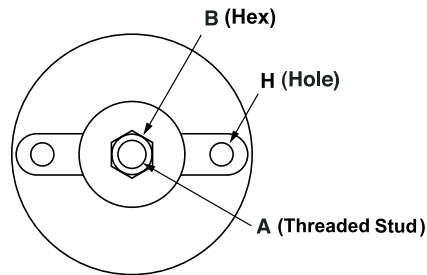**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—6" Stud and Rubber Pad											
IL98A-6GX6-H-P	IL98A-6SX6-H-P	3000	3/8-16	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-7GX6-H-P	IL98A-7SX6-H-P	3000	1/2-13	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-8GX6-H-P	IL98A-8SX6-H-P	3000	5/8-11	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-9GX6-H-P	IL98A-9SX6-H-P	3000	3/4-10	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-10GX6-H-P	IL98A-10SX6-H-P	3000	1-8	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98A-12GX6-H-P	IL98A-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-6GX6-H-P	IL98B-6SX6-H-P	3000	3/8-16	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-7GX6-H-P	IL98B-7SX6-H-P	3000	1/2-13	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-8GX6-H-P	IL98B-8SX6-H-P	3000	5/8-11	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-9GX6-H-P	IL98B-9SX6-H-P	3000	3/4-10	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-10GX6-H-P	IL98B-10SX6-H-P	3000	1-8	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98B-12GX6-H-P	IL98B-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-6GX6-H-P	IL98C-6SX6-H-P	3000	3/8-16	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-7GX6-H-P	IL98C-7SX6-H-P	3000	1/2-13	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-8GX6-H-P	IL98C-8SX6-H-P	3000	5/8-11	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-9GX6-H-P	IL98C-9SX6-H-P	3000	3/4-10	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-10GX6-H-P	IL98C-10SX6-H-P	3000	1-8	1	1 1/2	10	7 1/2	6	7/16	.51	8.9
IL98C-12GX6-H-P	IL98C-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	7 1/2	6	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 8 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

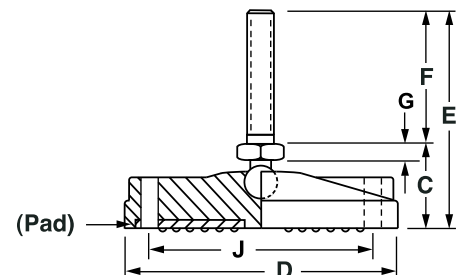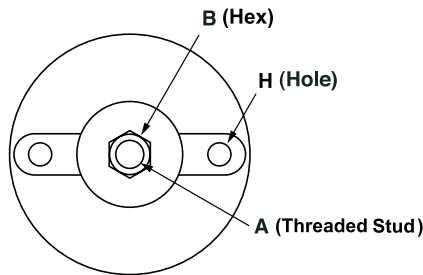

1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL92-7GX8-P	IL92-7SX8-P	2000	1/2-13	1/2	1	1 1/2	9	8	3/16	-	-
IL92-8GX8-P	IL92-8SX8-P	2000	5/8-11	5/8	1	1 1/2	9	8	3/16	-	-
IL92-9GX8-P	IL92-9SX8-P	2000	3/4-10	3/4	1	1 1/2	9	8	3/16	-	-
IL92-10GX8-P	IL92-10SX8-P	2000	1-8	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL92-12GX8-P	IL92-12SX8-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-7GX8-P	IL94-7SX8-P	2500	1/2-13	1/2	1	2 3/8	9	8	3/16	-	-
IL94-8GX8-P	IL94-8SX8-P	2500	5/8-11	5/8	1	2 3/8	9	8	3/16	-	-
IL94-9GX8-P	IL94-9SX8-P	2500	3/4-10	3/4	1	2 3/8	9	8	3/16	-	-
IL94-10GX8-P	IL94-10SX8-P	2500	1-8	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL94-12GX8-P	IL94-12SX8-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-7GX8-H-P	IL96-7SX8-H-P	3000	1/2-13	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-8GX8-H-P	IL96-8SX8-H-P	3000	5/8-11	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-9GX8-H-P	IL96-9SX8-H-P	3000	3/4-10	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-10GX8-H-P	IL96-10SX8-H-P	3000	1-8	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL96-12GX8-H-P	IL96-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL98-7GX8-H-P	IL98-7SX8-H-P	3000	1/2-13	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-8GX8-H-P	IL98-8SX8-H-P	3000	5/8-11	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-9GX8-H-P	IL98-9SX8-H-P	3000	3/4-10	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-10GX8-H-P	IL98-10SX8-H-P	3000	1-8	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98-12GX8-H-P	IL98-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	9 1/2	8	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 8 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

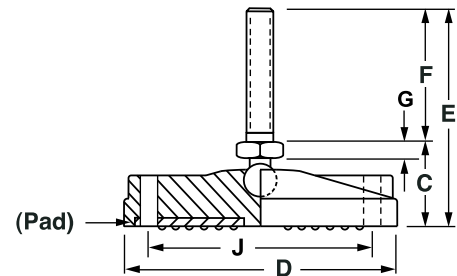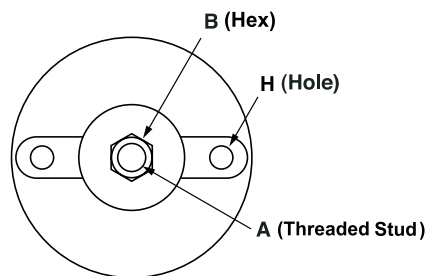**6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL98A-7GX8-H-P	IL98A-7SX8-H-P	3000	1/2-13	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-8GX8-H-P	IL98A-8SX8-H-P	3000	5/8-11	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-9GX8-H-P	IL98A-9SX8-H-P	3000	3/4-10	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-10GX8-H-P	IL98A-10SX8-H-P	3000	1-8	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98A-12GX8-H-P	IL98A-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-7GX8-H-P	IL98B-7SX8-H-P	3000	1/2-13	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-8GX8-H-P	IL98B-8SX8-H-P	3000	5/8-11	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-9GX8-H-P	IL98B-9SX8-H-P	3000	3/4-10	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-10GX8-H-P	IL98B-10SX8-H-P	3000	1-8	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98B-12GX8-H-P	IL98B-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-7GX8-H-P	IL98C-7SX8-H-P	3000	1/2-13	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-8GX8-H-P	IL98C-8SX8-H-P	3000	5/8-11	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-9GX8-H-P	IL98C-9SX8-H-P	3000	3/4-10	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-10GX8-H-P	IL98C-10SX8-H-P	3000	1-8	1	1 1/2	10	9 1/2	8	7/16	.51	8.9
IL98C-12GX8-H-P	IL98C-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL****METRIC - 1" & 2" STUD****NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

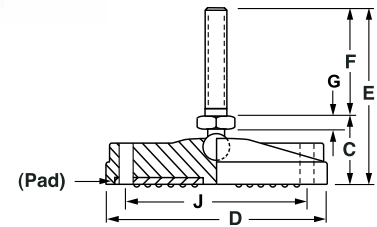**Metric Threads: 1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL92-M6Gx1-P	IL92-M6Sx1-P	100	M6X1	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M8Gx1-P	IL92-M8Sx1-P	500	M8X1.25	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M6G-P	IL92-M6S-P	100	M6X1	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M8G-P	IL92-M8S-P	500	M8X1.25	1/2	1	1-1/2	2	2	3/16	-	-
IL92-M10G-P	IL92-M10S-P	2000	M10X1.50	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M12G-P	IL92-M12S-P	2000	M12X1.75	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M16G-P	IL92-M16S-P	2000	M16X2.00	5/8	1	1-1/2	3	2	3/16	-	-
IL92-M20G-P	IL92-M20S-P	2000	M20X2.50	3/4	1	1-1/2	3	2	3/16	-	-
IL92-M24G-P	IL92-M24S-P	2000	M24X3.00	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-M6Gx1-P	IL94-M6Sx1-P	100	M6X1	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M8Gx1-P	IL94-M8Sx1-P	500	M8X1.25	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M6G-P	IL94-M6S-P	100	M6X1	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M8G-P	IL94-M8S-P	500	M8X1.25	1/2	1	2-3/8	2	2	3/16	-	-
IL94-M10G-P	IL94-M10S-P	2500	M10X1.50	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M12G-P	IL94-M12S-P	2500	M12X1.75	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M16G-P	IL94-M16S-P	2500	M16X2.00	5/8	1	2-3/8	3	2	3/16	-	-
IL94-M20G-P	IL94-M20S-P	2500	M20X2.50	3/4	1	2-3/8	3	2	3/16	-	-
IL94-M24G-P	IL94-M24S-P	2500	M24X3.00	1	1-1/4	2-3/8	3-1/4	2	7/16	-	-
IL96-M6Gx1-H-P	IL96-M6Sx1-H-P	100	M6X1	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M8Gx1-H-P	IL96-M8Sx1-H-P	500	M8X1.25	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M6G-H-P	IL96-M6S-H-P	100	M6X1	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M8G-H-P	IL96-M8S-H-P	500	M8X1.25	1/2	1	3-1/8	2	2	3/16	.39	2.2
IL96-M10G-H-P	IL96-M10S-H-P	3000	M10X1.50	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M12G-H-P	IL96-M12S-H-P	3000	M12X1.75	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M16G-H-P	IL96-M16S-H-P	3000	M16X2.00	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-M20G-H-P	IL96-M20S-H-P	3000	M20X2.50	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-M24G-H-P	IL96-M24S-H-P	3000	M24X3.00	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL98-M6Gx1-H-P	IL98-M6Sx1-H-P	100	M6X1	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M8Gx1-H-P	IL98-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M6G-H-P	IL98-M6S-H-P	100	M6X1	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M8G-H-P	IL98-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	2	3/16	.51	2.9
IL98-M10G-H-P	IL98-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M12G-H-P	IL98-M12S-H-P	3000	M12X1.75	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M16G-H-P	IL98-M16S-H-P	3000	M16X2.00	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M20G-H-P	IL98-M20S-H-P	3000	M20X2.50	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M24G-H-P	IL98-M24S-H-P	3000	M24X3.00	1	1-1/2	4	3-1/2	2	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size						
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL****METRIC - 1" & 2" STUD****NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

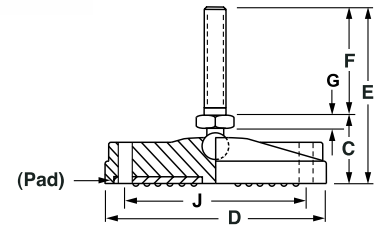**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98A-M6Gx1-H-P	IL98A-M6Sx1-H-P	100	M6X1	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M8Gx1-H-P	IL98A-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M6G-H-P	IL98A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M8G-H-P	IL98A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M10G-H-P	IL98A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M12G-H-P	IL98A-M12S-H-P	3000	M12X1.75	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M16G-H-P	IL98A-M16S-H-P	3000	M16X2.00	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M20G-H-P	IL98A-M20S-H-P	3000	M20X2.50	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M24G-H-P	IL98A-M24S-H-P	3000	M24X3.00	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-M6Gx1-H-P	IL98B-M6Sx1-H-P	100	M6X1	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M8Gx1-H-P	IL98B-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M6G-H-P	IL98B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M8G-H-P	IL98B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M10G-H-P	IL98B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M12G-H-P	IL98B-M12S-H-P	3000	M12X1.75	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M16G-H-P	IL98B-M16S-H-P	3000	M16X2.00	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M20G-H-P	IL98B-M20S-H-P	3000	M20X2.50	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M24G-H-P	IL98B-M24S-H-P	3000	M24X3.00	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-M6Gx1-H-P	IL98C-M6Sx1-H-P	100	M6X1	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M8Gx1-H-P	IL98C-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M6G-H-P	IL98C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M8G-H-P	IL98C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M10G-H-P	IL98C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M12G-H-P	IL98C-M12S-H-P	3000	M12X1.75	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M16G-H-P	IL98C-M16S-H-P	3000	M16X2.00	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M20G-H-P	IL98C-M20S-H-P	3000	M20X2.50	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M24G-H-P	IL98C-M24S-H-P	3000	M24X3.00	1	1-1/2	10	3-1/2	2	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

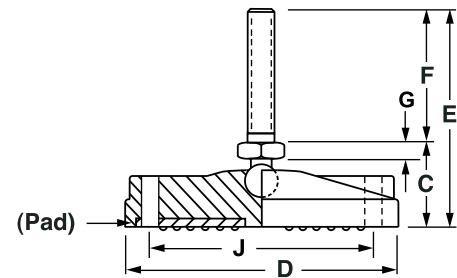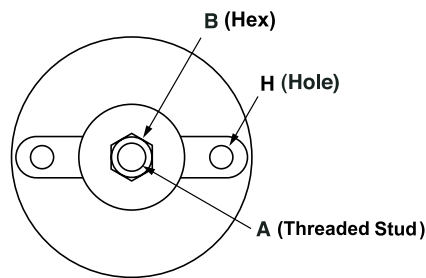**Metric Threads: 1-1/2" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL92-M6GX3-P	IL92-M6SX3-P	100	M6X1	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M8GX3-P	IL92-M8SX3-P	500	M8X1.25	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M10GX3-P	IL92-M10SX3-P	2000	M10X1.50	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M12GX3-P	IL92-M12SX3-P	2000	M12X1.75	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M16GX3-P	IL92-M16SX3-P	2000	M16X2.00	5/8	1	1 1/2	4	3	3/16	-	-
IL92-M20GX3-P	IL92-M20SX3-P	2000	M20X2.50	3/4	1	1 1/2	4	3	3/16	-	-
IL92-M24GX3-P	IL92-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-M6GX3-P	IL94-M6SX3-P	100	M6X1	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M8GX3-P	IL94-M8SX3-P	500	M8X1.25	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M10GX3-P	IL94-M10SX3-P	2500	M10X1.50	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M12GX3-P	IL94-M12SX3-P	2500	M12X1.75	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M16GX3-P	IL94-M16SX3-P	2500	M16X2.00	5/8	1	2 3/8	4	3	3/16	-	-
IL94-M20GX3-P	IL94-M20SX3-P	2500	M20X2.50	3/4	1	2 3/8	4	3	3/16	-	-
IL94-M24GX3-P	IL94-M24SX3-P	2500	M24X3.00	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-M6GX3-H-P	IL96-M6SX3-H-P	100	M6X1	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M8GX3-H-P	IL96-M8SX3-H-P	500	M8X1.25	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M10GX3-H-P	IL96-M10SX3-H-P	3000	M10X1.50	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M12GX3-H-P	IL96-M12SX3-H-P	3000	M12X1.75	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M16GX3-H-P	IL96-M16SX3-H-P	3000	M16X2.00	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-M20GX3-H-P	IL96-M20SX3-H-P	3000	M20X2.50	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-M24GX3-H-P	IL96-M24SX3-H-P	3000	M24X3.00	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL98-M6GX3-H-P	IL98-M6SX3-H-P	100	M6X1	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M8GX3-H-P	IL98-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M10GX3-H-P	IL98-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M12GX3-H-P	IL98-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M16GX3-H-P	IL98-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M20GX3-H-P	IL98-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M24GX3-H-P	IL98-M24SX3-H-P	3000	M24X3.00	1	1 1/2	4	4 1/2	3	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

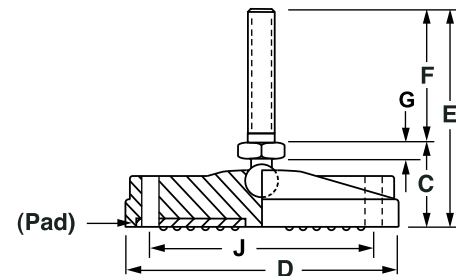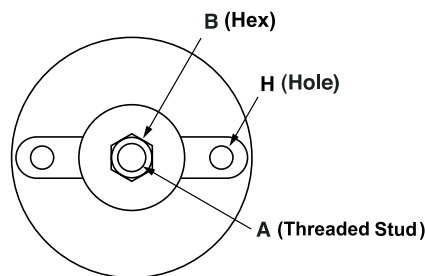**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98A-M6GX3-H-P	IL98A-M6SX3-H-P	100	M6X1	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M8GX3-H-P	IL98A-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M10GX3-H-P	IL98A-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M12GX3-H-P	IL98A-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M16GX3-H-P	IL98A-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M20GX3-H-P	IL98A-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M24GX3-H-P	IL98A-M24SX3-H-P	3000	M24X3.00	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-M6GX3-H-P	IL98B-M6SX3-H-P	100	M6X1	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M8GX3-H-P	IL98B-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M10GX3-H-P	IL98B-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M12GX3-H-P	IL98B-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M16GX3-H-P	IL98B-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M20GX3-H-P	IL98B-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M24GX3-H-P	IL98B-M24SX3-H-P	3000	M24X3.00	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-M6GX3-H-P	IL98C-M6SX3-H-P	100	M6X1	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M8GX3-H-P	IL98C-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M10GX3-H-P	IL98C-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M12GX3-H-P	IL98C-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M16GX3-H-P	IL98C-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M20GX3-H-P	IL98C-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M24GX3-H-P	IL98C-M24SX3-H-P	3000	M24X3.00	1	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

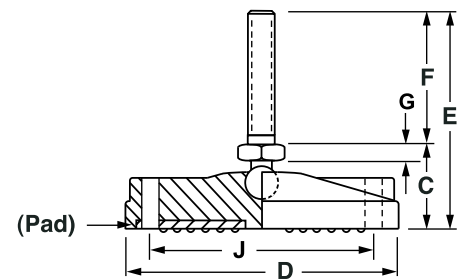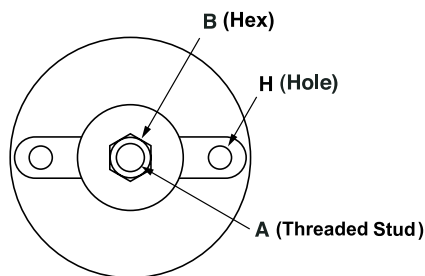

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL92-M8GX4-P	IL92-M8SX4-P	500	M8X1.25	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M10GX4-P	IL92-M10SX4-P	2000	M10X1.50	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M12GX4-P	IL92-M12SX4-P	2000	M12X1.75	5/8	1	1 1/2	5	4	3/16	-	-
IL92-M16GX4-P	IL92-M16SX4-P	2000	M16X2.00	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M20GX4-P	IL92-M20SX4-P	2000	M20X2.50	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M24GX4-P	IL92-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-M8GX4-P	IL94-M8SX4-P	500	M8X1.25	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M10GX4-P	IL94-M10SX4-P	2500	M10X1.50	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M12GX4-P	IL94-M12SX4-P	2500	M12X1.75	5/8	1	2 3/8	5	4	3/16	-	-
IL94-M16GX4-P	IL94-M16SX4-P	2500	M16X2.00	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M20GX4-P	IL94-M20SX4-P	2500	M20X2.50	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M24GX4-P	IL94-M24SX4-P	2500	M24X3.00	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-M8GX4-H-P	IL96-M8SX4-H-P	500	M8X1.25	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M10X4-H-P	IL96-M10SX4-H-P	3000	M10X1.50	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M12GX4-H-P	IL96-M12SX4-H-P	3000	M12X1.75	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-M16GX4-H-P	IL96-M16SX4-H-P	3000	M16X2.00	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M20GX4-H-P	IL96-M20SX4-H-P	3000	M20X2.50	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M24GX4-H-P	IL96-M24SX4-H-P	3000	M24X3.00	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL98-M8GX4-H-P	IL98-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M10GX4-H-P	IL98-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M12GX4-H-P	IL98-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M16GX4-H-P	IL98-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M20GX4-H-P	IL98-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M24GX4-H-P	IL98-M24SX4-H-P	3000	M24X3.00	1	1 1/2	4	5 1/2	4	7/16	.51	2.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

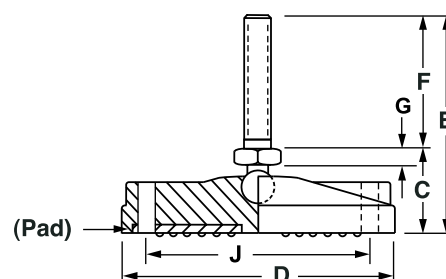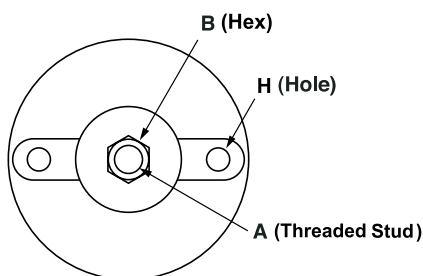

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98A-M8GX4-H-P	IL98A-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M10GX4-H-P	IL98A-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M12GX4-H-P	IL98A-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M16GX4-H-P	IL98A-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M20GX4-H-P	IL98A-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M24GX4-H-P	IL98A-M24SX4-H-P	3000	M24X3.00	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-M8GX4-H-P	IL98B-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M10GX4-H-P	IL98B-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M12GX4-H-P	IL98B-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M16GX4-H-P	IL98B-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M20GX4-H-P	IL98B-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M24GX4-H-P	IL98B-M24SX4-H-P	3000	M24X3.00	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-M8GX4-H-P	IL98C-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M10GX4-H-P	IL98C-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M12GX4-H-P	IL98C-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M16GX4-H-P	IL98C-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M20GX4-H-P	IL98C-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M24GX4-H-P	IL98C-M24SX4-H-P	3000	M24X3.00	1	1 1/2	10	5 1/2	4	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

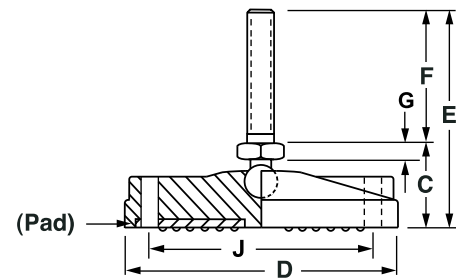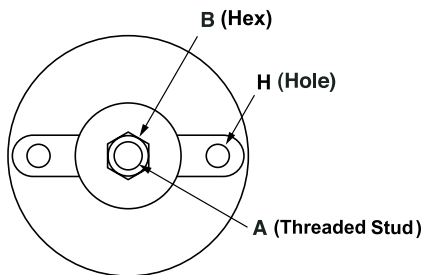

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL92-M10GX5-P	IL92-M10SX5-P	2000	M10X1.50	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M12GX5-P	IL92-M12SX5-P	2000	M12X1.75	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M16GX5-P	IL92-M16SX5-P	2000	M16X2.00	5/8	1	1 1/2	6	5	3/16	-	-
IL92-M20GX5-P	IL92-M20SX5-P	2000	M20X2.50	3/4	1	1 1/2	6	5	3/16	-	-
IL92-M24GX5-P	IL92-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-M10GX5-P	IL94-M10SX5-P	2500	M10X1.50	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M12GX5-P	IL94-M12SX5-P	2500	M12X1.75	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M16GX5-P	IL94-M16SX5-P	2500	M16X2.00	5/8	1	2 3/8	6	5	3/16	-	-
IL94-M20GX5-P	IL94-M20SX5-P	2500	M20X2.50	3/4	1	2 3/8	6	5	3/16	-	-
IL94-M24GX5-P	IL94-M24SX5-P	2500	M24X3.00	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-M10GX5-H-P	IL96-M10SX5-H-P	3000	M10X1.50	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M12GX5-H-P	IL96-M12SX5-H-P	3000	M12X1.75	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M16GX5-H-P	IL96-M16SX5-H-P	3000	M16X2.00	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-M20GX5-H-P	IL96-M20SX5-H-P	3000	M20X2.50	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-M24GX5-H-P	IL96-M24SX5-H-P	3000	M24X3.00	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL98-M10GX5-H-P	IL98-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M12GX5-H-P	IL98-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M16GX5-H-P	IL98-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M20GX5-H-P	IL98-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M24GX5-H-P	IL98-M24SX5-H-P	3000	M24X3.00	1	1 1/2	4	6 1/2	5	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

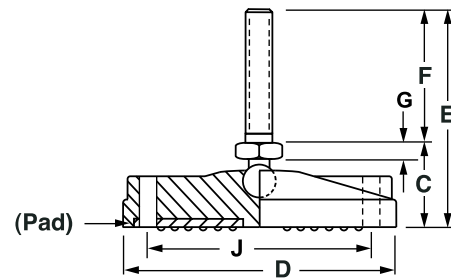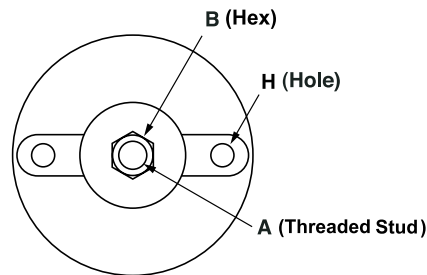

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98A-M10GX5-H-P	IL98A-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M12GX5-H-P	IL98A-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M16GX5-H-P	IL98A-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M20GX5-H-P	IL98A-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M24GX5-H-P	IL98A-M24SX5-H-P	3000	M24X3.00	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-M10GX5-H-P	IL98B-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M12GX5-H-P	IL98B-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M16GX5-H-P	IL98B-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M20GX5-H-P	IL98B-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M24GX5-H-P	IL98B-M24SX5-H-P	3000	M24X3.00	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-M10GX5-H-P	IL98C-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M12GX5-H-P	IL98C-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M16GX5-H-P	IL98C-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M20GX5-H-P	IL98C-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M24GX5-H-P	IL98C-M24SX5-H-P	3000	M24X3.00	1	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.




Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

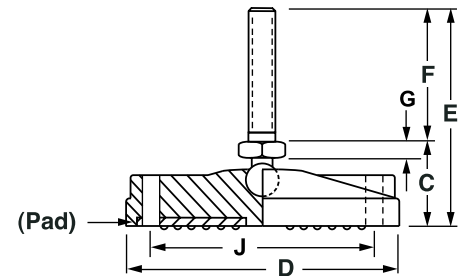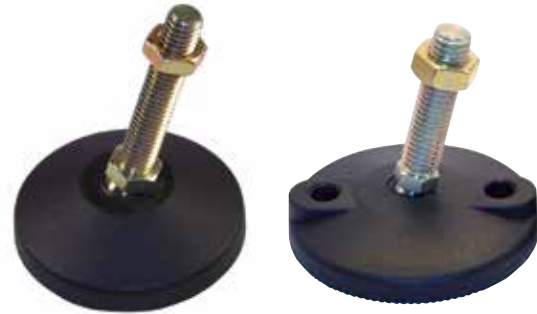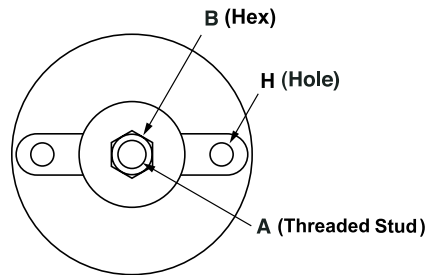

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL92-M10GX6-P	IL92-M10SX6-P	2000	M10X1.50	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M12GX6-P	IL92-M12SX6-P	2000	M12X1.75	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M16GX6-P	IL92-M16SX6-P	2000	M16X2.00	5/8	1	1 1/2	7	6	3/16	-	-
IL92-M20GX6-P	IL92-M20SX6-P	2000	M20X2.50	3/4	1	1 1/2	7	6	3/16	-	-
IL92-M24GX6-P	IL92-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-M10GX6-P	IL94-M10SX6-P	2500	M10X1.50	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M12GX6-P	IL94-M12SX6-P	2500	M12X1.75	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M16GX6-P	IL94-M16SX6-P	2500	M16X2.00	5/8	1	2 3/8	7	6	3/16	-	-
IL94-M20GX6-P	IL94-M20SX6-P	2500	M20X2.50	3/4	1	2 3/8	7	6	3/16	-	-
IL94-M24GX6-P	IL94-M24SX6-P	2500	M24X3.00	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-M10GX6-H-P	IL96-M10SX6-H-P	3000	M10X1.50	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M12GX6-H-P	IL96-M12SX6-H-P	3000	M12X1.75	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M16GX6-H-P	IL96-M16SX6-H-P	3000	M16X2.00	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-M20GX6-H-P	IL96-M20SX6-H-P	3000	M20X2.50	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M24GX6-H-P	IL96-M24SX6-H-P	3000	M24X3.00	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL98-M10GX6-H-P	IL98-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M12GX6-H-P	IL98-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M16GX6-H-P	IL98-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M20GX6-H-P	IL98-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M24GX6-H-P	IL98-M24SX6-H-P	3000	M24X3.00	1	1 1/2	4	7 1/2	6	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**



The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

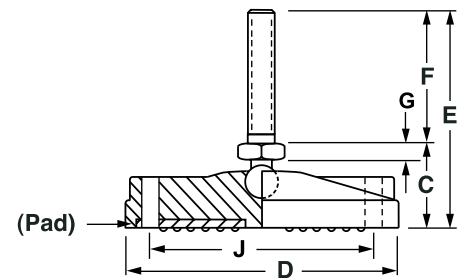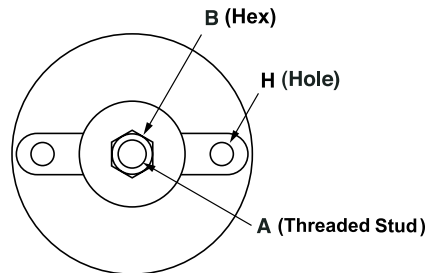**Metric Threads: 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL98A-M10GX6-H-P	IL98A-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M12GX6-H-P	IL98A-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M16GX6-H-P	IL98A-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M20GX6-H-P	IL98A-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M24GX6-H-P	IL98A-M24SX6-H-P	3000	M24X3.00	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-M10GX6-H-P	IL98B-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M12GX6-H-P	IL98B-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M16GX6-H-P	IL98B-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M20GX6-H-P	IL98B-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M24GX6-H-P	IL98B-M24SX6-H-P	3000	M24X3.00	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-M10GX6-H-P	IL98C-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M12GX6-H-P	IL98C-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M16GX6-H-P	IL98C-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M20GX6-H-P	IL98C-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M24GX6-H-P	IL98C-M24SX6-H-P	3000	M24X3.00	1	1 1/2	10	7 1/2	6	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

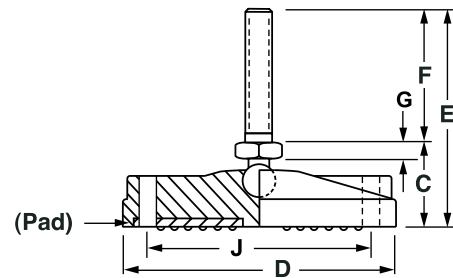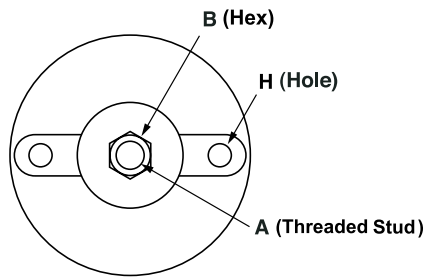

Metric Threads: 1-1/2" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL92-M12GX8-P	IL92-M12SX8-P	2000	M12X1.75	1/2	1	1 1/2	9	8	3/16	-	-
IL92-M16GX8-P	IL92-M16SX8-P	2000	M16X2.00	5/8	1	1 1/2	9	8	3/16	-	-
IL92-M20GX8-P	IL92-M20SX8-P	2000	M20X2.50	3/4	1	1 1/2	9	8	3/16	-	-
IL92-M24GX8-P	IL92-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-M12GX8-P	IL94-M12SX8-P	2500	M12X1.75	1/2	1	2 3/8	9	8	3/16	-	-
IL94-M16GX8-P	IL94-M16SX8-P	2500	M16X2.00	5/8	1	2 3/8	9	8	3/16	-	-
IL94-M20GX8-P	IL94-M20SX8-P	2500	M20X2.50	3/4	1	2 3/8	9	8	3/16	-	-
IL94-M24GX8-P	IL94-M24SX8-P	2500	M24X3.00	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-M12GX8-H-P	IL96-M12SX8-H-P	3000	M12X1.75	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-M16GX8-H-P	IL96-M16SX8-H-P	3000	M16X2.00	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-M20GX8-H-P	IL96-M20SX8-H-P	3000	M20X2.50	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-M24GX8-H-P	IL96-M24SX8-H-P	3000	M24X3.00	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL98-M12GX8-H-P	IL98-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M16GX8-H-P	IL98-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M20GX8-H-P	IL98-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M24GX8-H-P	IL98-M24SX8-H-P	3000	M24X3.00	1	1 1/2	4	9 1/2	8	7/16	.51	2.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 7 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)



Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

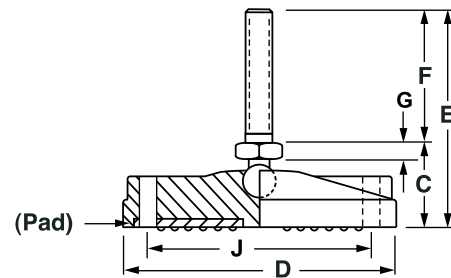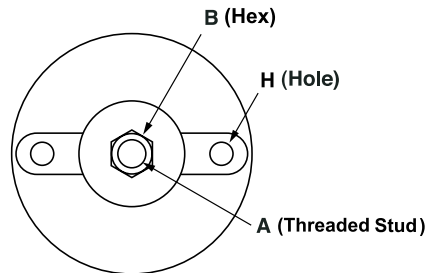

Metric Threads: 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL98A-M12GX8-H-P	IL98A-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M16GX8-H-P	IL98A-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M20GX8-H-P	IL98A-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M24GX8-H-P	IL98A-M24SX8-H-P	3000	M24X3.00	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-M12GX8-H-P	IL98B-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M16GX8-H-P	IL98B-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M20GX8-H-P	IL98B-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M24GX8-H-P	IL98B-M24SX8-H-P	3000	M24X3.00	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-M12GX8-H-P	IL98C-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M16GX8-H-P	IL98C-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M20GX8-H-P	IL98C-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M24GX8-H-P	IL98C-M24SX8-H-P	3000	M24X3.00	1	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm