




**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

[www.equipmentknobs.com](http://www.equipmentknobs.com) & [www.iec-corp.com](http://www.iec-corp.com)

**KNOB & HANDLE**

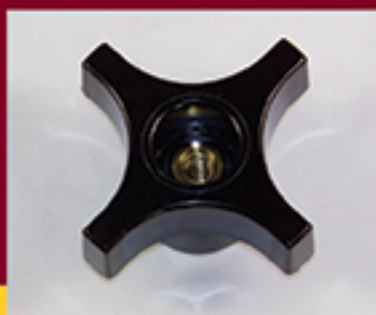

**CLAMP  
ADJUST  
STABILIZE  
FASTEN**

**Ph. 562.597.4533**

## **Welcome ...**

We are pleased to introduce our newly expanded Knob and Handle catalog with many innovative Knob designs along with a wide range of traditional products that have been requested by our many customers. IEC is a leader in the design of leveling components that today are meeting the needs of OEM manufacturers for quality, function, and cost. We have taken this same challenge in developing a full line of low profile knobs in a wide range of sizes, threads and materials for OEM designers and manufacturers.

We've included in this catalog an overview page of our complete line of knobs and handles, a selection guide for choosing the right component and product tables with specifications for easily finding an off-the-shelf component that is just right for your application. There is a standard quote request form available in the catalog for requesting custom designs and OEM pricing on larger quantities.

IEC's mission since 1992 has been to lead the equipment component industry in meeting the needs of OEM equipment, display and furniture manufacturers with a broad line of components that match the high standards and cost requirements of our customers. We are specialists in providing innovative solutions for clamping, controlling, leveling, adjusting, stabilizing and gliding by offering off-the-shelf products in a wide range of sizes, materials and features most often requested by our customers. We have an engineering department available who is always happy to assist you with selecting from thousands of IEC's standard products the best solution for your application.

It is our attention to customer service for nearly twenty years that has enabled IEC to become the leader in the design of equipment component products. This dedicated effort has resulted in the design and development of thousands of new components, stronger customer service and the assurance that the products you specify today will continue to be available for the duration of your product life-cycle.



## INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.equipmentknobs.com | www.iec-corp.com

### KNOBS & HANDLES

### CONTENTS

#### CONTENTS

##### INTRODUCTION

CONTENTS .....3

OVERVIEW .....4

SELECTION GUIDE .....5

#### KNOBS

##### MOST POPULAR IEC KNOBS

3 Lobe Phenolic Knobs.....6

4 Lobe Phenolic Knobs.....7

5 Lobe Phenolic Knobs.....8

6 Lobe Phenolic Knobs.....9-10

Thru-Hole Phenolic Knobs (3 Lobe & 7 Lobe)..... 11

##### LOW PROFILE SHOULDERLESS KNOBS

Stud knobs.....12-15

Knob Hub/Sleeves.....12-13

Insert/Socket Type ..... 14

##### LOBE KNOBS

2 Lobe .....16-17

#### RFQ FAX-BACK FORM

Request A Quote Form ..... 18

Warranty and Disclaimer..... 19



## KNOBS

### **MOST POPULAR IEC 3-7 LOBE PHENOLIC KNOBS**

These best selling, economical phenolic 3-7 lobe socket, stud and thru-hole knobs have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application. Socket and thru-hole models feature brass threaded insert. Stud models feature a trivalent zinc plated steel stud.




### **LOW PROFILE SHOULDERLESS KNOBS - STUD & INSERT**

These low profile shoulderless knobs have a black polypropylene base and grip ridges on the outside diameter. The threaded sockets are available in brass, a molded in steel hex nut or simply with molded threads.



### **THREADED NYLON KNOB HUBS / SLEEVES**

These glass-filled black nylon threaded knob hubs can be used for various applications including an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob.



### **2, 3 & 4 LOBE PHENOLIC KNOBS**

Phenolic 2, 3 and 4 lobe knobs are offered with a brass threaded insert, a zinc-plated steel stud or a stainless steel stud.





| Features by Family  | Low Profile Knobs | Prong Knobs | Oval Round & Flat Knobs | Knurled Knobs | Circular Knobs | Lobe Knobs | Handles |
|---------------------|-------------------|-------------|-------------------------|---------------|----------------|------------|---------|
| Inch Threads        | Yes               | Yes         | Yes                     | Yes           | Yes            | Yes        | Yes     |
| Metric Threads      | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Steel Inserts       | Yes               | Yes         | Yes                     | N/A           | Yes            | Yes        | N/A     |
| Brass Inserts       | Yes               | Yes         | Yes                     | Yes           | Yes            | Yes        | Yes     |
| Stainless Studs     | Yes               | Yes         | N/A                     | Yes           | Yes            | Yes        | N/A     |
| Steel Studs         | Yes               | Yes         | N/A                     | Yes           | Yes            | Yes        | N/A     |
| Phenolic            | Yes               | Yes         | Yes                     | Yes           | Yes            | Yes        | Yes     |
| Polypropylene       | Yes               | Yes         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Extended Studs      | Yes               | N/A         | N/A                     | N/A           | N/A            | Yes        | N/A     |
| Large Round Knobs   | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Shoulderless Design | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Multiple Colors     | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Thread Sleeve Cover | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Threaded Knob Hub   | Yes               | N/A         | N/A                     | N/A           | N/A            | N/A        | N/A     |
| Ratchet             | N/A               | N/A         | N/A                     | N/A           | N/A            | N/A        | Yes     |
| Cushioned Grip      | N/A               | N/A         | N/A                     | N/A           | N/A            | Yes        | N/A     |
| Tapered             | N/A               | N/A         | N/A                     | N/A           | N/A            | N/A        | Yes     |
| Catalog Page        | 8-11              | 12          | 13-14                   | 15            | 16-17          | 16-32      | 33-34   |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com



Web: www.equipmentknobs.com | www.iec-corp.com

**MOST POPULAR IEC KNOBS**

**3 LOBE KNOBS**

### 3 Lobe Knob Socket - Phenolic

These best selling, economical phenolic 3 lobe female threaded (socket) knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

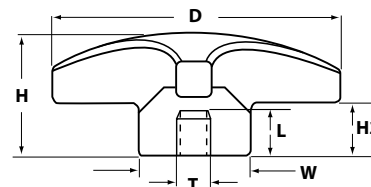


#### 3 LOBE KNOB SOCKET - PHENOLIC

| P/N      | Dia.  | Height | Width | H2  | Thread  | Length |
|----------|-------|--------|-------|-----|---------|--------|
| IL260-4F | 1     | 13/16  | 9/16  | 3/8 | 1/4-20  | 1/2    |
| IL260-5F | 1     | 13/16  | 9/16  | 3/8 | 5/16-18 | 1/2    |
| IL260-6F | 1     | 13/16  | 9/16  | 3/8 | 3/8-16  | 1/2    |
| IL261-4F | 1-1/2 | 1      | 7/8   | 1/2 | 1/4-20  | 1/2    |
| IL261-5F | 1-1/2 | 1      | 7/8   | 1/2 | 5/16-18 | 1/2    |
| IL261-6F | 1-1/2 | 1      | 7/8   | 1/2 | 3/8-16  | 1/2    |

### 3 Lobe Knob Thru Hole - Phenolic

These best selling, economical phenolic 3 lobe thru-hole threaded knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.


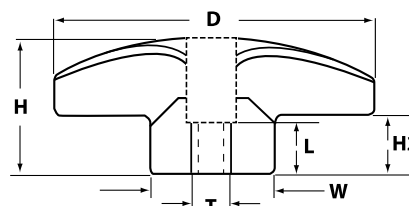


#### 3 LOBE THRU HOLE KNOB - PHENOLIC

| P/N      | Dia.  | Height | Width | H2  | Thread  | Length |
|----------|-------|--------|-------|-----|---------|--------|
| IL261-4T | 1-1/2 | 1      | 7/8   | 1/2 | 1/4-20  | 3/4    |
| IL261-5T | 1-1/2 | 1      | 7/8   | 1/2 | 5/16-18 | 3/4    |
| IL261-6T | 1-1/2 | 1      | 7/8   | 1/2 | 3/8-16  | 3/4    |

### 3 Lobe Knob Steel Stud - Phenolic

These best selling, economical phenolic 3 lobe threaded stud knobs are offered with a trivalent zinc plated steel stud. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

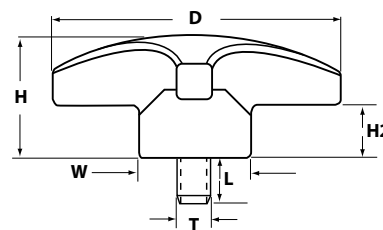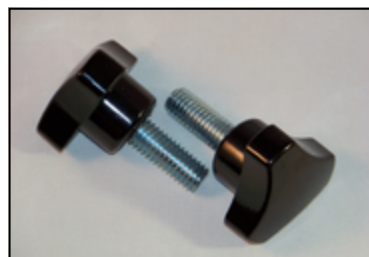

#### 3 LOBE KNOB WITH STEEL STUD - PHENOLIC

| P/N          | Dia.  | Height | Width | H2  | Thread  | Length |
|--------------|-------|--------|-------|-----|---------|--------|
| IL261-4MX1/2 | 1-1/2 | 1      | 7/8   | 1/2 | 1/4-20  | 1/2    |
| IL261-4MX1   | 1-1/2 | 1      | 7/8   | 1/2 | 1/4-20  | 1      |
| IL261-5MX1/2 | 1-1/2 | 1      | 7/8   | 1/2 | 5/16-18 | 1/2    |
| IL261-5MX1   | 1-1/2 | 1      | 7/8   | 1/2 | 5/16-18 | 1      |
| IL261-6MX3/4 | 1-1/2 | 1      | 7/8   | 1/2 | 3/8-16  | 3/4    |
| IL261-6MX1   | 1-1/2 | 1      | 7/8   | 1/2 | 3/8-16  | 1      |





# INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com



Web: www.equipmentknobs.com | www.iec-corp.com

## MOST POPULAR IEC KNOBS

### 4 LOBE KNOBS

#### 4 Lobe Knob Socket - Phenolic

These best selling, economical phenolic 4 lobe female threaded (socket) knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

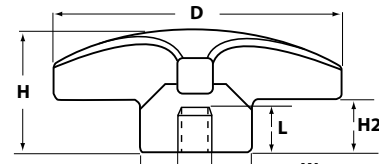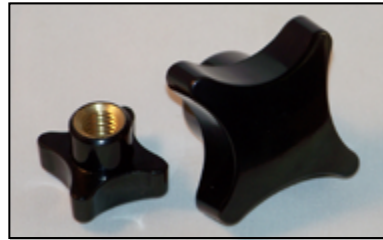


#### 4 LOBE KNOB WITH BRASS SOCKET - PHENOLIC

| P/N      | Dia.  | Height | Width | H2    | Thread  | Length |
|----------|-------|--------|-------|-------|---------|--------|
| IL262-4F | 1-1/4 | 13/16  | 9/16  | 3/8   | 1/4-20  | 1/2    |
| IL262-5F | 1-1/4 | 13/16  | 9/16  | 3/8   | 5/16-18 | 1/2    |
| IL262-6F | 1-1/4 | 13/16  | 9/16  | 3/8   | 3/8-16  | 1/2    |
| IL263-4F | 2     | 1-1/4  | 29/32 | 19/32 | 1/4-20  | 1/2    |
| IL263-5F | 2     | 1-1/4  | 29/32 | 19/32 | 5/16-18 | 1/2    |
| IL263-6F | 2     | 1-1/4  | 29/32 | 19/32 | 3/8-16  | 1/2    |

#### 4 Lobe Knob Steel Stud - Phenolic

These best selling, economical phenolic 4 lobe threaded stud knobs are offered with a trivalent zinc plated steel stud. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

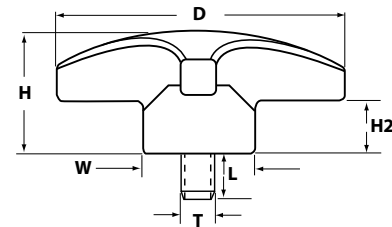


#### 4 LOBE KNOB WITH STEEL STUD - PHENOLIC

| P/N            | Dia.  | Height | Width | H2    | Thread  | Length |
|----------------|-------|--------|-------|-------|---------|--------|
| IL262-4MX1/2   | 1-1/4 | 13/16  | 9/16  | 3/8   | 1/4-20  | 1/2    |
| IL262-4MX1     | 1-1/4 | 13/16  | 9/16  | 3/8   | 1/4-20  | 1      |
| IL262-5MX1/2   | 1-1/4 | 13/16  | 9/16  | 3/8   | 5/16-18 | 1/2    |
| IL262-5MX1     | 1-1/4 | 13/16  | 9/16  | 3/8   | 5/16-18 | 1      |
| IL262-6MX3/4   | 1-1/4 | 13/16  | 9/16  | 3/8   | 3/8-16  | 3/4    |
| IL262-6MX1     | 1-1/4 | 13/16  | 9/16  | 3/8   | 3/8-16  | 1      |
| IL262-6MX1-1/2 | 1-1/4 | 13/16  | 9/16  | 3/8   | 3/8-16  | 1-1/2  |
| IL263-4MX1     | 2     | 1-1/4  | 29/32 | 19/32 | 1/4-20  | 1      |
| IL263-5MX1/2   | 2     | 1-1/4  | 29/32 | 19/32 | 5/16-18 | 1/2    |
| IL263-5MX1     | 2     | 1-1/4  | 29/32 | 19/32 | 5/16-18 | 1      |
| IL263-6MX3/4   | 2     | 1-1/4  | 29/32 | 19/32 | 3/8-16  | 3/4    |
| IL263-6MX1     | 2     | 1-1/4  | 29/32 | 19/32 | 3/8-16  | 1      |
| IL263-6MX1-1/2 | 2     | 1-1/4  | 29/32 | 19/32 | 3/8-16  | 1-1/2  |





## 5 Lobe Knob Socket - Phenolic

These best selling, economical high quality phenolic 5 lobe female threaded (socket) knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

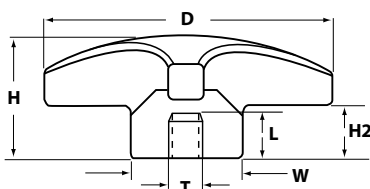

## 5 Lobe Knob Steel Stud - Phenolic

These high quality phenolic 5 lobe threaded stud knobs are offered with a trivalent zinc plated steel stud. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

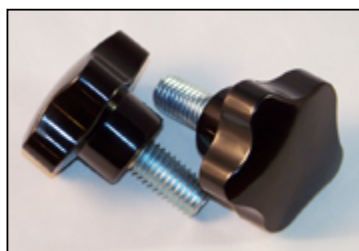

### 5 LOBE KNOB WITH BRASS SOCKET - PHENOLIC

| P/N      | Dia.  | Height | Width  | H2    | Thread  | Length |
|----------|-------|--------|--------|-------|---------|--------|
| IL264-4F | 1-1/2 | 1      | 13/16  | 15/32 | 1/4-20  | 5/8    |
| IL264-5F | 1-1/2 | 1      | 13/16  | 15/32 | 5/16-18 | 5/8    |
| IL264-6F | 1-1/2 | 1      | 13/16  | 15/32 | 3/8-16  | 5/8    |
| IL265-5F | 2     | 1-1/4  | 1      | 9/16  | 5/16-18 | 3/4    |
| IL265-6F | 2     | 1-1/4  | 1      | 9/16  | 3/8-16  | 3/4    |
| IL265-7F | 2     | 1-1/4  | 1      | 9/16  | 1/2-13  | 3/4    |
| IL266-5F | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 5/16-18 | 7/8    |
| IL266-6F | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 3/8-16  | 7/8    |
| IL266-7F | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 1/2-13  | 7/8    |

### 5 LOBE KNOB WITH STEEL STUD - PHENOLIC

| P/N            | Dia.  | Height | Width  | H2    | Thread  | Length |
|----------------|-------|--------|--------|-------|---------|--------|
| IL264-4MX1/2   | 1-1/2 | 1      | 13/16  | 15/32 | 1/4-20  | 1/2    |
| IL264-4MX1     | 1-1/2 | 1      | 13/16  | 15/32 | 1/4-20  | 1      |
| IL264-5MX1/2   | 1-1/2 | 1      | 13/16  | 15/32 | 5/16-18 | 1/2    |
| IL264-5MX1     | 1-1/2 | 1      | 13/16  | 15/32 | 5/16-18 | 1      |
| IL264-5MX1-1/2 | 1-1/2 | 1      | 13/16  | 15/32 | 5/16-18 | 1-1/2  |
| IL264-6MX3/4   | 1-1/2 | 1      | 13/16  | 15/32 | 3/8-16  | 3/4    |
| IL264-6MX1-1/2 | 1-1/2 | 1      | 13/16  | 15/32 | 3/8-16  | 1-1/2  |
| IL265-4MX3/4   | 2     | 1-1/4  | 1      | 9/16  | 1/4-20  | 3/4    |
| IL265-4MX1-1/2 | 2     | 1-1/4  | 1      | 9/16  | 1/4-20  | 1-1/2  |
| IL265-5MX3/4   | 2     | 1-1/4  | 1      | 9/16  | 5/16-18 | 3/4    |
| IL265-5MX1     | 2     | 1-1/4  | 1      | 9/16  | 5/16-18 | 1      |
| IL265-5MX1-1/2 | 2     | 1-1/4  | 1      | 9/16  | 5/16-18 | 1-1/2  |
| IL265-6MX3/4   | 2     | 1-1/4  | 1      | 9/16  | 3/8-16  | 3/4    |
| IL265-6MX1     | 2     | 1-1/4  | 1      | 9/16  | 3/8-16  | 1      |
| IL265-6MX1-1/2 | 2     | 1-1/4  | 1      | 9/16  | 3/8-16  | 1-1/2  |
| IL265-7MX1     | 2     | 1-1/4  | 1      | 9/16  | 1/2-13  | 1      |
| IL266-5MX3/4   | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 5/16-18 | 3/4    |
| IL266-5MX1     | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 5/16-18 | 1      |
| IL266-5MX1-1/2 | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 5/16-18 | 1-1/2  |
| IL266-6MX3/4   | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 3/8-16  | 3/4    |
| IL266-6MX1     | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 3/8-16  | 1      |
| IL266-6MX1-1/2 | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 3/8-16  | 1-1/2  |
| IL266-7MX1     | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 1/2-13  | 1      |
| IL266-7MX2     | 2-1/2 | 1-1/2  | 1-7/32 | 5/8   | 1/2-13  | 2      |





**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

**MOST POPULAR IEC KNOBS**

**6 LOBE KNOBS**

### 6 Lobe Knob Socket - Phenolic

These best selling, economical phenolic 6 lobe female threaded (socket) knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

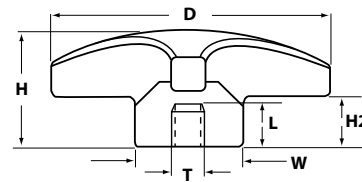

### 6 LOBE KNOB WITH BRASS SOCKET - PHENOLIC

| P/N      | Dia.  | Height | Width  | H2    | Thread  | Length |
|----------|-------|--------|--------|-------|---------|--------|
| IL271-5F | 2     | 1-3/16 | 1      | 5/8   | 5/16-18 | 11/16  |
| IL271-6F | 2     | 1-3/16 | 1      | 5/8   | 3/8-16  | 11/16  |
| IL271-7F | 2     | 1-3/16 | 1      | 5/8   | 1/2-13  | 11/16  |
| IL271-8F | 2     | 1-3/16 | 1      | 5/8   | 5/8-11  | 11/16  |
| IL272-5F | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/16-18 | 7/8    |
| IL272-6F | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 3/8-16  | 7/8    |
| IL272-7F | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 1/2-13  | 7/8    |
| IL272-8F | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/8-11  | 7/8    |
| IL273-6F | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 3/8-16  | 1-1/4  |
| IL273-7F | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 1/2-13  | 1-1/4  |
| IL273-8F | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 5/8-11  | 1-1/4  |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

**MOST POPULAR IEC KNOBS**

**6 LOBE KNOBS**

**6 Lobe Knob  
Steel Stud - Phenolic**

These high quality phenolic 6 lobe threaded stud knobs are offered with a trivalent zinc plated steel stud. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

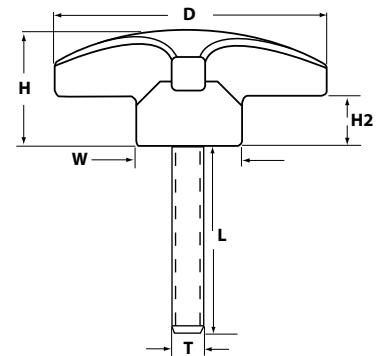

**6 LOBE KNOB WITH STEEL STUD - PHENOLIC**

| P/N            | Dia.  | Height | Width  | H2    | Thread  | Length |
|----------------|-------|--------|--------|-------|---------|--------|
| IL271-4MX1     | 2     | 1-3/16 | 1      | 5/8   | 1/4-20  | 1      |
| IL271-5MX3/4   | 2     | 1-3/16 | 1      | 5/8   | 5/16-18 | 3/4    |
| IL271-5MX1     | 2     | 1-3/16 | 1      | 5/8   | 5/16-18 | 1      |
| IL271-5MX1-1/2 | 2     | 1-3/16 | 1      | 5/8   | 5/16-18 | 1-1/2  |
| IL271-6MX3/4   | 2     | 1-3/16 | 1      | 5/8   | 3/8-16  | 3/4    |
| IL271-6MX1     | 2     | 1-3/16 | 1      | 5/8   | 3/8-16  | 1      |
| IL271-6MX1-1/2 | 2     | 1-3/16 | 1      | 5/8   | 3/8-16  | 1-1/2  |
| IL271-6MX2     | 2     | 1-3/16 | 1      | 5/8   | 3/8-16  | 2      |
| IL271-7MX1     | 2     | 1-3/16 | 1      | 5/8   | 1/2-13  | 1      |
| IL271-7MX2     | 2     | 1-3/16 | 1      | 5/8   | 1/2-13  | 2      |
| IL271-8MX1     | 2     | 1-3/16 | 1      | 5/8   | 5/8-11  | 1      |
| IL271-8MX2     | 2     | 1-3/16 | 1      | 5/8   | 5/8-11  | 2      |
| IL272-5MX3/4   | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/16-18 | 3/4    |
| IL272-5MX1     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/16-18 | 1      |
| IL272-5MX1-1/2 | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/16-18 | 1-1/2  |
| IL272-6MX1     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 3/8-16  | 1      |
| IL272-6MX1-1/2 | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 3/8-16  | 1-1/2  |
| IL272-6MX2     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 3/8-16  | 2      |
| IL272-7MX1     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 1/2-13  | 1      |
| IL272-7MX2     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 1/2-13  | 2      |
| IL272-8MX1     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/8-11  | 1      |
| IL272-8MX2     | 2-1/2 | 1-3/8  | 1-3/32 | 3/4   | 5/8-11  | 2      |
| IL273-5MX1     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 5/16-18 | 1      |
| IL273-5MX1-1/2 | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 5/16-18 | 1-1/2  |
| IL273-6MX1     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 3/8-16  | 1      |
| IL273-6MX1-1/2 | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 3/8-16  | 1-1/2  |
| IL273-6MX2     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 3/8-16  | 2      |
| IL273-7MX2     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 1/2-13  | 2      |
| IL273-8MX1     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 5/8-11  | 1      |
| IL273-8MX2     | 3-1/8 | 2-3/16 | 1-1/4  | 1-1/4 | 5/8-11  | 2      |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

**MOST POPULAR IEC KNOBS**

**THRU-HOLE LOBE KNOBS**

### 3 Lobe Knob Thru Hole - Phenolic

These best selling, economical phenolic 3 lobe thru-hole threaded knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

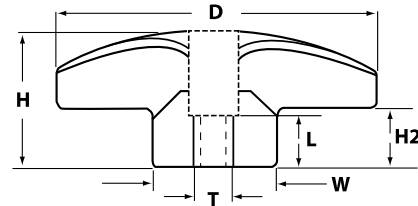


#### 3 LOBE THRU HOLE KNOB - PHENOLIC

| P/N      | Dia.  | Height | Width | H2  | Thread  | Length |
|----------|-------|--------|-------|-----|---------|--------|
| IL261-4T | 1-1/2 | 1      | 7/8   | 1/2 | 1/4-20  | 3/4    |
| IL261-5T | 1-1/2 | 1      | 7/8   | 1/2 | 5/16-18 | 3/4    |
| IL261-6T | 1-1/2 | 1      | 7/8   | 1/2 | 3/8-16  | 3/4    |

### 7 Lobe Knob Thru Hole - Phenolic

These best selling, economical phenolic 7 lobe thru-hole threaded knobs are offered with a brass threaded insert. They have highly polished smooth surfaces and do not show a parting line. Very sturdy and attractive for any industrial or commercial application.

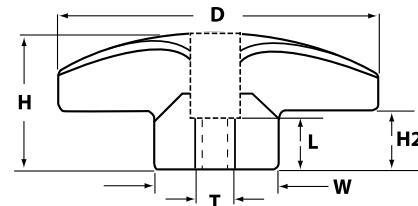

#### 7 LOBE KNOB WITH BRASS THRU HOLE - PHENOLIC

| P/N      | Dia.  | Height | Width | H2    | Thread  | Length |
|----------|-------|--------|-------|-------|---------|--------|
| IL267-5T | 1-1/2 | 1-3/32 | 7/8   | 9/16  | 5/16-18 | 3/4    |
| IL267-6T | 1-1/2 | 1-3/32 | 7/8   | 9/16  | 3/8-16  | 3/4    |
| IL267-7F | 1-1/2 | 1-3/32 | 7/8   | 9/16  | 1/2-13  | 3/4    |
| IL268-4T | 2     | 1-1/4  | 1-1/8 | 5/8   | 1/4-20  | 1      |
| IL268-5T | 2     | 1-1/4  | 1-1/8 | 5/8   | 5/16-18 | 1      |
| IL268-6T | 2     | 1-1/4  | 1-1/8 | 5/8   | 3/8-16  | 1      |
| IL268-7T | 2     | 1-1/4  | 1-1/8 | 5/8   | 1/2-13  | 1      |
| IL269-5T | 2-1/2 | 1-1/2  | 1-1/4 | 11/16 | 5/16-18 | 1-1/4  |
| IL269-6T | 2-1/2 | 1-1/2  | 1-1/4 | 11/16 | 3/8-16  | 1-1/4  |
| IL269-7T | 2-1/2 | 1-1/2  | 1-1/4 | 11/16 | 1/2-13  | 1-1/4  |
| IL269-8T | 2-1/2 | 1-1/2  | 1-1/4 | 11/16 | 5/8-11  | 1-1/4  |
| IL270-6T | 3-1/8 | 2      | 1-3/8 | 1     | 3/8-16  | 1-1/4  |
| IL270-7T | 3-1/8 | 2      | 1-3/8 | 1     | 1/2-13  | 1-1/4  |
| IL270-8T | 3-1/8 | 2      | 1-3/8 | 1     | 5/8-11  | 1-1/4  |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.equipmentknobs.com | www.iec-corp.com

**KNOBS****LOW PROFILE KNOBS****Low Profile Knobs**

These low profile shoulderless knobs have a black polypropylene base and grip ridges on the outside diameter. The threaded studs are available in zinc-plated steel or stainless steel. Other colors also available: clear, white, brown, blue, red, gray, etc.

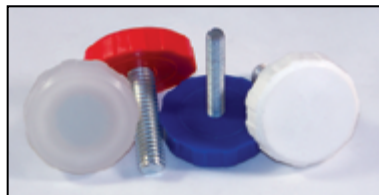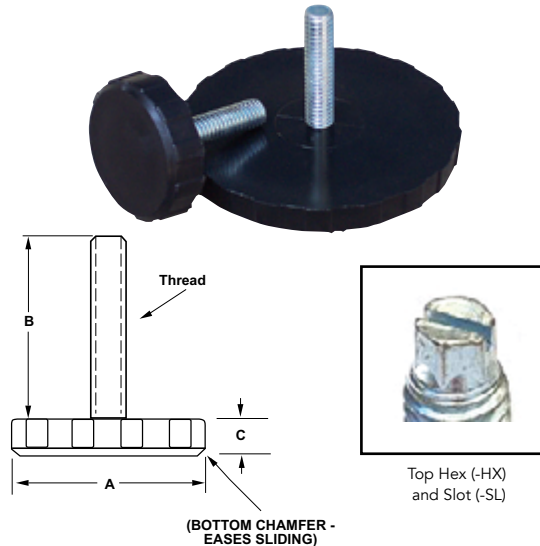

Many colors available as custom option.

**Threaded Nylon Knob Hubs/Sleeves**

These glass-filled black nylon threaded knob hubs can be used for many applications as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used as a "thru-hole" knob or a locking nut.



\* Patent Pending

**BLACK NYLON THREADED KNOB HUBS**

| P/N              | THREAD  | DIA. | HEIGHT |
|------------------|---------|------|--------|
| IL80-HUB-4-THRU  | 1/4-20  | 1"   | 3/8    |
| IL80-HUB-5-THRU  | 5/16-18 | 1"   | 3/8    |
| IL80-HUB-6-THRU  | 3/8-16  | 1"   | 3/8    |
| IL80A-HUB-4-THRU | 1/4-20  | 1"   | 3/4    |
| IL80A-HUB-5-THRU | 5/16-18 | 1"   | 3/4    |
| IL80A-HUB-6-THRU | 3/8-16  | 1"   | 3/4    |

| Steel                                              | SS           | Load | Thread  | A     | B     | C   |
|----------------------------------------------------|--------------|------|---------|-------|-------|-----|
| <b>Steel and Stainless Steel Knob Style Glides</b> |              |      |         |       |       |     |
| IL82-4Bx1/4                                        | IL82-4BSx1/4 | 100  | 1/4-20  | 1-1/2 | 1/4   | 3/8 |
| IL82-4Bx1/2                                        | IL82-4BSx1/2 | 100  | 1/4-20  | 1-1/2 | 1/2   | 3/8 |
| IL82-4Bx1/2-HX-SL                                  |              | 100  | 1/4-20  | 1-1/2 | 1/2   | 3/8 |
| IL82-4Bx3/4                                        | IL82-4BSx3/4 | 100  | 1/4-20  | 1-1/2 | 3/4   | 3/8 |
| IL82-4Bx3/4-HX-SL                                  |              | 100  | 1/4-20  | 1-1/2 | 3/4   | 3/8 |
| IL82-4Bx1                                          | IL82-4BSx1   | 100  | 1/4-20  | 1-1/2 | 1     | 3/8 |
| IL82-4Bx1-HX-SL                                    |              | 100  | 1/4-20  | 1-1/2 | 1     | 3/8 |
| IL82-4Bx125                                        | IL82-4BSx125 | 100  | 1/4-20  | 1-1/2 | 1-1/4 | 3/8 |
| IL82-4Bx125-HX-SL                                  |              | 100  | 1/4-20  | 1-1/2 | 1-1/4 | 3/8 |
| IL82-4Bx150                                        | IL82-4BSx150 | 100  | 1/4-20  | 1-1/2 | 1-1/2 | 3/8 |
| IL82-4Bx175                                        | IL82-4BSx175 | 100  | 1/4-20  | 1-1/2 | 1-3/4 | 3/8 |
| IL82-4Bx175-HX-SL                                  |              | 100  | 1/4-20  | 1-1/2 | 1-3/4 | 3/8 |
| IL82-4Bx2                                          | IL82-4BSx2   | 100  | 1/4-20  | 1-1/2 | 2     | 3/8 |
| IL82-4Bx275                                        | IL82-4BSx275 | 100  | 1/4-20  | 1-1/2 | 2-3/4 | 3/8 |
| IL82-5Bx1/4                                        | IL82-5BSx1/4 | 500  | 5/16-18 | 1-1/2 | 1/4   | 3/8 |
| IL82-5Bx1/2                                        | IL82-5BSx1/2 | 500  | 5/16-18 | 1-1/2 | 1/2   | 3/8 |
| IL82-5Bx1/2-HX-SL                                  |              | 500  | 5/16-18 | 1-1/2 | 1/2   | 3/8 |
| IL82-5Bx3/4                                        | IL82-5BSx3/4 | 500  | 5/16-18 | 1-1/2 | 3/4   | 3/8 |
| IL82-5Bx3/4-HX-SL                                  |              | 500  | 5/16-18 | 1-1/2 | 3/4   | 3/8 |
| IL82-5Bx1                                          | IL82-5BSx1   | 500  | 5/16-18 | 1-1/2 | 1     | 3/8 |
| IL82-5Bx1-HX-SL                                    |              | 500  | 5/16-18 | 1-1/2 | 1     | 3/8 |
| IL82-5Bx125-HX-SL                                  |              | 500  | 5/16-18 | 1-1/2 | 1-1/4 | 3/8 |
| IL82-5Bx125                                        | IL82-5BSx125 | 500  | 5/16-18 | 1-1/2 | 1-1/4 | 3/8 |
| IL82-5Bx175                                        | IL82-5BSx175 | 500  | 5/16-18 | 1-1/2 | 1-3/4 | 3/8 |
| IL82-5Bx175-HX-SL                                  |              | 500  | 5/16-18 | 1-1/2 | 1-3/4 | 3/8 |
| IL82-5Bx225-HX-SL                                  |              | 500  | 5/16-18 | 1-1/2 | 2-1/4 | 3/8 |
| IL82-6Bx1/4                                        | IL82-6BSx1/4 | 1000 | 3/8-16  | 1-1/2 | 1/4   | 3/8 |
| IL82-6Bx1/2                                        | IL82-6BSx1/2 | 1000 | 3/8-16  | 1-1/2 | 1/2   | 3/8 |
| IL82-6Bx1/2-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 1/2   | 3/8 |
| IL82-6Bx3/4-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 3/4   | 3/8 |
| IL82-6Bx1                                          | IL82-6BSx1   | 1000 | 3/8-16  | 1-1/2 | 1     | 3/8 |
| IL82-6Bx1-HX-SL                                    |              | 1000 | 3/8-16  | 1-1/2 | 1     | 3/8 |
| IL82-6Bx125                                        | IL82-6BSx125 | 1000 | 3/8-16  | 1-1/2 | 1-1/4 | 3/8 |
| IL82-6Bx125-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 1-1/4 | 3/8 |
| IL82-6Bx150                                        | IL82-6BSx150 | 1000 | 3/8-16  | 1-1/2 | 1-1/2 | 3/8 |
| IL82-6Bx175-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 1-3/4 | 3/8 |
| IL82-6Bx175                                        | IL82-6BSx175 | 1000 | 3/8-16  | 1-1/2 | 1-3/4 | 3/8 |
| IL82-6Bx238                                        | IL82-6BSx238 | 1000 | 3/8-16  | 1-1/2 | 2-3/8 | 3/8 |
| IL82-6Bx238-SL                                     |              | 1000 | 3/8-16  | 1-1/2 | 2-3/8 | 3/8 |
| IL82-6Bx238-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 2-3/8 | 3/8 |
| IL82-6Bx275-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 2-3/4 | 3/8 |
| IL82-6Bx338-HX-SL                                  |              | 1000 | 3/8-16  | 1-1/2 | 3-3/8 | 3/8 |
| IL82-7Bx3/4                                        | IL82-7BSx3/4 | 1000 | 1/2-13  | 1-1/2 | 3/4   | 3/8 |
| IL82-7Bx1                                          | IL82-7BSx1   | 1000 | 1/2-13  | 1-1/2 | 1     | 3/8 |
| IL82-7Bx125                                        | IL82-7BSx125 | 1000 | 1/2-13  | 1-1/2 | 1-1/4 | 3/8 |
| IL82-7Bx150                                        | IL82-7BSx150 | 1000 | 1/2-13  | 1-1/2 | 1-1/2 | 3/8 |
| IL82-7Bx238                                        |              | 1000 | 1/2-13  | 1-1/2 | 2-3/8 | 3/8 |
| IL84-4Bx1/4                                        | IL84-4BSx1/4 | 100  | 1/4-20  | 2     | 1/4   | 3/8 |
| IL84-4Bx1/2                                        | IL84-4BSx1/2 | 100  | 1/4-20  | 2     | 1/2   | 3/8 |
| IL84-4Bx1/2-HX-SL                                  |              | 100  | 1/4-20  | 2     | 1/2   | 3/8 |
| IL84-4Bx3/4                                        | IL84-4BSx3/4 | 100  | 1/4-20  | 2     | 3/4   | 3/8 |
| IL84-4Bx3/4-HX-SL                                  |              | 100  | 1/4-20  | 2     | 3/4   | 3/8 |
| IL84-4Bx1                                          | IL84-4BSx1   | 100  | 1/4-20  | 2     | 1     | 3/8 |
| IL84-4Bx1-HX-SL                                    |              | 100  | 1/4-20  | 2     | 1     | 3/8 |
| IL84-4Bx125                                        | IL84-4BSx125 | 100  | 1/4-20  | 2     | 1-1/4 | 3/8 |
| IL84-4Bx125-HX-SL                                  |              | 100  | 1/4-20  | 2     | 1-1/4 | 3/8 |
| IL84-4Bx150                                        | IL84-4BSx150 | 100  | 1/4-20  | 2     | 1-1/2 | 3/8 |
| IL84-4Bx175                                        | IL84-4BSx175 | 100  | 1/4-20  | 2     | 1-3/4 | 3/8 |
| IL84-4Bx175-HX-SL                                  |              | 100  | 1/4-20  | 2     | 1-3/4 | 3/8 |
| IL84-4Bx2                                          | IL84-4BSx2   | 100  | 1/4-20  | 2     | 2     | 3/8 |
| IL84-4Bx275                                        | IL84-4BSx275 | 100  | 1/4-20  | 2     | 2-3/4 | 3/8 |
| IL84-5Bx1/4                                        | IL84-5BSx1/4 | 500  | 5/16-18 | 2     | 1/4   | 3/8 |
| IL84-5Bx1/2                                        | IL84-5BSx1/2 | 500  | 5/16-18 | 2     | 1/2   | 3/8 |
| IL84-5Bx1/2-HX-SL                                  |              | 500  | 5/16-18 | 2     | 1/2   | 3/8 |
| IL84-5Bx3/4                                        | IL84-5BSx3/4 | 500  | 5/16-18 | 2     | 3/4   | 3/8 |
| IL84-5Bx3/4-HX-SL                                  |              | 500  | 5/16-18 | 2     | 3/4   | 3/8 |
| IL84-5Bx1                                          | IL84-5BSx1   | 500  | 5/16-18 | 2     | 1     | 3/8 |
| IL84-5Bx1-HX-SL                                    |              | 500  | 5/16-18 | 2     | 1     | 3/8 |
| IL84-5Bx125-HX-SL                                  |              | 500  | 5/16-18 | 2     | 1-1/4 | 3/8 |
| IL84-5Bx125                                        | IL84-5BSx125 | 500  | 5/16-18 | 2     | 1-1/4 | 3/8 |
| IL84-5Bx175                                        | IL84-5BSx175 | 500  | 5/16-18 | 2     | 1-3/4 | 3/8 |
| IL84-5Bx175-HX-SL                                  |              | 500  | 5/16-18 | 2     | 1-3/4 | 3/8 |
| IL84-5Bx225-HX-SL                                  |              | 500  | 5/16-18 | 2     | 2-1/4 | 3/8 |



# INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com



Web: www.equipmentknobs.com www.iec-corp.com

## KNOBS

### LOW PROFILE KNOBS

### Low Profile Knobs


These low profile shoulderless knobs have a black polypropylene base and grip ridges on the outside diameter. The threaded studs are available in zinc-plated steel or stainless steel. Other colors also available: clear, white, brown, blue, red, gray, etc.

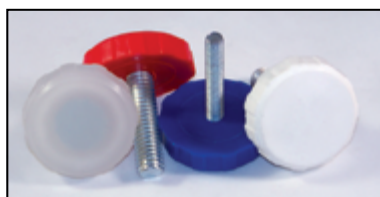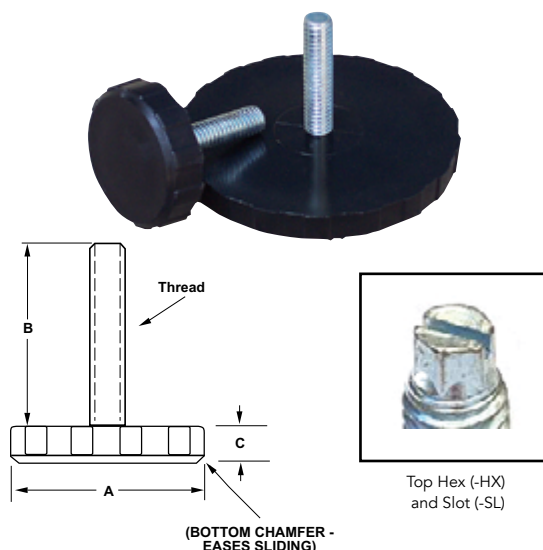

Many colors available as custom option.

### Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used as a "thru-hole" knob or a locking nut.

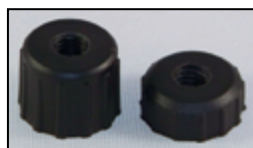

\* Patent Pending

#### BLACK NYLON THREADED KNOB HUBS

| P/N              | THREAD  | DIA. | HEIGHT |
|------------------|---------|------|--------|
| IL80-HUB-4-THRU  | 1/4-20  | 1"   | 3/8    |
| IL80-HUB-5-THRU  | 5/16-18 | 1"   | 3/8    |
| IL80-HUB-6-THRU  | 3/8-16  | 1"   | 3/8    |
| IL80A-HUB-4-THRU | 1/4-20  | 1"   | 3/4    |
| IL80A-HUB-5-THRU | 5/16-18 | 1"   | 3/4    |
| IL80A-HUB-6-THRU | 3/8-16  | 1"   | 3/4    |

| Steel                                       | SS           | Load | Thread  | A     | B     | C   |
|---------------------------------------------|--------------|------|---------|-------|-------|-----|
| Steel and Stainless Steel Knob Style Glides |              |      |         |       |       |     |
| IL84-6Bx1/4                                 | IL84-6BSx1/4 | 1000 | 3/8-16  | 2     | 1/4   | 3/8 |
| IL84-6Bx1/2                                 | IL84-6BSx1/2 | 1000 | 3/8-16  | 2     | 1/2   | 3/8 |
| IL84-6Bx1/2-HX-SL                           |              | 1000 | 3/8-16  | 2     | 1/2   | 3/8 |
| IL84-6Bx3/4-HX-SL                           |              | 1000 | 3/8-16  | 2     | 3/4   | 3/8 |
| IL84-6Bx1                                   | IL84-6BSx1   | 1000 | 3/8-16  | 2     | 1     | 3/8 |
| IL84-6Bx1-HX-SL                             |              | 1000 | 3/8-16  | 2     | 1     | 3/8 |
| IL84-6Bx125                                 | IL84-6BSx125 | 1000 | 3/8-16  | 2     | 1-1/4 | 3/8 |
| IL84-6Bx125-HX-SL                           |              | 1000 | 3/8-16  | 2     | 1-1/4 | 3/8 |
| IL84-6Bx150                                 | IL84-6BSx150 | 1000 | 3/8-16  | 2     | 1-1/2 | 3/8 |
| IL84-6Bx175-HX-SL                           |              | 1000 | 3/8-16  | 2     | 1-3/4 | 3/8 |
| IL84-6Bx175                                 | IL84-6BSx175 | 1000 | 3/8-16  | 2     | 1-3/4 | 3/8 |
| IL84-6Bx238                                 | IL84-6BSx238 | 1000 | 3/8-16  | 2     | 2-3/8 | 3/8 |
| IL84-6Bx238-SL                              |              | 1000 | 3/8-16  | 2     | 2-3/8 | 3/8 |
| IL84-6Bx238-HX-SL                           |              | 1000 | 3/8-16  | 2     | 2-3/8 | 3/8 |
| IL84-6Bx275-HX-SL                           |              | 1000 | 3/8-16  | 2     | 2-3/4 | 3/8 |
| IL84-6Bx338-HX-SL                           |              | 1000 | 3/8-16  | 2     | 3-3/8 | 3/8 |
| IL84-7Bx3/4                                 | IL84-7BSx3/4 | 1000 | 1/2-13  | 2     | 3/4   | 3/8 |
| IL84-7Bx1                                   | IL84-7BSx1   | 1000 | 1/2-13  | 2     | 1     | 3/8 |
| IL84-7Bx125                                 | IL84-7BSx125 | 1000 | 1/2-13  | 2     | 1-1/4 | 3/8 |
| IL84-7Bx150                                 | IL84-7BSx150 | 1000 | 1/2-13  | 2     | 1-1/2 | 3/8 |
| IL84-7Bx238                                 |              | 1000 | 1/2-13  | 2     | 2-3/8 | 3/8 |
| IL86-4Bx1/4                                 | IL86-4BSx1/4 | 100  | 1/4-20  | 2-1/2 | 1/4   | 3/8 |
| IL86-4Bx1/2                                 | IL86-4BSx1/2 | 100  | 1/4-20  | 2-1/2 | 1/2   | 3/8 |
| IL86-4Bx1/2-HX-SL                           |              | 100  | 1/4-20  | 2-1/2 | 1/2   | 3/8 |
| IL86-4Bx3/4                                 | IL86-4BSx3/4 | 100  | 1/4-20  | 2-1/2 | 3/4   | 3/8 |
| IL86-4Bx3/4-HX-SL                           |              | 100  | 1/4-20  | 2-1/2 | 3/4   | 3/8 |
| IL86-4Bx1                                   | IL86-4BSx1   | 100  | 1/4-20  | 2-1/2 | 1     | 3/8 |
| IL86-4Bx1-HX-SL                             |              | 100  | 1/4-20  | 2-1/2 | 1     | 3/8 |
| IL86-4Bx125                                 | IL86-4BSx125 | 100  | 1/4-20  | 2-1/2 | 1-1/4 | 3/8 |
| IL86-4Bx125-HX-SL                           |              | 100  | 1/4-20  | 2-1/2 | 1-1/4 | 3/8 |
| IL86-4Bx150                                 | IL86-4BSx150 | 100  | 1/4-20  | 2-1/2 | 1-1/2 | 3/8 |
| IL86-4Bx175                                 | IL86-4BSx175 | 100  | 1/4-20  | 2-1/2 | 1-3/4 | 3/8 |
| IL86-4Bx175-HX-SL                           |              | 100  | 1/4-20  | 2-1/2 | 1-3/4 | 3/8 |
| IL86-4Bx2                                   | IL86-4BSx2   | 100  | 1/4-20  | 2-1/2 | 2     | 3/8 |
| IL86-4Bx275                                 | IL86-4BSx275 | 100  | 1/4-20  | 2-1/2 | 2-3/4 | 3/8 |
| IL86-5Bx1/4                                 | IL86-5BSx1/4 | 500  | 5/16-18 | 2-1/2 | 1/4   | 3/8 |
| IL86-5Bx1/2                                 | IL86-5BSx1/2 | 500  | 5/16-18 | 2-1/2 | 1/2   | 3/8 |
| IL86-5Bx1/2-HX-SL                           |              | 500  | 5/16-18 | 2-1/2 | 1/2   | 3/8 |
| IL86-5Bx3/4                                 | IL86-5BSx3/4 | 500  | 5/16-18 | 2-1/2 | 3/4   | 3/8 |
| IL86-5Bx3/4-HX-SL                           |              | 500  | 5/16-18 | 2-1/2 | 3/4   | 3/8 |
| IL86-5Bx1                                   | IL86-5BSx1   | 500  | 5/16-18 | 2-1/2 | 1     | 3/8 |
| IL86-5Bx1-HX-SL                             |              | 500  | 5/16-18 | 2-1/2 | 1     | 3/8 |
| IL86-5Bx125-HX-SL                           |              | 500  | 5/16-18 | 2-1/2 | 1-1/4 | 3/8 |
| IL86-5Bx125                                 | IL86-5BSx125 | 500  | 5/16-18 | 2-1/2 | 1-1/4 | 3/8 |
| IL86-5Bx175                                 | IL86-5BSx175 | 500  | 5/16-18 | 2-1/2 | 1-3/4 | 3/8 |
| IL86-5Bx175-HX-SL                           |              | 500  | 5/16-18 | 2-1/2 | 1-3/4 | 3/8 |
| IL86-5Bx225-HX-SL                           |              | 500  | 5/16-18 | 2-1/2 | 2-1/4 | 3/8 |
| IL86-6Bx1/4                                 | IL86-6BSx1/4 | 1000 | 3/8-16  | 2-1/2 | 1/4   | 3/8 |
| IL86-6Bx1/2                                 | IL86-6BSx1/2 | 1000 | 3/8-16  | 2-1/2 | 1/2   | 3/8 |
| IL86-6Bx1/2-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 1/2   | 3/8 |
| IL86-6Bx3/4-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 3/4   | 3/8 |
| IL86-6Bx1                                   | IL86-6BSx1   | 1000 | 3/8-16  | 2-1/2 | 1     | 3/8 |
| IL86-6Bx1-HX-SL                             |              | 1000 | 3/8-16  | 2-1/2 | 1     | 3/8 |
| IL86-6Bx125                                 | IL86-6BSx125 | 1000 | 3/8-16  | 2-1/2 | 1-1/4 | 3/8 |
| IL86-6Bx125-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 1-1/4 | 3/8 |
| IL86-6Bx150                                 | IL86-6BSx150 | 1000 | 3/8-16  | 2-1/2 | 1-1/2 | 3/8 |
| IL86-6Bx175-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 1-3/4 | 3/8 |
| IL86-6Bx175                                 | IL86-6BSx175 | 1000 | 3/8-16  | 2-1/2 | 1-3/4 | 3/8 |
| IL86-6Bx238                                 | IL86-6BSx238 | 1000 | 3/8-16  | 2-1/2 | 2-3/8 | 3/8 |
| IL86-6Bx238-SL                              |              | 1000 | 3/8-16  | 2-1/2 | 2-3/8 | 3/8 |
| IL86-6Bx238-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 2-3/8 | 3/8 |
| IL86-6Bx275-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 2-3/4 | 3/8 |
| IL86-6Bx338-HX-SL                           |              | 1000 | 3/8-16  | 2-1/2 | 3-3/8 | 3/8 |
| IL86-7Bx3/4                                 | IL86-7BSx3/4 | 1000 | 1/2-13  | 2-1/2 | 3/4   | 3/8 |
| IL86-7Bx1                                   | IL86-7BSx1   | 1000 | 1/2-13  | 2-1/2 | 1     | 3/8 |
| IL86-7Bx125                                 | IL86-7BSx125 | 1000 | 1/2-13  | 2-1/2 | 1-1/4 | 3/8 |
| IL86-7Bx150                                 | IL86-7BSx150 | 1000 | 1/2-13  | 2-1/2 | 1-1/2 | 3/8 |
| IL86-7Bx238                                 |              | 1000 | 1/2-13  | 2-1/2 | 2-3/8 | 3/8 |


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.equipmentknobs.com | www.iec-corp.com

**KNOBS****LOW PROFILE KNOBS****Low Profile Knobs**

These low profile shoulderless knobs have a black polypropylene base and grip ridges on the outside diameter. The threaded studs are available in zinc-plated steel or stainless steel. Other colors also available: clear, white, brown, blue, red, gray, etc.

Top Hex (-HX)  
and Slot (-SL)

Many colors available as custom option.

| Steel                                       | SS           | Load | Thread  | A | B     | C     |
|---------------------------------------------|--------------|------|---------|---|-------|-------|
| Steel and Stainless Steel Knob Style Glides |              |      |         |   |       |       |
| IL88-4Bx1/4                                 | IL88-4BSx1/4 | 100  | 1/4-20  | 3 | 1/4   | 3/8   |
| IL88-4Bx1/2                                 | IL88-4BSx1/2 | 100  | 1/4-20  | 3 | 1/2   | 3/8   |
| IL88-4Bx1/2-HX-SL                           |              | 100  | 1/4-20  | 3 | 1/2   | 3/8   |
| IL88-4Bx3/4                                 | IL88-4BSx3/4 | 100  | 1/4-20  | 3 | 3/4   | 3/8   |
| IL88-4Bx3/4-HX-SL                           |              | 100  | 1/4-20  | 3 | 3/4   | 3/8   |
| IL88-4Bx1                                   | IL88-4BSx1   | 100  | 1/4-20  | 3 | 1     | 3/8   |
| IL88-4Bx1-HX-SL                             |              | 100  | 1/4-20  | 3 | 1     | 3/8   |
| IL88-4Bx125                                 | IL88-4BSx125 | 100  | 1/4-20  | 3 | 1-1/4 | 3/8   |
| IL88-4Bx125-HX-SL                           |              | 100  | 1/4-20  | 3 | 1-1/4 | 3/8   |
| IL88-4Bx150                                 | IL88-4BSx150 | 100  | 1/4-20  | 3 | 1-1/2 | 3/8   |
| IL88-4Bx175                                 | IL88-4BSx175 | 100  | 1/4-20  | 3 | 1-3/4 | 3/8   |
| IL88-4Bx175-HX-SL                           |              | 100  | 1/4-20  | 3 | 1-3/4 | 3/8   |
| IL88-4Bx2                                   | IL88-4BSx2   | 100  | 1/4-20  | 3 | 2     | 3/8   |
| IL88-4Bx275                                 | IL88-4BSx275 | 100  | 1/4-20  | 3 | 2-3/4 | z 3/8 |
| IL88-5Bx1/4                                 | IL88-5BSx1/4 | 500  | 5/16-18 | 3 | 1/4   | 3/8   |
| IL88-5Bx1/2                                 | IL88-5BSx1/2 | 500  | 5/16-18 | 3 | 1/2   | 3/8   |
| IL88-5Bx1/2-HX-SL                           |              | 500  | 5/16-18 | 3 | 1/2   | 3/8   |
| IL88-5Bx3/4                                 | IL88-5BSx3/4 | 500  | 5/16-18 | 3 | 3/4   | 3/8   |
| IL88-5Bx3/4-HX-SL                           |              | 500  | 5/16-18 | 3 | 3/4   | 3/8   |
| IL88-5Bx1                                   | IL88-5BSx1   | 500  | 5/16-18 | 3 | 1     | 3/8   |
| IL88-5Bx1-HX-SL                             |              | 500  | 5/16-18 | 3 | 1     | 3/8   |
| IL88-5Bx125-HX-SL                           |              | 500  | 5/16-18 | 3 | 1-1/4 | 3/8   |
| IL88-5Bx125                                 | IL88-5BSx125 | 500  | 5/16-18 | 3 | 1-1/4 | 3/8   |
| IL88-5Bx175                                 | IL88-5BSx175 | 500  | 5/16-18 | 3 | 1-3/4 | 3/8   |
| IL88-5Bx175-HX-SL                           |              | 500  | 5/16-18 | 3 | 1-3/4 | 3/8   |
| IL88-5Bx225-HX-SL                           |              | 500  | 5/16-18 | 3 | 2-1/4 | 3/8   |
| IL88-6Bx1/4                                 | IL88-6BSx1/4 | 1000 | 3/8-16  | 3 | 1/4   | 3/8   |
| IL88-6Bx1/2                                 | IL88-6BSx1/2 | 1000 | 3/8-16  | 3 | 1/2   | 3/8   |
| IL88-6Bx1/2-HX-SL                           |              | 1000 | 3/8-16  | 3 | 1/2   | 3/8   |
| IL88-6Bx3/4-HX-SL                           |              | 1000 | 3/8-16  | 3 | 3/4   | 3/8   |
| IL88-6Bx1                                   | IL88-6BSx1   | 1000 | 3/8-16  | 3 | 1     | 3/8   |
| IL88-6Bx1-HX-SL                             |              | 1000 | 3/8-16  | 3 | 1     | 3/8   |
| IL88-6Bx125                                 | IL88-6BSx125 | 1000 | 3/8-16  | 3 | 1-1/4 | 3/8   |
| IL88-6Bx125-HX-SL                           |              | 1000 | 3/8-16  | 3 | 1-1/4 | 3/8   |
| IL88-6Bx150                                 | IL88-6BSx150 | 1000 | 3/8-16  | 3 | 1-1/2 | 3/8   |
| IL88-6Bx175-HX-SL                           |              | 1000 | 3/8-16  | 3 | 1-3/4 | 3/8   |
| IL88-6Bx175                                 | IL88-6BSx175 | 1000 | 3/8-16  | 3 | 1-3/4 | 3/8   |
| IL88-6Bx238                                 | IL88-6BSx238 | 1000 | 3/8-16  | 3 | 2-3/8 | 3/8   |
| IL88-6Bx238-SL                              |              | 1000 | 3/8-16  | 3 | 2-3/8 | 3/8   |
| IL88-6Bx238-HX-SL                           |              | 1000 | 3/8-16  | 3 | 2-3/8 | 3/8   |
| IL88-6Bx275-HX-SL                           |              | 1000 | 3/8-16  | 3 | 2-3/4 | 3/8   |
| IL88-6Bx338-HX-SL                           |              | 1000 | 3/8-16  | 3 | 3-3/8 | 3/8   |
| IL88-7Bx3/4                                 | IL88-7BSx3/4 | 1000 | 1/2-13  | 3 | 3/4   | 3/8   |
| IL88-7Bx1                                   | IL88-7BSx1   | 1000 | 1/2-13  | 3 | 1     | 3/8   |
| IL88-7Bx125                                 | IL88-7BSx125 | 1000 | 1/2-13  | 3 | 1-1/4 | 3/8   |
| IL88-7Bx150                                 | IL88-7BSx150 | 1000 | 1/2-13  | 3 | 1-1/2 | 3/8   |
| IL88-7Bx238                                 |              | 1000 | 1/2-13  | 3 | 2-3/8 | 3/8   |

**Low Profile Socket Type Knobs**

These low-profile polypropylene knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.



| PN (brass)     | PN (hex nut) | PN(molded) | Thread      | Base Dia. | Load (lbs.) |
|----------------|--------------|------------|-------------|-----------|-------------|
| IL83-4B-BI     | IL83-4B-HN   | IL83-4B-MT | 1/4-20      | 1-1/2     | 100         |
| IL83-5B-BI     | IL83-5B-HN   | IL83-5B-MT | 5/16-18     | 1-1/2     | 250         |
| IL83-6B-BI     | IL83-6B-HN   | IL83-6B-MT | 3/8-16      | 1-1/2     | 250         |
| IL85-4B-BI     | IL85-4B-HN   | IL85-4B-MT | 1/4-20      | 2         | 100         |
| IL85-5B-BI     | IL85-5B-HN   | IL85-5B-MT | 5/16-18     | 2         | 250         |
| IL85-6B-BI     | IL85-6B-HN   | IL85-6B-MT | 3/8-16      | 2         | 250         |
| IL87-4B-BI     | IL87-4B-HN   | IL87-4B-MT | 1/4-20      | 2-1/2     | 100         |
| IL87-5B-BI     | IL87-5B-HN   | IL87-5B-MT | 5/16-18     | 2-1/2     | 250         |
| IL87-6B-BI     | IL87-6B-HN   | IL87-6B-MT | 3/8-16      | 2-1/2     | 250         |
| IL89-4B-BI     | IL89-4B-HN   | IL89-4B-MT | 1/4-20      | 3         | 100         |
| IL89-5B-BI     | IL89-5B-HN   | IL89-5B-MT | 5/16-18     | 3         | 250         |
| IL89-6B-BI     | IL89-6B-HN   | IL89-6B-MT | 3/8-16      | 3         | 250         |
| PN (PVC)       | Thread       | Base Dia.  | Load (lbs.) |           |             |
| IL83-4B-HN-PVC | 1/4-20       | 1-1/2      | 75          |           |             |
| IL83-5B-HN-PVC | 5/16-18      | 1-1/2      | 75          |           |             |
| IL83-6B-HN-PVC | 3/8-16       | 1-1/2      | 75          |           |             |





# INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

## KNOBS

### LOW PROFILE KNOBS

#### Low Profile Knobs

These low profile shoulderless knobs have a black polypropylene base and grip ridges on the outside diameter. The threaded studs are available in zinc-plated steel or stainless steel. Other colors also available: clear, white, brown, blue, red, gray, etc.



Top Hex (-HX)  
and Slot (-SL)



Many colors available as custom option.

| Steel                                                       | SS            | Load | Thread | A  | B  | C  |
|-------------------------------------------------------------|---------------|------|--------|----|----|----|
| <b>METRIC - Steel and Stainless Steel Knob Style Glides</b> |               |      |        |    |    |    |
| IL82-M6Bx6                                                  | IL82-M6BSx6   | 100  | M6     | 38 | 6  | 10 |
| IL82-M6Bx12                                                 | IL82-M6BSx12  | 100  | M6     | 38 | 12 | 10 |
| IL82-M6Bx25                                                 | IL82-M6BSx25  | 100  | M6     | 38 | 25 | 10 |
| IL82-M8Bx6                                                  | IL82-M8BSx6   | 500  | M8     | 38 | 6  | 10 |
| IL82-M8Bx12                                                 | IL82-M8BSx12  | 500  | M8     | 38 | 12 | 10 |
| IL82-M8Bx25                                                 | IL82-M8BSx25  | 500  | M8     | 38 | 25 | 10 |
| IL82-M8Bx45                                                 | IL82-M8BSx45  | 500  | M8     | 38 | 45 | 10 |
| IL82-M10Bx15                                                | IL82-M10BSx15 | 1000 | M10    | 38 | 15 | 10 |
| IL82-M10Bx20                                                | IL82-M10BSx20 | 1000 | M10    | 38 | 20 | 10 |
| IL82-M10Bx25                                                | IL82-M10BSx25 | 1000 | M10    | 38 | 25 | 10 |
| IL82-M10Bx40                                                | IL82-M10BSx40 | 1000 | M10    | 38 | 40 | 10 |
| IL84-M6Bx6                                                  | IL84-M6BSx6   | 100  | M6     | 51 | 6  | 10 |
| IL84-M6Bx12                                                 | IL84-M6BSx12  | 100  | M6     | 51 | 12 | 10 |
| IL84-M6Bx25                                                 | IL84-M6BSx25  | 100  | M6     | 51 | 25 | 10 |
| IL84-M8Bx6                                                  | IL84-M8BSx6   | 500  | M8     | 51 | 6  | 10 |
| IL84-M8Bx12                                                 | IL84-M8BSx12  | 500  | M8     | 51 | 12 | 10 |
| IL84-M8Bx25                                                 | IL84-M8BSx25  | 500  | M8     | 51 | 25 | 10 |
| IL84-M8Bx45                                                 | IL84-M8BSx45  | 500  | M8     | 51 | 45 | 10 |
| IL84-M10Bx15                                                | IL84-M10BSx15 | 1000 | M10    | 51 | 15 | 10 |
| IL84-M10Bx20                                                | IL84-M10BSx20 | 1000 | M10    | 51 | 20 | 10 |
| IL84-M10Bx25                                                | IL84-M10BSx25 | 1000 | M10    | 51 | 25 | 10 |
| IL84-M10Bx40                                                | IL84-M10BSx40 | 1000 | M10    | 51 | 40 | 10 |
| IL86-M6Bx6                                                  | IL86-M6BSx6   | 100  | M6     | 64 | 6  | 10 |
| IL86-M6Bx12                                                 | IL86-M6BSx12  | 100  | M6     | 64 | 12 | 10 |
| IL86-M6Bx25                                                 | IL86-M6BSx25  | 100  | M6     | 64 | 25 | 10 |
| IL86-M8Bx6                                                  | IL86-M8BSx6   | 500  | M8     | 64 | 6  | 10 |
| IL86-M8Bx12                                                 | IL86-M8BSx12  | 500  | M8     | 64 | 12 | 10 |
| IL86-M8Bx25                                                 | IL86-M8BSx25  | 500  | M8     | 64 | 25 | 10 |
| IL86-M8Bx45                                                 | IL86-M8BSx45  | 500  | M8     | 64 | 45 | 10 |
| IL86-M10Bx15                                                | IL86-M10BSx15 | 1000 | M10    | 64 | 15 | 10 |
| IL86-M10Bx20                                                | IL86-M10BSx20 | 1000 | M10    | 64 | 20 | 10 |
| IL86-M10Bx25                                                | IL86-M10BSx25 | 1000 | M10    | 64 | 25 | 10 |
| IL86-M10Bx40                                                | IL86-M10BSx40 | 1000 | M10    | 64 | 40 | 10 |
| IL88-M6Bx6                                                  | IL88-M6BSx6   | 100  | M6     | 76 | 6  | 10 |
| IL88-M6Bx12                                                 | IL88-M6BSx12  | 100  | M6     | 76 | 12 | 10 |
| IL88-M6Bx25                                                 | IL88-M6BSx25  | 100  | M6     | 76 | 25 | 10 |
| IL88-M8Bx6                                                  | IL88-M8BSx6   | 500  | M8     | 76 | 6  | 10 |
| IL88-M8Bx12                                                 | IL88-M8BSx12  | 500  | M8     | 76 | 12 | 10 |
| IL88-M8Bx25                                                 | IL88-M8BSx25  | 500  | M8     | 76 | 25 | 10 |
| IL88-M8Bx45                                                 | IL88-M8BSx45  | 500  | M8     | 76 | 45 | 10 |
| IL88-M10Bx15                                                | IL88-M10BSx15 | 1000 | M10    | 76 | 15 | 10 |
| IL88-M10Bx20                                                | IL88-M10BSx20 | 1000 | M10    | 76 | 20 | 10 |
| IL88-M10Bx25                                                | IL88-M10BSx25 | 1000 | M10    | 76 | 25 | 10 |
| IL88-M10Bx40                                                | IL88-M10BSx40 | 1000 | M10    | 76 | 40 | 10 |

**36A - Metric Knob Style (PVC Base)** The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

| Steel                                                                        | SS                | Load | Thread | A  | B  | C  |
|------------------------------------------------------------------------------|-------------------|------|--------|----|----|----|
| <b>36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)</b> |                   |      |        |    |    |    |
| IL82-M6Bx6-PVC                                                               | IL82-M6BSx6-PVC   | 100  | M6     | 38 | 6  | 10 |
| IL82-M6Bx12-PVC                                                              | IL82-M6BSx12-PVC  | 100  | M6     | 38 | 12 | 10 |
| IL82-M6Bx25-PVC                                                              | IL82-M6BSx25-PVC  | 100  | M6     | 38 | 25 | 10 |
| IL82-M8Bx6-PVC                                                               | IL82-M8BSx6-PVC   | 100  | M8     | 38 | 6  | 10 |
| IL82-M8Bx12-PVC                                                              | IL82-M8BSx12-PVC  | 100  | M8     | 38 | 12 | 10 |
| IL82-M8Bx25-PVC                                                              | IL82-M8BSx25-PVC  | 100  | M8     | 38 | 25 | 10 |
| IL82-M8Bx45-PVC                                                              | IL82-M8BSx45-PVC  | 100  | M8     | 38 | 45 | 10 |
| IL82-M10Bx15-PVC                                                             | IL82-M10BSx15-PVC | 100  | M10    | 38 | 15 | 10 |
| IL82-M10Bx20-PVC                                                             | IL82-M10BSx20-PVC | 100  | M10    | 38 | 20 | 10 |
| IL82-M10Bx25-PVC                                                             | IL82-M10BSx25-PVC | 100  | M10    | 38 | 25 | 10 |
| IL82-M10Bx40-PVC                                                             | IL82-M10BSx40-PVC | 100  | M10    | 38 | 40 | 10 |
| IL84-M6Bx6-PVC                                                               | IL84-M6BSx6-PVC   | 100  | M6     | 51 | 6  | 10 |
| IL84-M6Bx12-PVC                                                              | IL84-M6BSx12-PVC  | 100  | M6     | 51 | 12 | 10 |
| IL84-M6Bx25-PVC                                                              | IL84-M6BSx25-PVC  | 100  | M6     | 51 | 25 | 10 |
| IL84-M8Bx6-PVC                                                               | IL84-M8BSx6-PVC   | 100  | M8     | 51 | 6  | 10 |
| IL84-M8Bx12-PVC                                                              | IL84-M8BSx12-PVC  | 100  | M8     | 51 | 12 | 10 |
| IL84-M8Bx25-PVC                                                              | IL84-M8BSx25-PVC  | 100  | M8     | 51 | 25 | 10 |
| IL84-M8Bx45-PVC                                                              | IL84-M8BSx45-PVC  | 100  | M8     | 51 | 45 | 10 |
| IL84-M10Bx15-PVC                                                             | IL84-M10BSx15-PVC | 100  | M10    | 51 | 15 | 10 |
| IL84-M10Bx20-PVC                                                             | IL84-M10BSx20-PVC | 100  | M10    | 51 | 20 | 10 |
| IL84-M10Bx25-PVC                                                             | IL84-M10BSx25-PVC | 100  | M10    | 51 | 25 | 10 |
| IL84-M10Bx40-PVC                                                             | IL84-M10BSx40-PVC | 100  | M10    | 51 | 40 | 10 |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

## KNOBS

### 2 LOBE KNOBS


## 2 Lobe Knobs

Phenolic 2-lobe knobs are offered with a brass threaded insert, a zinc-plated steel stud or a stainless steel stud.

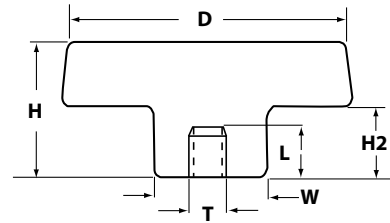


### PHENOLIC 2 LOBE KNOB WITH BRASS THREAD INSERT

| P/N        | DIA. | Height | Width | H2  | Thread  | Length |
|------------|------|--------|-------|-----|---------|--------|
| IL422-4X38 | 2    | 1-1/8  | 3/4   | 1/2 | 1/4-20  | 3/8    |
| IL422-5X50 | 2    | 1-1/8  | 3/4   | 1/2 | 5/16-18 | 1/2    |
| IL422-6X50 | 2    | 1-1/8  | 3/4   | 1/2 | 3/8-16  | 1/2    |

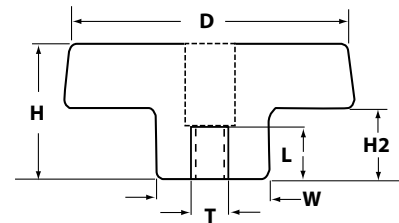

### NYLON 2 LOBE KNOB THRU HOLE WITH STEEL THREADED INSERT

| P/N           | DIA.  | Height | Width | H2  | Thread  | Length |
|---------------|-------|--------|-------|-----|---------|--------|
| IL422-4X38-TH | 1-1/8 | 3/4    | 1/2   | 1/8 | 1/4-20  | 3/8    |
| IL422-4X50-TH | 1-1/8 | 3/4    | 1/2   | 1/8 | 1/4-20  | 1/2    |
| IL422-4X44-TH | 2-1/2 | 1-1/3  | 3/4   | 1/2 | 1/4-20  | 7/16   |
| IL422-5X50-TH | 2-1/2 | 1-1/3  | 3/4   | 1/2 | 5/16-18 | 1/2    |
| IL422-6X62-TH | 2-1/2 | 1-1/3  | 3/4   | 1/2 | 3/8-16  | 5/8    |

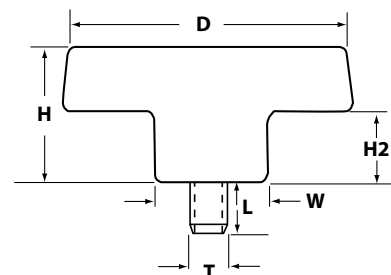

### PHENOLIC 2 LOBE KNOB WITH ZINC PLATED STEEL STUD

| P/N        | DIA. | Height | Width | H2  | Thread  | Length |
|------------|------|--------|-------|-----|---------|--------|
| IL423-4X50 | 1    | 5/8    | 1/2   | 1/8 | 1/4-20  | 1/2    |
| IL423-5X75 | 2    | 1-1/8  | 3/4   | 1/2 | 5/16-18 | 3/4    |
| IL423-6X1  | 2    | 1-1/8  | 3/4   | 1/2 | 3/8-16  | 1      |



## INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.equipmentknobs.com | www.iec-corp.com

### KNOBS

#### 2 LOBE KNOBS

### 2 Lobe Knobs

Phenolic 2 lobe knobs are offered with a brass threaded insert, a zinc-plated steel stud or a stainless steel stud.

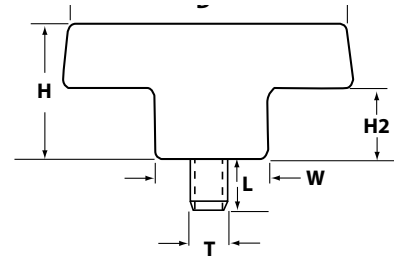

#### PHENOLIC 2 LOBE KNOB WITH 303 STAINLESS STEEL STUD

| P/N           | Dia. | Height | Width | H2  | Thread  | Length |
|---------------|------|--------|-------|-----|---------|--------|
| IL423-4X75-SS | 2    | 1-1/8  | 3/4   | 1/2 | 1/4-20  | 3/4    |
| IL423-5X50-SS | 2    | 1-1/8  | 3/4   | 1/2 | 5/16-18 | 1/2    |
| IL423-5X1-SS  | 2    | 1-1/8  | 3/4   | 1/2 | 5/16-18 | 1      |
| IL423-6X1-SS  | 2    | 1-1/8  | 3/4   | 1/2 | 3/8-16  | 1      |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.equipmentknobs.com | www.iec-corp.com

**KNOBS & HANDLES**

**QUOTE REQUEST**

## Your Contact Information

|                        |                      |
|------------------------|----------------------|
| NAME:                  | TITLE:               |
| <input type="text"/>   | <input type="text"/> |
| COMPANY:               | E-MAIL:              |
| <input type="text"/>   | <input type="text"/> |
| STREET ADDRESS OR POB: | CITY:                |
| <input type="text"/>   | <input type="text"/> |
| STATE:                 | ZIP CODE:            |
| <input type="text"/>   | <input type="text"/> |
| PHONE:                 | FAX:                 |
| <input type="text"/>   | <input type="text"/> |

## Standard Product Request

| ITEM # | IEC PART NUMBER      | DESCRIPTION          | QUANTITY             |
|--------|----------------------|----------------------|----------------------|
| 1      | <input type="text"/> | <input type="text"/> | <input type="text"/> |

*Comments/Special Instructions:*

| ITEM # | IEC PART NUMBER      | DESCRIPTION          | QUANTITY             |
|--------|----------------------|----------------------|----------------------|
| 2      | <input type="text"/> | <input type="text"/> | <input type="text"/> |

*Comments/Special Instructions:*

| ITEM # | IEC PART NUMBER      | DESCRIPTION          | QUANTITY             |
|--------|----------------------|----------------------|----------------------|
| 3      | <input type="text"/> | <input type="text"/> | <input type="text"/> |

*Comments/Special Instructions:*

**PLEASE FAX THIS FORM TO: 562-498-2275**



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: [sales@iec-corp.com](mailto:sales@iec-corp.com)

Web: [www.equipmentknobs.com](http://www.equipmentknobs.com) | [www.iec-corp.com](http://www.iec-corp.com)

## **Warranty & Disclaimer**

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

© Copyright 2019. International Equipment Components, Inc. All rights reserved.

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**HEAVY-DUTY LEVELERS**

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL  
ALIGN  
STABILIZE  
PROTECT**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**MEDIUM-DUTY LEVELERS**

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL  
ALIGN  
STABILIZE  
PROTECT**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**LIGHT-DUTY LEVELERS**

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL  
ALIGN  
STABILIZE  
PROTECT**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**METRIC LEVELERS**

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL  
ALIGN  
STABILIZE  
PROTECT**

Ph. 562.597.4533

## INTERNATIONAL EQUIPMENT COMPONENTS, INC.

2201 E. Willow Street, D-104,

Signal Hill, CA 90755

Email: sales@iec-corp.com

Phone: 562-597-4533

Fax: 562-498-2275

Web: www.iec-corp.com

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**KNOB & HANDLE**



**CLAMP  
ADJUST  
STABILIZE  
FASTEN**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**CAP & PLUG PRODUCTS**



**FEET  
SLIDE  
PROTECT  
FINISH**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**SURFACE PROTECTION**  
SLIDERS, GRIPPERS & FELT



**CUSHION  
QUIET  
SLIDE  
PROTECT**

Ph. 562.597.4533

**IEC** INTERNATIONAL EQUIPMENT COMPONENTS, INC.  
www.levelingmounts.com & www.iec-corp.com

**LEG & CASTER PRODUCTS**



**LEVEL  
EXTEND  
SUPPORT  
ROLL**

Ph. 562.597.4533