





INTERNATIONAL EQUIPMENT COMPONENTS, INC.

www.levelingmounts.com & www.iec-corp.com

LIGHT-DUTY LEVELERS

ANY THREAD . . . ANY LENGTH . . . ANY BASE

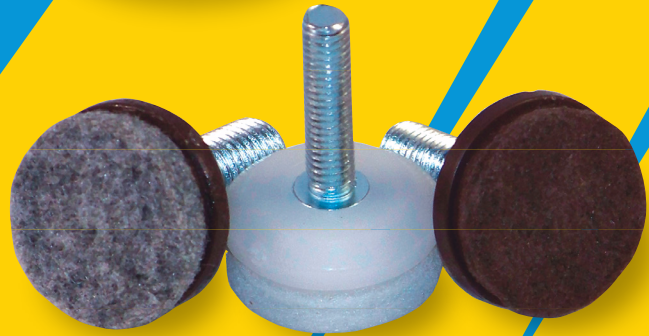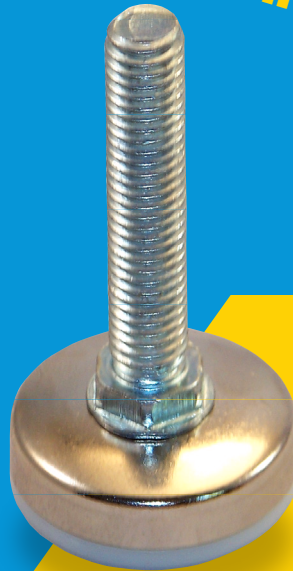

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

Welcome...

We are pleased to introduce our newly expanded line of light-duty levelers and accessories for leveling, gliding, floor protection and noise control. This light duty product line includes threaded leveling glides, tubing glides, nail glides and threaded inserts.

We've included an overview of the complete line of glides and accessories, a product selection guide and product specification tables with dimensions and load ratings for easily finding an off-the-shelf product for your application. A quote request form has been included for requesting OEM pricing on standard and custom products.

IEC's mission since 1992 has been to lead the equipment component industry in meeting the needs of OEMs, furniture and product manufacturers with a broad range of products that match the high standards and cost requirements of our customers. We have specialized in providing solutions for product and surface protection, gliding and leveling by offering products in many materials with features most commonly requested by design engineers. Our engineering department is always happy to assist you with selecting from thousands of standard off-the-shelf products the best solution for your application.

We recognize the needs in OEM manufacturing for high performance products, attractive designs and competitive pricing. We have made every effort possible to address these needs in this catalog. We now offer the industry's widest range of products for surface protection, leveling, gliding, sliding, vibration and noise control.

Paying attention to what our customers have been saying for over 20 years has enabled IEC to become the leader in equipment component solutions design. This dedicated effort has resulted in the development of thousands of new products, stronger customer service and assurance that the products you specify today will be available for the duration of your product life-cycle.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

CONTENTS

WELCOME	
CONTENTS	3-5
PRODUCT OVERVIEW	6-13
SELECTION GUIDE	14
LIGHT DUTY THREADED LEVELING GLIDES	
Non-Swivel, Free-Turning, Plastic Base Glides	15
Swivel, Plastic Base Glides	15
Non-Swivel, Plastic Base Glides	15
Non-Skid, Black Vinyl Base Glides	16
Threaded Sliders, (Inch & Metric)	16
Non-Swivel, Steel Base Glides	16
Snap On Nylon Glide Caps	16
Long Stem, Black Plastic Base Glides	17
Carpet Gripper Glide	17
Molded Hex, Black & Clear Plastic Base Glides	17
Low-Profile, Black Plastic Base Glides	17
Threaded Felt Pads	17
Fixed, Nylon Base, Rubber Base, PTFE Base, Steel Base, Felt Base Glides (inch & metric)	17
Swivel, Nylon Base, Rubber Base, PTFE Base Glides (inch & metric)	17
Swivel, Steel Base, Felt Base Glides (inch & metric)	17
Threaded Fixed Nylon Base Leveling Glides	18-19
Threaded Swivel Nylon Base Leveling Glides	20-21
Oval, White Plastic Base Glides	22
Clear, Plastic Base Glides (Inch & Metric)	22
Brown Plastic, Bottle Cap Base Glides	22
Metal Swivel Base Glides	23
Plastic Swivel Base Glides	23
Black Plastic Base, Hex Glides	23
PE Cap for Hex Glides	23
Steel Hex Glides - Metric	23
Steel Hex Glides - with Top Hex & Slot	23
Medium Duty, Zinc Plated Steel Hex Glides	23
Light Duty, Zinc Plated, Stamped Hex Glides	24
Medium Duty Vibration Glides	24
Light Duty, Nickel Plated, Slotted Swivel Glides — Inch & Metric	24
Slotted Swivel Glide and Bracket Set	24
Thick Base Glide	24
Self-Adjusting Levelers	25
Table Wedge	25
Big Foot Leveler	25
Stainless Steel Swivel Leveling Glide	25
Zinc Plated Steel Vibration Levelers	25
ADJUSTABLE LEGS & BELL GLIDES	
Adjustable Legs	26-28
Stainless Steel Round & Square Tubing Feet	26
Plastic Bell Glides	29
KNOB STYLE LEVELING GLIDES	
Knob Style Glides Socket Style	30
Threaded Nylon Knob Hubs	30-33
Knob Style Glides Stud Style	31-35
NAIL GLIDES	
Steel Base Nail Glide with Rubber Cushion	36
White & Black Flat Plastic Base Nail Glide	36
3 Prong Zinc Base Nail Glide	36
Plastic White Nylon Base Nail Glides with Rubber Cushion	36
Brown Flat Plastic Base Nail Glide	36
Swivel Nail Glide	36
Oval Nickel Base Nail Glide	36



Contents (cont'd.)

NAIL GLIDES (cont'd.)

Brown & White Oval Plastic Base Nail Glide	36
Regular Nail Felt Glides.....	37
Regular Nail Felt Glides - Oval.....	37
Rivet Nail Felt Glides.....	37
Nail In Sliders.....	37
Half Spherical Nail In Bumpers.....	37
Dual Nail Glides.....	37
PTFE Nail Sliders	37
Wood Screw PTFE Glides & Felt Pads.....	38
Cabinet Feet & Thermoplastic Bumpers	38

TUBING GLIDES AND INSERTS

Round Tubing Glides (Steel or Nylon Base)	39
Square Tubing Glides (Steel or Nylon Base).....	39
Non-Swivel & Swivel Tubing Glides (Nylon, Steel and Felt Base)	39
Octagon Levelers & Tube Insert Sets	40
Angled Tube Glides.....	40
Domed Tube Caps (Plug Type) Square.....	40
Domed Tube Caps (Plug Type) Round	40

THREADED TUBE ENDS

Star Type Threaded Tube Ends	41
Star Type Tube Connectors	41

SLED GLIDES

Clear Plastic Sled Glides and Plastic with Felt.....	42
Single Prong Sled Glides.....	42

WELD NUTS, T-NUTS, ROUND & RECTANGULAR NUTS & BRACKETS

Weld Nuts, Round Base	43
T-Nuts, Straight Barrel (3 Prong).....	43
T-Nuts, Straight Barrel (4 Prong).....	43
Corner, Side & Bottom Brackets.....	43
Round Nuts with Holes (2 or 3 Holes)	44
Propeller Nuts.....	45
Rectangular Nuts with Holes	46
Rectangular T-Nuts	46

VIBRATION CONTROL BUMPERS, ANTI-SKID FEET & SLIDERS

Half Spherical Nail-On Bumpers & Feet.....	47
Non-Padded (solid) Peel & Stick Sliders.....	47
Nail In Sliders.....	48
PTFE Nail Glides with Rubber Cushion	48
Slip On Sliders	48
Wood Screw Non-Skid Gripper Pads	48



Contents (cont'd.)

VIBRATION CONTROL BUMPERS, ANTI-SKID FEET & SLIDERS (cont'd.)

Peel & Stick Sliders — Regular Duty (Round) 49

Peel & Stick Sliders — Regular Duty (Square) 49

Peel & Stick Sliders — Regular Duty (Rectangular)..... 50

Peel & Stick Sliders —Regular Duty (Triangular)..... 50

Reusable Foam Sliders 50

Peel & Stick Sliders — Commercial Duty (Round) 51

Peel & Stick Sliders — Commercial Duty (Rectangle)..... 51

Peel & Stick Slider Wraps 51

Peel & Stick Clear Carpet Sliders 52

Slip On Felt..... 52

Wood Screw Sliders..... 52

FLOOR PROTECTION

Felt Cup “Peel & Stick” Floor Protectors 53

Stretch Over Felt Floor Protectors..... 53

Threaded Sliders — Inch & Metric 53

Clear Vinyl Stretch Sleeve Floor Protectors 54

Clear PVC Felt Glides 54

Vinyl Replacement Chair Tips (with and without felt) 54

Sled Glides — Clear Plastic and Plastic with Felt 54

Rubber Crutch Tip Glides..... 55

RFQ FAX-BACK FORM

Request A Quote Form 56

Warranty and Disclaimer..... 57



LEVELERS, GLIDES & FEET



Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Light Duty, (Non-Swivel)
Caster Replacement Glide




Light Duty, Plastic/PVC Base
Free Turning Glide



Light Duty, Plastic Swivel Base
Threaded Glide with Hex



Light Duty, Plastic Swivel Base
Threaded Glide without Hex



Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Light Duty, Metal Swivel Base
Threaded Glide without Hex




Light Duty, (Non-Swivel)
White Plastic Base Glide




Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Light Duty, (Non-Swivel)
Black Vinyl Base Threaded Glide

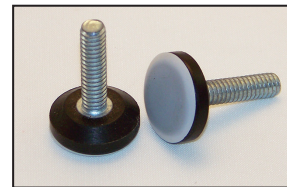

PTFE Base
Threaded Slider Glides



Light Duty, (Non-Swivel)
Steel Base Threaded Glide




Light Duty, (Non-Swivel)
Black Plastic Base Glide



Snap-On Nylon
Glide Caps




Light Duty, Long Stem Black Plastic
Base Threaded Glide




Light Duty, Clear Plastic Base Threaded
Glide



LEVELERS, GLIDES & FEET



Carpet Gripper
Plastic Base Threaded Glides




Light Duty, Molded Hex
Plastic Base Threaded Glide




Light Duty, Molded Hex
Clear Plastic Base Glide




Light Duty, "Bottle Cap"
Brown Plastic Base Glide




Light Duty, Low Profile
Plastic Base Threaded Glide

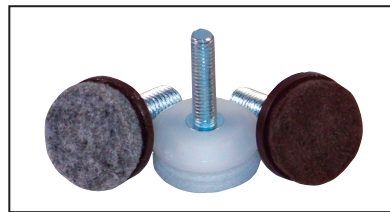

Threaded Felt Pads



Light Duty, Oval
White Plastic Base Glide



Light Duty, "Bottle Cap"
Black Plastic Base Glide



Light Duty, Nylon Base
Fixed Base Threaded Glide



Light Duty, Rubber Base
Fixed Base Threaded Glide



Light Duty, PTFE Base
Fixed Base Threaded Glide



Light Duty, Steel Base
Fixed Base Threaded Glide



Light Duty, Felt Base
Fixed Base Threaded Glide



Light Duty, Nylon Base
Swivel Threaded Glide



Light Duty, Rubber Base
Swivel Threaded Glide



Light Duty, PTFE Base
Swivel Threaded Glide



Light Duty, Steel Base
Swivel Threaded Glide



Light Duty, Felt Base
Swivel Threaded Glide



LEVELERS, GLIDES & FEET




Medium Duty, Zinc Plated
Metal Swivel Base Glide




Medium Duty, Zinc Plated
Metal Swivel Base Glide
with Top Hex




Light Duty, Plastic
Swivel Base Threaded Glide

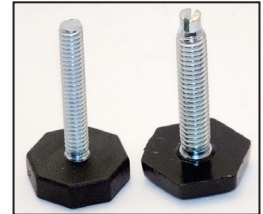

Light Duty, Black Plastic
Base Hex Glides



Medium Duty, Zinc Plated
Steel Hex Glides



PE Cap for Hex Glides



Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Medium Duty Vibration Glides



Light Duty, Slotted
Swivel Threaded Glide



Light Duty, Slotted Swivel
Glides and Bracket Set



Light Duty, Thick
Black H.D.P.E. Base Glide




LEVELERS, GLIDES & FEET



Self-Adjusting Levelers



Table Wedge



Big Foot Leveler



Stainless Steel, Swivel
Leveling Glide



Zinc-Plated Steel
Vibration Leveler



Adjustable Metal Legs




Adjustable Plastic Legs



Plastic Bell Glides




Knob Style Socket Glides

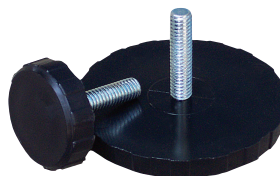

Knob Style Stud Glides



Knob Style Stud Glides
Nylon Threads

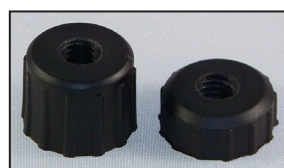


Nylon Knob Hub/Sleeves




Nail Glides




LEVELERS, GLIDES & FEET

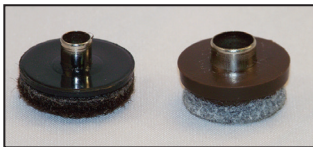


Rivet Nail Felt Glides

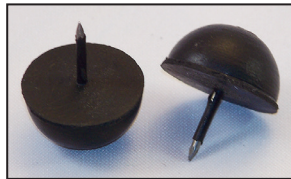

Nail In Rubber Bumpers

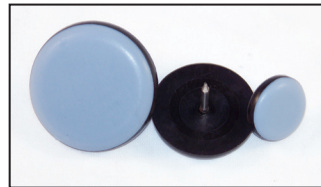


PTFE Nail Sliders

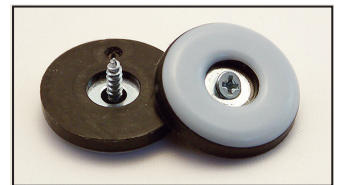

Wood Screw Glides



Wood Screw Felt Pad Glides

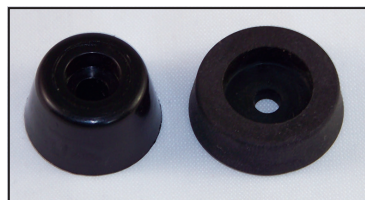

Case Feet Bumpers



Nylon or Steel Base Round
Tubing Glide




Nylon or Steel Base Square
Tubing Glide



Black Plastic Swivel Tubing Glides
Nylon & Felt Base



Black Plastic Swivel Tubing Glides
Steel Base

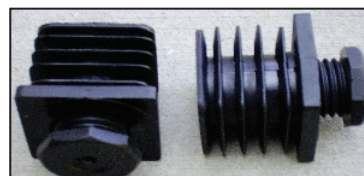


Octogon Levelers and Tube
Insert Sets



Black Plastic Angled
Tube Glides




LEVELERS, GLIDES & FEET

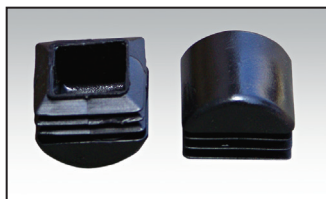


Black Polyethylene Domed
Square Tube Caps



Black Polyethylene Domed
Round Tube Caps



Star Type Threaded Tube Ends

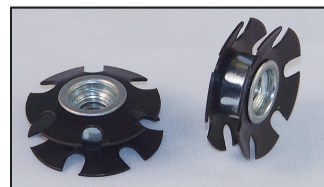

Star Type Tube Connectors



Clear Plastic Sled Glide



Clear Plastic Sled Glide
with Felt



Round Base Weld Nuts




Pronged Tee-Nuts



Brackets



Propeller Nuts



Rectangular Nuts




Rectangular T-Nuts




LEVELERS, GLIDES & FEET



Non-Padded Sliders

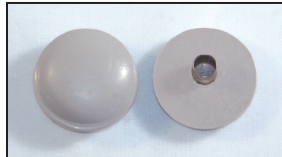

Nail In Sliders

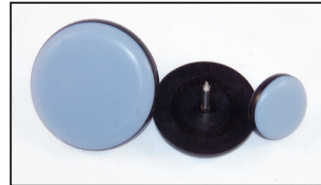

PTFE Nail Glide Sliders



Slip On Sliders



Peel & Stick Sliders



Wood Screw Non-Skid Gripper Pads



Reusable Foam Sliders



Peel & Stick Slider Wraps




Clear Carpet Sliders



Slip On Felt Feet



LEVELERS, GLIDES & FEET

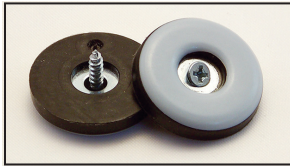


Wood Screw Sliders




Felt Cup Floor Protectors



Stretch Over Felt Floor Protectors

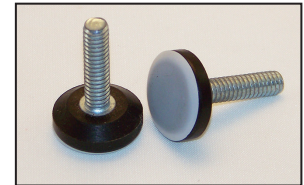

PTFE Base
Threaded Slider Glides



Clear Vinyl Stretch Sleeve
Felt Floor Protectors



Clear PVC Felt Glides



Vinyl Replacement Chair Tips with/
without Felt



Rubber Crutch Tip Glides




Features by Product Family	Threaded Glides	Knob Style Glides	Nail Glides	Tubing Glides	Vibration Mounts
Swivel Base	Yes	N / A	Yes	Yes	N / A
Non-Swivel Base	Yes	Yes	Yes	Yes	Yes
Low Profile Base	Yes	Yes	Yes	N / A	N / A
Plastic Base	Yes	Yes	Yes	N / A	N / A
Rubber & PVC Base	Yes	Yes	Yes	N / A	Yes
Felt Base	Yes	N / A	Yes	Yes	N / A
Steel Base	Yes	N / A	Yes	Yes	N / A
Hex Base	Yes	N / A	N / A	N / A	N / A
Inch Threads	1/4"-20 to 1/2"-13	1/4"-20 to 1/2"-13	N / A	N / A	4-40 to 3/8"-16
Metric Threads	M6-M12	M6-M10	N / A	N / A	N / A
Caster Stem	Yes	N / A	N / A	N / A	N / A
Top Adjustment	Yes	Yes	N / A	N / A	N / A
Steel Stud Lengths	1/2" to 3-1/2"	1/4" to 3-3/8"	N / A	N / A	1/4" to 1-5/8"
Stainless Steel Stud Lengths	13/16" to 1-11/16"	1/4" to 2-3/8"	N / A	N / A	13/16" to 1-11/16"
Load Rating	to 250 lbs.	to 1,000 lbs.	to 100 lbs.	to 250 lbs.	to 250 lbs.
Zinc or Nickel Plated Finish	Yes	Yes	Yes	Yes	Yes
Weld & Tee Nuts	Yes	N / A	Yes	N / A	N / A
Threaded Tube Inserts	Yes	Yes	Yes	N / A	N / A
Catalog Page	15-25	30-34	35-36	38-41	46-49



Threaded Leveling Glides


1-4 Light Duty, (Non-Swivel & Free-Turning) *threaded glides* are designed for light duty applications. Zinc plated stud and plastic base with nickel plated steel shell for improved appearance (black plastic base has a black oxide shell). Also available with a PVC base (-PVC) and a gray rubber base (-RG). The IL9-CAST is made to replace caster wheels on tables and chairs. More caster glides are shown at the end of this section. IL9-6Hx15-HX-SL has a Top-A-Just™ hex and slot.



(IL9-CAST)




IL13A-CAST-SVL



IL9-T

IL9-IL12 Stainless Glides (-SS)

5-Light Duty, (Swivel), Plastic Base *threaded glides* swivel 15° and are designed for light duty applications. Zinc-plated stud and plastic base with nickel plated steel shell for improved appearance. Same design as #6 below. IL13A offers greater swivel and does not have the lower hex.




(IL13A-xx)

6-Light Duty, (Non-Swivel), Plastic Base *threaded glides* are designed for light duty applications. Zinc-plated stud and plastic base with nickel plated steel shell for improved appearance. Same design as #5 above except non-swivel.



(IL14)



(IL14A-Metal)



(IL14A-WH)

6A-Light Duty, (Non-Swivel), Plastic Base, No Hex *threaded glides* are designed for light duty applications. Zinc-plated stud and plastic base with nickel plated steel shell for improved appearance. To order without nickel-plated shell, add (-WH) for white base. The IL14A glides do not have a lower hex.

Part Nbr.	Thread	Hex	A	B	C	Base
1-Light Duty, (Non-Swivel) Plastic, Rubber or PVC Base						
IL9A-41H	1/4-20	YES	1	1	3/4	White
IL9-41	1/4-20	NO	1-3/8	1	5/8	White
IL9-41H-SS	1/4-20	YES	1-3/8	1	5/8	White
IL9-4T	1/4-20	YES	1-3/8	N/A	13/16	White
IL9A-5HBx15	5/16-18	YES	1	1-1/2	3/4	Black
IL9A-5Hx15	5/16-18	YES	1	1-1/2	3/4	White
IL9-5Hx15-PVC	5/16-18	YES	1-3/8	1-1/2	3/4	Gray
IL9-5Hx15-RG	5/16-18	YES	1-3/8	1-1/2	3/4	Gray
IL9-52H-RG	5/16-18	YES	1-3/8	2	3/4	Gray
IL9-51	5/16-18	NO	1-3/8	1	5/8	White
IL9-51H	5/16-18	YES	1-3/8	1	3/4	White
IL9-5Hx15	5/16-18	YES	1-3/8	1-1/2	3/4	White
IL9-5Hx15-SS	5/16-18	YES	1-3/8	1-1/2	3/4	White
IL9-52H	5/16-18	YES	1-3/8	2	3/4	White
IL9-5T	5/16-18	YES	1-3/8	N/A	7/8	White
IL9A-6x15	3/8-16	NO	1	1-1/2	5/8	White
IL9-61H	3/8-16	YES	1-3/8	1-1/2	3/4	White
IL9-61H-SS	3/8-16	YES	1-3/8	1-1/2	3/4	White
IL9-61H-HX-SL	3/8-16	YES	1-3/8	1-1/2	3/4	White
IL9-6Hx15-PVC	3/8-16	YES	1-3/8	1-1/2	3/4	Gray
IL9-62H	3/8-16	YES	1-3/8	2	3/4	White
IL9-62HB	3/8-16	YES	1-3/8	2	3/4	Black
IL9-62HB-PVC	3/8-16	YES	1-3/8	2	3/4	Black
IL9-62Hx25-ZN	3/8-16	YES	1-3/8	2-1/2	3/4	White
IL9-63H	3/8-16	YES	1-3/8	3-1/2	3/4	White
IL9-6Hx3	3/8-16	YES	1-3/8	3	3/4	White
IL9-64H	3/8-16	YES	1-3/8	4	3/4	White
IL9-6T	3/8-16	YES	1-3/8	N/A	7/8	White
IL9-CAST	7/16	NO	3/8	7/8	5/8	White
IL9-CAST-RG	7/16	NO	3/8	7/8	5/8	Gray

1-Metric Light Duty, (Non-Swivel) Plastic Base

IL9-M6H	M6x1.0	YES	1-3/8	1	3/4	White
IL9-M8H	M8x1.25	YES	1-3/8	1	3/4	White
IL9-M10H	M10x1.50	YES	1-3/8	1	3/4	White
IL9-M10Hx38	M10x1.50	YES	1-3/8	1-1/2	3/4	White

2-Light Duty, (Free Turning), Plastic Base

IL10-5Hx15-SS	5/16-18	YES	1-11/16	1-1/2	3/4	White
IL10-61H	3/8-16	YES	1-3/8	1-1/2	3/4	White
IL10-62H	3/8-16	YES	1-3/8	2-1/2	3/4	White
IL10-72H	1/2-13	YES	1-3/8	2-1/2	3/4	White

3-Light Duty, (Non-Swivel) Plastic or Rubber Base

IL11-6Hx3/4	3/8-16	YES	1-3/4	3/4	7/8	White
IL11-61H	3/8-16	YES	1-3/4	1-1/2	7/8	White
IL11A-61H-GR	3/8-16	YES	2-1/4	1	7/8	Gray
IL11-62H	3/8-16	YES	1-3/4	2-1/2	7/8	White
IL11-63H	3/8-16	YES	1-3/4	3-1/2	7/8	White
IL11-65H	3/8-16	YES	1-3/4	5	7/8	White

4-Light Duty, (Free-Turning), Plastic or PVC Base

IL12-61H-SS	3/8-16	YES	1-11/16	1-1/2	3/4	White
IL12-61H-SS-TPR	3/8-16	YES	1-11/16	1-1/2	3/4	White
IL12-72H	1/2-13	YES	1-3/4	2-1/2	3/4	White
IL12-72H-PVC	1/2-13	YES	1-3/4	2-1/2	3/4	Grey
IL12B-72H	1/2-13	YES	2-1/4	2-1/2	3/4	White

Part Nbr.	Thread	Hex	A	B	C	Base
5-Light Duty, (Swivel), Plastic Base						
IL13-41	1/4-20	YES	1-1/8	1	5/8	White
IL13-4x1/2	1/4-20	YES	1-1/8	1/2	5/8	White
IL13-51	5/16-18	YES	1-1/8	1	5/8	White
IL13-5X15	5/16-18	YES	1-1/8	1-1/2	5/8	White
IL13-52	5/16-18	YES	1-1/8	2	5/8	White
IL13-61	3/8-16	YES	1-1/8	1	5/8	White
IL13-6x15	3/8-16	YES	1-1/8	1-1/2	5/8	White
IL13-62	3/8-16	YES	1-1/8	2	5/8	White
IL13A-6x15	3/8-16	NO	1-1/4	1-1/2	1/2	White
IL13A-62	3/8-16	NO	1-1/4	2	1/2	White
IL13A-CAST-SVL	7/16	NO	1-1/4	2	1/2	White

5-Metric Light Duty, (Swivel), Plastic Base

IL13-M6x25	M6x1.0	YES	1-1/8	1	5/8	White
IL13-M8x25	M8x1.25	YES	1-1/8	1	5/8	White
IL13-M8x38	M8x1.25	YES	1-1/8	1-1/2	5/8	White
IL13-M10x25	M10x1.50	YES	1-1/8	1	5/8	White
IL13-M10x38	M10x1.50	YES	1-1/8	1-1/2	5/8	White

6-Light Duty, (Non-Swivel), Plastic Base

IL14-41H	1/4-20	YES	1-1/8	1	5/8	White
IL14-51H	5/16-18	YES	1-1/8	1	5/8	White
IL14-5x15H	5/16-18	YES	1-1/8	1-1/2	5/8	White
IL14-5x625H	5/16-18	YES	1-1/8	5/8	5/8	White
IL14-61H	3/8-16	YES	1-1/8	1	5/8	White
IL14-6x15H	3/8-16	YES	1-1/8	1-1/2	5/8	White

6A-Light Duty, (Non-Swivel), Plastic Base, No Hex


IL14A-4x1/2	1/4-20	NO	1-1/8	1/2	1/2	White
IL14A-41	1/4-20	NO	1-1/8	1	1/2	White
IL14A-4x15	1/4-20	NO	1-1/8	1-1/2	1/2	White
IL14A-5x1/2	5/16-18	NO	1-1/8	1/2	1/2	White
IL14A-51	5/16-18	NO	1-1/8	1	1/2	White



Threaded Leveling Glides



7-Light Duty, (Non-Swivel), Black Vinyl Base *threaded glides* have a zinc plated steel stud and non-skid, non-marring base.

7A-Light Duty, (Non-Swivel), Black Vinyl Base - SS Stud these *threaded glides* feature a stainless steel stud with a non-skid and non-marring base.





Threaded Sliders

IEC's *threaded sliders* shown to the right allow for easy sliding and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black rubber cushion top.



8-Light Duty, (Non-Swivel), Steel Base *threaded glides* have a plastic cushion inside the nickel plated steel base which reduces noise. The stud is zinc plated. Steel based glides slide easily on carpet.



(IL16A)

Note: IL16A has a black plastic base (no steel shell).



* **Snap-on Nylon Glide Caps.** See page 10 for specifications. Available for IL16 thru IL18.

Part Nbr.	Thread	Hex	A	B	C	Base
7-Light Duty, (Non-Skid), Black Vinyl Base						
IL15-4x1/2	1/4-20	NO	1-1/8	1/2	3/8	Black
IL15-41	1/4-20	NO	1-1/8	1	3/8	Black
IL15-51	5/16-18	NO	1-1/8	1	3/8	Black
IL15-5x15	5/16-18	NO	1-1/8	1-1/2	3/8	Black
IL15-61	3/8-16	NO	1-1/8	1	3/8	Black
IL15-6x15	3/8-16	NO	1-1/8	1-1/2	3/8	Black
IL15-6x2	3/8-16	NO	1-1/8	2	3/8	Black

7A-Light Duty, (Non-Skid), Black Vinyl Base with Stainless Steel Stud						
IL15-4x1/2-SS	1/4-20	NO	1-1/8	1/2	3/8	Black
IL15-41-SS	1/4-20	NO	1-1/8	1	3/8	Black
IL15-51-SS	5/16-18	NO	1-1/8	1	3/8	Black
IL15-5x15-SS	5/16-18	NO	1-1/8	1-1/2	3/8	Black
IL15-52-SS	5/16-18	NO	1-1/8	2	3/8	Black
IL15-61-SS	3/8-16	NO	1-1/8	1	3/8	Black
IL15-6x15-SS	3/8-16	NO	1-1/8	1-1/2	3/8	Black
IL15-62-SS	3/8-16	NO	1-1/8	2	3/8	Black

7-Metric Light Duty, (Non-Skid), Black Vinyl Base						
IL15-M6	M6x1.00	NO	1-1/8	1	3/8	Black
IL15-M6x12	M6x1.00	NO	1-1/8	1/2	3/8	Black
IL15-M8	M8x1.25	NO	1-1/8	1	3/8	Black
IL15-M8x12	M8x1.25	NO	1-1/8	1/2	3/8	Black
IL15-M8x38	M8x1.25	NO	1-1/8	1-1/2	3/8	Black
IL15-M10	M10x1.50	NO	1-1/8	1	3/8	Black
IL15-M10x38	M10x1.50	NO	1-1/8	1-1/2	3/8	Black

Threaded Sliders

P/N	A DIA.	Base Ht.	Thread
IL15-41-SLDR	7/8	1/4	1/4-20x1
IL15-4x1/2-SLDR	7/8	1/4	1/4-20x1/2
IL15A-41-SLDR	1-1/8	1/4	1/4-20x1
IL15A-5x1/2-SLDR	1-1/8	1/4	5/16-18x1/2
IL15A-51-SLDR	1-1/8	1/4	5/16-18x1
IL15A-5x15-SLDR	1-1/8	1/4	5/16-18x1-1/2
IL15A-61-SLDR	1-1/8	1/4	3/8-16x1

Threaded Sliders - Metric

P/N	A DIA.	Base Ht.	Thread
IL15-M6-SLDR	7/8	1/4	M6X1
IL15-M6x12-SLDR	7/8	1/4	M6X1/2
IL15A-M8x12-SLDR	1-1/8	1/4	M8X1/2
IL15A-M8-SLDR	1-1/8	1/4	M8X1
IL15A-M10-SLDR	1-1/8	1/4	M10X1

Part Nbr.	Thread	Hex	A	B	C	Base
8-Light Duty, Steel Base (with Black Plastic Cushion)						
IL16-4x1/2	1/4-20	NO	7/8	1/2	7/16	Steel
IL16-41	1/4-20	NO	7/8	1	7/16	Steel
IL16-51	5/16-18	NO	7/8	1	7/16	Steel
IL17-41	1/4-20	NO	1-1/16	1	7/16	Steel
IL17-51	5/16-18	NO	1-1/16	1	7/16	Steel
IL18-41	1/4-20	NO	1-1/4	1	7/16	Steel
IL18-51	5/16-18	NO	1-1/4	1	7/16	Steel
IL18-61	3/8-16	NO	1-1/4	1	7/16	Steel
8-Light Duty, Metric Steel Base (with Black Plastic Cushion)						
IL16-M6x10	M6x1.0	NO	3/4	3/8	7/16	Steel
IL16-M6x25	M6x1.0	NO	3/4	1	7/16	Steel
IL17-M8x25	M8x1.25	NO	1-1/16	1	7/16	Steel
IL17-M10x25	M10x1.50	NO	1-1/16	1	7/16	Steel
IL18-M6x25	M6x1.0	NO	1-1/4	1	7/16	Steel
IL18-M8x25	M8x1.25	NO	1-1/4	1	7/16	Steel
IL18-M10x25	M10x1.50	NO	1-1/4	1	7/16	Steel


8A-Light Duty, Black Plastic Base						
IL16A-4x1/2	1/4-20	NO	1	1/2	3/8	Black
IL16A-4x3/4	1/4-20	NO	1	3/4	3/8	Black
IL16A-4x1	1/4-20	NO	1	1	3/8	Black
IL16A-51	5/16-18	NO	1	1	3/8	Black
IL16A-5x15	5/16-18	NO	1	1-1/2	3/8	Black




Threaded Leveling Glides

18-Light Duty, (Long Stem), Black Plastic Base These *long-stem glides* feature extended thread lengths and hex adjustment. IL31-6Bx15 also available with top slot (add -SL).


18B-Carpet Gripper Glides This *leveling glide* has spikes on the bottom of the black nylon base in order to resist sliding on carpet.

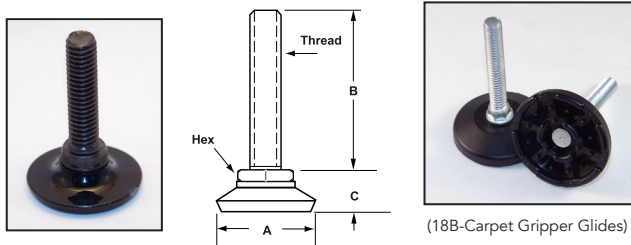


19-Light Duty, (Molded Hex), Black Plastic Base These *glides* feature a hex molded into the base which allows the base to be low profile.

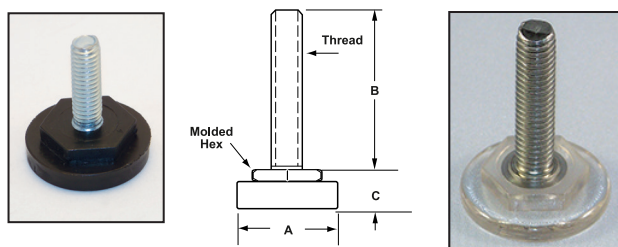

20-Light Duty, (Low Profile), Black Plastic Base These *low-profile glides* have some thread sizes with slots (-SL). Also available in white (-W) or brown (-BR).

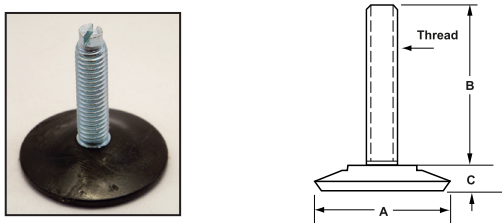

20A-Threaded Felt Pads IEC's *threaded felt pads* or IEC's wood screw felt pads (see Nail Glide section) provide floor protection and reduce noise. The threaded stud allows for leveling adjustment to reduce table and chair wobble. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts. Standard thread length is 1".

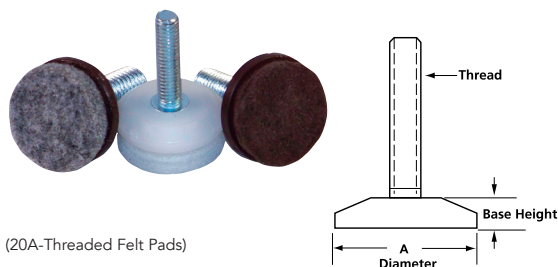

Part Nbr.	Thread	Hex	A	B	C	Base
18-Long Stem Glides						
IL31-6Bx15	3/8-16	YES	1-5/8	1-1/2	5/8	BLACK
IL31-6Bx25	3/8-16	YES	1-5/8	2-1/2	5/8	BLACK
IL31-6Bx35	3/8-16	YES	1-5/8	3-1/2	5/8	BLACK

18B - Carpet Gripper Glides						
IL31A-52B	5/16-18	YES	1-3/4	2	5/8	BLACK

19-Round Molded Hex Glides - Black						
IL32-41B	1/4-20	YES	1-1/4	1	3/8	BLACK
IL32-4Bx15	1/4-20	YES	1-1/4	1-1/2	3/8	BLACK
IL32-51B	5/16-18	YES	1-1/4	1	3/8	BLACK
IL32-5Bx15	5/16-18	YES	1-1/4	1-1/2	3/8	BLACK
IL32-52B	5/16-18	YES	1-1/4	2	3/8	BLACK
IL32-61B	3/8-16	YES	1-1/4	1	3/8	BLACK
IL32-6Bx15	3/8-16	YES	1-1/4	1-1/2	3/8	BLACK
IL32-62B	3/8-16	YES	1-1/4	2	3/8	BLACK
IL32-7Bx175	1/2-13	YES	1-3/8	1-3/4	7/16	BLACK
IL32A-41B	1/4-20	YES	1	1	3/8	BLACK
IL32A-4Bx15	1/4-20	YES	1	1-1/2	3/8	BLACK
IL32A-51B	5/16-18	YES	1	1	3/8	BLACK
IL32A-5Bx15	5/16-18	YES	1	1-1/2	3/8	BLACK
IL32A-61B	3/8-16	YES	1	1	3/8	BLACK
IL32A-6Bx15	3/8-16	YES	1	1-1/2	3/8	BLACK

19-Round Molded Hex Glides - Clear						
IL32-41C	1/4-20	YES	1-1/4	1	3/8	CLEAR
IL32-5Cx15	5/16-18	YES	1-1/4	1-1/2	3/8	CLEAR
IL32-6Cx15	3/8-16	YES	1-1/4	1-1/2	3/8	CLEAR

19-Round Molded Hex Glides - Clear Base, S.S. Stud						
IL32-41CS	1/4-20	YES	1-1/4	1	3/8	CLEAR
IL32-5CSx15	5/16-18	YES	1-1/4	1-1/2	3/8	CLEAR
IL32-6CSx15	3/8-16	YES	1-1/4	1-1/2	3/8	CLEAR

19-Metric Round Molded Hex Glides						
IL32-M8Bx38-SL	M8x1.25	YES	1-1/4	1-1/2	3/8	BLACK
IL32-M10Bx38-SL	M10x1.50	YES	1-1/4	1-1/2	3/8	BLACK

20-Low Profile Glides						
IL33-41B	1/4-20	NO	1-1/2	1	5/16	BLACK
IL33-4Bx15	1/4-20	NO	1-1/2	1-1/2	5/16	BLACK
IL33-5Bx3/4	5/16-18	NO	1-1/2	3/4	5/16	BLACK
IL33-5Bx15	5/16-18	NO	1-1/2	1-1/2	5/16	BLACK
IL33-6Bx3/4	3/8-16	NO	1-1/2	3/4	5/16	BLACK
IL33-6Bx15-SL	3/8-16	NO	1-1/2	1-1/2	3/8	BLACK
IL33A-6Bx15-SL	3/8-16	NO	1-3/4	1-1/2	3/8	BLACK
IL33B-61B	3/8-16	NO	2	1	3/8	BLACK

20A - Threaded Felt Pads						
Part Nbr.	Dia	Felt Thk.	Base Ht.	Thread		
IL33C-41B-FELT	1	5/16	1/2	1/4-20x1		
IL33C-51B-FELT	1	5/16	1/2	5/16-18x1		
IL33C-61B-FELT	1	5/16	1/2	3/8-16x1		

Thread length is 1" (25mm) for the metric threaded felt pads.

20A - Metric Threaded Felt Pads - Brown						
Part Nbr.	Dia	Felt Thk.	Base Ht.	Thread		
IL33C-M6B-FELT	1	5/16	1/2	M6x1.0		
IL33C-M8B-FELT	1	5/16	1/2	M8x1.25		
IL33C-M10B-FELT	1	5/16	1/2	M10x1.50		

Thread length is 1" (25mm) for the metric threaded felt pads.


20A - Metric Threaded Felt Pads - White						
Part Nbr.	Dia	Felt Thk.	Base Ht.	Thread		
IL33C-M6W-FELT	1	5/16	1/2	M6x1.0		
IL33C-M8W-FELT	1	5/16	1/2	M8x1.25		
IL33C-M10W-FELT	1	5/16	1/2	M10x1.50		

Thread length is 1" (25mm) for the metric threaded felt pads.




Threaded Fixed Base Leveling Glides

18C-Light Duty, Fixed Nylon Base *threaded glides* have a black, non-swivel base and black nylon top. The steel stud is zinc plated and has a top slot.




18C-Metric Light Duty, Fixed Nylon Base *threaded glides* have a black, non-swivel base and black nylon top. The metric steel stud is zinc plated and has a top slot.



18D-Light Duty, Fixed Rubber Base *threaded glides* have a black, non-swivel rubber base made of TPR (thermo-plastic rubber) which provides a non-skid, non-marring surface. The steel stud is zinc plated and has a top slot.

18D-Metric Light Duty, Fixed Rubber Base *threaded glides* have a black, non-swivel rubber base made of TPR (thermo-plastic rubber) which provides a non-skid, non-marring surface. The metric steel stud is zinc plated and has a top slot.



18E-Light Duty, Fixed PTFE Base *threaded sliders* allow for easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated stud with a top slot.

18E-Metric Light Duty, Fixed PTFE Base *threaded sliders* allow easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated metric stud with a top slot.

Part Nbr.	Thread	Hex	A	B	C	Base
18C-Fixed Nylon Base Glides						
IL31B-4X1/2-N	1/4-20	YES	1-3/8	1/2	7/8	BLACK
IL31B-41-N	1/4-20	YES	1-3/8	1	7/8	BLACK
IL31B-4X15-N	1/4-20	YES	1-3/8	1-1/2	7/8	BLACK
IL31B-51-N	5/16-18	YES	1-3/8	1	1	BLACK
IL31B-5X15-N	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31B-52-N	5/16-18	YES	1-3/8	2	1	BLACK
IL31B-61-N	3/8-16	YES	1-3/8	1	1	BLACK
IL31B-6X15-N	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31B-62-N	3/8-16	YES	1-3/8	2	1	BLACK

18C-Metric Fixed Nylon Base Glides

IL31B-M6X12-N	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-N	M6 X 1.0	YES	1-3/8	1	7/8	BLACK

IL31B-M8X12-N	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-N	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-N	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK

IL31B-M10X25-N	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-N	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-N	M10 X 1.50	YES	1-3/8	2	1	BLACK

18D-Fixed Rubber Base Glides

IL31B-4X1/2-R	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31B-41-R	1/4-20	YES	1-3/8	1	1	BLACK
IL31B-4X15-R	1/4-20	YES	1-3/8	1-1/2	1	BLACK

IL31B-51-R	5/16-18	YES	1-3/8	1	1	BLACK
IL31B-5X15-R	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31B-52-R	5/16-18	YES	1-3/8	2	1	BLACK

IL31B-61-R	3/8-16	YES	1-3/8	1	1	BLACK
IL31B-6X15-R	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31B-62-R	3/8-16	YES	1-3/8	2	1	BLACK

18D-Metric Fixed Rubber Base Glides

IL31B-M6X12-R	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-R	M6 X 1.0	YES	1-3/8	1	7/8	BLACK

IL31B-M8X12-R	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-R	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-R	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK

IL31B-M10X25-R	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-R	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-R	M10 X 1.50	YES	1-3/8	2	1	BLACK

18E-Fixed PTFE Slider Base Glides

IL31B-4X1/2-PTFE	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31B-41-PTFE	1/4-20	YES	1-3/8	1	1	BLACK
IL31B-4X15-PTFE	1/4-20	YES	1-3/8	1-1/2	1	BLACK

IL31B-51-PTFE	5/16-18	YES	1-3/8	1	1	BLACK
IL31B-5X15-PTFE	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31B-52-PTFE	5/16-18	YES	1-3/8	2	1	BLACK

IL31B-61-PTFE	3/8-16	YES	1-3/8	1	1	BLACK
IL31B-6X15-PTFE	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31B-62-PTFE	3/8-16	YES	1-3/8	2	1	BLACK

18E-Metric Fixed PTFE Slider Base Glides

IL31B-M6X12-PTFE	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-PTFE	M6 X 1.0	YES	1-3/8	1	7/8	BLACK

IL31B-M8X12-PTFE	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-PTFE	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-PTFE	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK

IL31B-M10X25-PTFE	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-PTFE	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-PTFE	M10 X 1.50	YES	1-3/8	2	1	BLACK



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS


THREADED GLIDES

Threaded Fixed Base Leveling Glides

18F-Light Duty, Fixed Steel Base *threaded glides* have a black nylon top above the steel base. The stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.



18F-Metric Light Duty, Fixed Steel Base *threaded glides* have a black nylon top above the steel base. The metric stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.



18G-Light Duty, Fixed Felt Base *threaded glides* (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.


18G-Metric Light Duty, Fixed Felt Base *threaded glides* (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded metric stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.

Part Nbr.	Thread	Hex	A	B	C	Base
18F-Fixed Steel Base Glides						
IL31B-4X1/2-S	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31B-41-S	1/4-20	YES	1-3/8	1	1	BLACK
IL31B-4X15-S	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31B-51-S	5/16-18	YES	1-3/8	1	1	BLACK
IL31B-5X15-S	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31B-52-S	5/16-18	YES	1-3/8	2	1	BLACK
IL31B-61-S	3/8-16	YES	1-3/8	1	1	BLACK
IL31B-6X15-S	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31B-62-S	3/8-16	YES	1-3/8	2	1	BLACK
18F-Metric Fixed Steel Base Glides						
IL31B-M6X12-S	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-S	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-S	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-S	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-S	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-S	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-S	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-S	M10 X 1.50	YES	1-3/8	2	1	BLACK
18G-Fixed Felt Base Glides						
IL31B-4X1/2-F	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31B-41-F	1/4-20	YES	1-3/8	1	1	BLACK
IL31B-4X15-F	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31B-51-F	5/16-18	YES	1-3/8	1	1	BLACK
IL31B-5X15-F	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31B-52-F	5/16-18	YES	1-3/8	2	1	BLACK
IL31B-61-F	3/8-16	YES	1-3/8	1	1	BLACK
IL31B-6X15-F	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31B-62-F	3/8-16	YES	1-3/8	2	1	BLACK
18G-Metric Fixed Felt Base Glides						
IL31B-M6X12-F	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-F	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-F	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-F	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-F	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-F	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-F	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-F	M10 X 1.50	YES	1-3/8	2	1	BLACK




Threaded Swivel Base Leveling Glides

18C-Light Duty, Swivel Nylon Base *threaded glides* have a black, swivel base and black nylon top. The steel stud is zinc plated and has a top slot.




18C-Metric Light Duty, Swivel Nylon Base *threaded glides* have a black, swivel base and black nylon top. The metric steel stud is zinc plated and has a top slot.

18D-Light Duty, Swivel Rubber Base *threaded glides* have a black, swivel rubber base made of TPR (thermo-plastic rubber) for non-skid, non-marring support. The steel stud is zinc plated and has a top slot.



18D-Metric Light Duty, Swivel Rubber Base *threaded glides* have a black, swivel rubber base made of TPR (thermo-plastic rubber) for non-skid, non-marring support. The metric steel stud is zinc plated and has a top slot.

18E-Light Duty, Swivel PTFE Base *threaded sliders* allow for easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated stud with a top slot.



18E-Metric Light Duty, Swivel PTFE Base *threaded sliders* allow for easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated metric stud with a top slot.

Part Nbr.	Thread	Hex	A	B	C	Base
-----------	--------	-----	---	---	---	------

18H-Swivel Nylon Base Glides

IL31C-4X1/2-N	1/4-20	YES	1-3/8	1/2	7/8	BLACK
IL31C-41-N	1/4-20	YES	1-3/8	1	7/8	BLACK
IL31C-4X15-N	1/4-20	YES	1-3/8	1-1/2	7/8	BLACK
IL31C-51-N	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-N	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-N	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-N	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-N	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-N	3/8-16	YES	1-3/8	2	1	BLACK

18H-Metric Swivel Nylon Base Glides

IL31C-M6X12-N	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-N	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-N	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-N	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-N	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-N	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-N	M10x1.5	YES	1-3/8	1-1/2	1	BLACK

18J-Swivel Rubber Base Glides

IL31C-4X1/2-R	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31C-41-R	1/4-20	YES	1-3/8	1	1	BLACK
IL31C-4X15-R	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31C-51-R	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-R	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-R	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-R	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-R	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-R	3/8-16	YES	1-3/8	2	1	BLACK

18J-Metric Swivel Rubber Base Glides

IL31C-M6X12-R	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-R	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-R	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-R	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-R	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-R	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-R	M10x1.5	YES	1-3/8	1-1/2	1	BLACK

18K-Swivel PTFE Slider Base Glides

IL31C-4X1/2-PTFE	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31C-41-PTFE	1/4-20	YES	1-3/8	1	1	BLACK
IL31C-4X15-PTFE	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31C-51-PTFE	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-PTFE	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-PTFE	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-PTFE	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-PTFE	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-PTFE	3/8-16	YES	1-3/8	2	1	BLACK

18K-Metric Swivel PTFE Slider Base Glides

IL31C-M6X12-PTFE	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-PTFE	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-PTFE	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-PTFE	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-PTFE	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-PTFE	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-PTFE	M10x1.5	YES	1-3/8	1-1/2	1	BLACK


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS**THREADED GLIDES****Threaded Swivel Base Leveling Glides**

18L-Light Duty, Swivel Steel Base *threaded glides* have a black nylon top above the steel base. The stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.



18L-Metric Light Duty, Swivel Steel Base *threaded glides* have a black nylon top above the steel base. The metric stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.



18M-Light Duty, Swivel, Felt Base *threaded glides* (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded metric stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.

18M-Metric Light Duty, Swivel, Felt Base *threaded glides* (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded metric stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.

Part Nbr.	Thread	Hex	A	B	C	Base
-----------	--------	-----	---	---	---	------

18L-Swivel Steel Slider Base Glides

IL31C-4X1/2-S	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31C-41-S	1/4-20	YES	1-3/8	1	1	BLACK
IL31C-4X15-S	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31C-51-S	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-S	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-S	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-S	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-S	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-S	3/8-16	YES	1-3/8	2	1	BLACK

18L-Metric Swivel Steel Slider Base Glides

IL31C-M6X1/2-S	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X1-S	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X1/2-S	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X1-S	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X3/8-S	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X1-S	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X15-S	M10x1.5	YES	1-3/8	1-1/2	1	BLACK

18M-Swivel Felt Slider Base Glides

IL31C-4X1/2-F	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31C-41-F	1/4-20	YES	1-3/8	1	1	BLACK
IL31C-4X15-F	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31C-51-F	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-F	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-F	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-F	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-F	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-F	3/8-16	YES	1-3/8	2	1	BLACK



18M-Metric Swivel Felt Slider Base Glides

IL31C-M6X1/2-F	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X1-F	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X1/2-F	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X1-F	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X3/8-F	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X1-F	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X15-F	M10x1.5	YES	1-3/8	1-1/2	1	BLACK




Threaded Leveling Glides



21-Light Duty, (Oval) White Plastic Base These *oval glides* are available in small diameter sizes. Also available in brown color plastic (add -BR to part number).



22-Light Duty, Clear, Plastic Base These *clear plastic glides* are available with three thread lengths.



23-Light Duty, Brown, Plastic Base This *"bottle cap" glide* has an extended thread length and slot. Ideal for cabinet installations. IL36A does not have a top slot.



(IL36A)

23A-Snap On Nylon Glide Caps These *nylon caps* snap over the base of several types of metal based glides. Examples: IL16 thru IL18, IL22 & IL23.



Part Nbr.	Thread	Hex	A	B	C	Base
21-Oval Base Glides						
IL34-4Wx625	1/4-20	NO	5/8	5/8	1/4	WHITE
IL34-41W	1/4-20	NO	5/8	1	1/4	WHITE
IL34A-41W	1/4-20	NO	3/4	1	1/4	WHITE
IL34B-41W	1/4-20	NO	7/8	1	1/4	WHITE
IL34C-41W	1/4-20	NO	1	1	1/4	WHITE
IL34D-4Wx625	1/4-20	NO	1-1/8	5/8	1/4	WHITE
IL34D-41W	1/4-20	NO	1-1/8	1	1/4	WHITE
IL34D-4x15W	1/4-20	NO	1-1/8	1-1/2	1/4	WHITE

Part Nbr.	Thread	Hex	A	B	C	Base
22-Clear Glides						
IL35-4x1/2	1/4-20	NO	1	1/2	13/32	CLEAR
IL35-4x3/4	1/4-20	NO	1	3/4	13/32	CLEAR
IL35-41	1/4-20	NO	1-1/8	1	7/16	CLEAR

Note: More sizes of clear glides in steel and stainless steel. (See IL32).

Part Nbr.	Thread	Hex	A	B	C	Base
23-Bottle Cap Glide						
IL36-5x2-SL	5/16-18	NO	1-1/8	2	1/4	BROWN
IL36-52-SL	5/16-18	NO	1-1/8	2-1/4	1/4	BROWN
IL36-5x275-SL	5/16-18	NO	1-1/8	2-3/4	1/4	BROWN
IL36-54-SL	5/16-18	NO	1-1/8	4	1/4	BROWN
IL36A-4Bx75	1/4-20	NO	7/8	3/4	1/4	BLACK
IL36A-5Bx75	5/16-18	NO	7/8	3/4	1/4	BLACK
IL36A-6Bx75	3/8-16	NO	7/8	3/4	1/4	BLACK
IL36A-M6x25	M6 x 1.0	NO	7/8	1	1/4	BLACK
IL36A-M8x25	M8 x 1.25	NO	7/8	1	1/4	BLACK

Snap On Nylon Glide Caps

P/N	FITS DIAMETER	FITS BASE
IL-CAP-NYL-1	7/8	STD BASE
IL-CAP-NYL-2	15/16	STD BASE
IL-CAP-NYL-3	1	STD BASE
IL-CAP-NYL-4	1-1/16	STD BASE
IL-CAP-NYL-5	1-1/4	STD BASE
IL-CAP-NYL-6	1-1/4	THICK BASE
IL-CAP-NYL-7	1-1/4	CONICAL BASE



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

THREADED GLIDES


Threaded Leveling Glides

24-Medium Duty, Zinc plated, Metal Swivel Base These *steel glides* have a zinc plated shell and stud. The stud tilts approximately 20°. The IL37A features a top end hex.




(IL37A-xx)

25-Light Duty, Plastic Swivel Base These *swivel glides* tilt 25° from the centerline. Available in black or white plastic.





26-Light Duty, Black, Plastic Base Hex Glides These *hex glides* are offered with a 1/4-20, 5/16-18 and 3/8-16 thread size. The 5/16-18 and metric sizes have a top end slot.






(IL39-4Bx15)

(IL39-5Bx15-SL)




27-Medium Duty, Zinc Plated, Steel Hex Glides These *hex glides* are low profile and can handle heavy loads. Some sizes are available with a slot (-SL). Also available with top hex and slot (-HX-SL). Available with a gray polyethylene cap that fits over the hex. Add (-CAP) to part number. Limited offering in metric sizes.



Part Nbr.	Thread	Hex	A	B	C	Base
24-Metal Base, Swivel Glides						
IL37-52	5/16-18	YES	1-3/4	2	3/8	ZINC
IL37-6x15	3/8-16	YES	1-3/4	1-1/2	3/8	ZINC
IL37-62	3/8-16	YES	1-3/4	2	3/8	ZINC
IL37-6x25	3/8-16	YES	1-3/4	2-1/2	3/8	ZINC
IL37-63	3/8-16	YES	1-3/4	3	3/8	ZINC
IL37-64	3/8-16	YES	1-3/4	4	3/8	ZINC
IL37A-6x35-HX	3/8-16	YES	1-3/16	3-1/2	3/8	ZINC
25-Plastic Swivel Glides						
IL38-41B	1/4-20	NO	1-1/8	1	5/8	BLACK
IL38-41W	1/4-20	NO	1-1/8	1	5/8	WHITE
26-Plastic Hex Glides						
IL39-4Bx15	1/4-20	YES	1	1-1/2	5/16	BLACK
IL39-5Bx15-SL	5/16-18	YES	1	1-3/4	1/4	BLACK
IL39-61	3/8-16	YES	3/4	1	1/4	BLACK
IL39-6x15	3/8-16	YES	3/4	1-1/2	1/4	BLACK
26-Metric Plastic Hex Glides						
IL39-M8Bx38-SL	M8x1.25	YES	3/4	1-1/2	1/4	BLACK
IL39-M10Bx38-SL	M10x1.25	YES	3/4	1-1/2	1/4	BLACK
27-Steel Hex Glides						
IL40-41	1/4-20	YES	9/16	1	3/32	ZINC
IL40-4x125	1/4-20	YES	9/16	1-1/4	3/32	ZINC
IL40-5x1/2	5/16-18	YES	3/4	1/2	7/64	ZINC
IL40-51	5/16-18	YES	3/4	1	7/64	ZINC
IL40-5x125	5/16-18	YES	3/4	1-1/4	7/64	ZINC
IL40-5x15	5/16-18	YES	3/4	1-1/2	7/64	ZINC
IL40-5x15-SL	5/16-18	YES	3/4	1-1/2	7/64	ZINC
IL40-6x1/2	3/8-16	YES	7/8	1/2	9/64	ZINC
IL40-6x125	3/8-16	YES	7/8	1-1/4	9/64	ZINC
IL40-6x15	3/8-16	YES	7/8	1-1/2	9/64	ZINC
IL40-6x15-SL	3/8-16	YES	7/8	1-1/2	9/64	ZINC
IL40-6x2-SL	3/8-16	YES	7/8	2	9/64	ZINC
IL40-6x25-SL	3/8-16	YES	7/8	2-1/2	9/64	ZINC
IL40-7x25	1/2-13	YES	1-1/16	2-1/2	11/64	ZINC
27-Steel Hex Glides - Metric						
IL40-M6x30	M6x1	YES	9/16	1	3/32	ZINC
IL40-M8x25	M8x1.25	YES	3/4	1	7/64	ZINC
IL40-M8x40-SL	M8x1.25	YES	3/4	1-1/2	7/64	ZINC
IL40-M10x35	M10x1.50	YES	7/8	1-1/4	9/64	ZINC
IL40-M10x40-SL	M10x1.50	YES	7/8	1-1/2	9/64	ZINC
IL40-M10x60	M10x1.50	YES	7/8	2-3/8	9/64	ZINC
IL40-M10x65-SL	M10x1.50	YES	7/8	2-1/2	9/64	ZINC
IL40-M12x65	M12x1.75	YES	1-1/16	2-1/2	11/64	ZINC
27A-Steel Hex Glides with Top Hex and Slot						
IL40-4x3/4-HX-SL	1/4-20	YES	9/16	3/4	3/32	ZINC
IL40-41-HX-SL	1/4-20	YES	9/16	1	3/32	ZINC
IL40-4x125-HX-SL	1/4-20	YES	9/16	1-1/4	3/32	ZINC
IL40-4x15-HX-SL	1/4-20	YES	9/16	1-1/2	3/32	ZINC
IL40-4x2-HX-SL	1/4-20	YES	9/16	2	3/32	ZINC
IL40-5x3/4-HX-SL	5/16-18	YES	13/16	3/4	9/64	ZINC
IL40-51-HX-SL	5/16-18	YES	13/16	1	9/64	ZINC
IL40-5x125-HX-SL	5/16-18	YES	13/16	1-1/4	9/64	ZINC
IL40-5x15-HX-SL	5/16-18	YES	13/16	1-1/2	9/64	ZINC
IL40-5x2-HX-SL	5/16-18	YES	13/16	2	9/64	ZINC
IL40-5x25-HX-SL	5/16-18	YES	13/16	2-1/2	9/64	ZINC
IL40-6x3/4-HX-SL	3/8-16	YES	13/16	3/4	9/64	ZINC
IL40-61-HX-SL	3/8-16	YES	13/16	1	9/64	ZINC
IL40-6x125-HX-SL	3/8-16	YES	13/16	1-1/4	9/64	ZINC
IL40-6x15-HX-SL	3/8-16	YES	13/16	1-1/2	9/64	ZINC
IL40-6x2-HX-SL	3/8-16	YES	13/16	2	9/64	ZINC
IL40-6x25-HX-SL	3/8-16	YES	13/16	2-1/2	9/64	ZINC
IL40-6x3-HX-SL	3/8-16	YES	13/16	3	9/64	ZINC
IL40-6x35-HX-SL	3/8-16	YES	13/16	3-1/2	9/64	ZINC
IL40-7x188-HX*	1/2-13	YES	7/8	1-7/8	9/64	ZINC
IL40-7x312-HX*	1/2-13	YES	7/8	3-1/8	9/64	ZINC

* Top hex only, no slot.




PE Cap for Hex Glides




Threaded Leveling Glides

28-Light Duty, Zinc Plated, Stamped Hex These *stamped hex glides* offer a large base diameter.




(IL41A-Xx)



29-Medium Duty Vibration Glides These *vibration dampening glides* have a black or gray neoprene base. The black base has a black finish on the shell and stud while the gray base has a clear zinc finish on the shell and stud.



30-Light Duty, Nickel Plated, Slotted Swivel Glides These *swivel glides* have a white plastic base with a nickel plated shell. The stud swivels 20° from the centerline. The top slot is standard but may also be ordered with a top hex and slot (-HX-SL).



31-Slotted Swivel Glide and Bracket Sets These *slotted glide and bracket sets* are designed for wood or metal applications. The glides swivel and have a top end slot (IL43 series). The corner (IL30-6-CB) and side brackets (IL30-6-SB) can be welded or installed with wood screws or bolts.

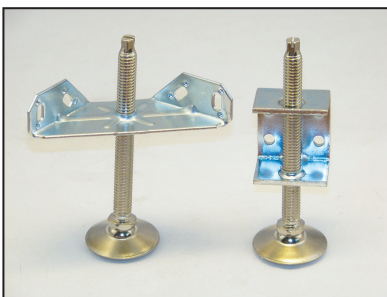

Part Nbr.	Thread	Hex	A	B	C	Base
28-Stamped Hex Glides						
IL41-4x15	1/4-20	YES	1-3/8	1-1/2	5/16	ZINC
IL41-5x15	5/16-18	YES	1-3/8	1-1/2	5/16	ZINC
IL41-5x25	5/16-18	YES	1-3/8	2-1/2	5/16	ZINC
IL41-6x125-HX	3/8-16	YES	1-3/8	1-1/4	5/16	ZINC
IL41-6x15	3/8-16	YES	1-3/8	1-1/2	5/16	ZINC
IL41-6x175-HX	3/8-16	YES	1-3/8	1-3/4	5/16	ZINC
IL41-7x15	1/2-13	YES	1-3/8	1-1/2	5/16	ZINC
IL41-73	1/2-13	YES	1-3/8	3	5/16	ZINC
IL41-7x35-HX	1/2-13	YES	1-3/8	3-1/2	5/16	ZINC
IL41A-63B-HX-SL	3/8-16	YES	1-3/8	3	5/16	BLACK

NOTE: PN's with a "-HX" have a top hex on stud. IL41-7-35-HX has 3/8" top hex, 3/8" tall

Part Nbr.	Thread	Hex	A	B	C	Base
29-Vibration Glides						
IL42-5Gx15	5/16-18	YES	1	1-1/2	13/16	GRAY
IL42-5Bx15	5/16-18	YES	1	1-1/2	13/16	BLACK
IL42-M8Gx40	M8	YES	1	1-1/2	13/16	GRAY
IL42-63G	3/8-16	YES	1-1/2	3	1	GRAY
IL42-63B	3/8-16	YES	1-1/2	3	1	BLACK
IL42-72G	1/2-13	YES	1-1/2	2	1	GRAY
IL42-72B	1/2-13	YES	1-1/2	2	1	BLACK

Part Nbr.	Thread	Hex	A	B	C	Base
30-Slotted Swivel Glides						
IL43-6x15-SL	3/8-16	YES	1-1/2	1-1/2	5/8	NICKEL
IL43-6x15-HX-SL	3/8-16	YES	1-1/2	1-1/2	5/8	NICKEL
IL43-6x25-SL	3/8-16	YES	1-1/2	2-1/2	5/8	NICKEL
IL43-6x25-HX-SL	3/8-16	YES	1-1/2	2-1/2	5/8	NICKEL
IL43-63-SL	3/8-16	YES	1-1/2	3	5/8	NICKEL
IL43-63-HX-SL	3/8-16	YES	1-1/2	3	5/8	NICKEL
IL43-6x35-SL	3/8-16	YES	1-1/2	3-1/2	5/8	NICKEL
IL43-6x35-HX-SL	3/8-16	YES	1-1/2	3-1/2	5/8	NICKEL
IL43-64-SL	3/8-16	YES	1-1/2	4	5/8	NICKEL

30-Metric Slotted Swivel Glides


IL43-M8x38-HX-SL	M8x1.25	YES	1-1/2	1-1/2	5/8	NICKEL
IL43-M10x38-HX-SL	M10x1.50	YES	1-1/2	1-1/2	5/8	NICKEL

NOTE: Part Numbers with a "-HX" have a top hex on stud.

Part Nbr.	Thread	Hex	A	B	C	Base
31-Slotted Swivel Glide and Bracket Sets						
IL44-61-CB	3/8-16	YES	1-1/2	1-1/2	5/8	NICKEL
IL44-63-CB	3/8-16	YES	1-1/2	3	5/8	NICKEL
IL44-64-CB	3/8-16	YES	1-1/2	4	5/8	NICKEL
IL44-61-SB	3/8-16	YES	1-1/2	1-1/2	5/8	NICKEL
IL44-63-SB	3/8-16	YES	1-1/2	3	5/8	NICKEL
IL44-64-SB	3/8-16	YES	1-1/2	4	5/8	NICKEL

Part Nbr.	Thread	Hex	A	B	C	Base
32-Thick Base Glides						
IL45-51B	5/16-18	NO	7/8	1	1/4	BLACK
IL45-5Bx15	5/16-18	NO	1-1/8	1-1/2	3/8	BLACK

32-Thick Base Glide These glides have a rugged-duty, black H.D.P.E. base.





INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

THREADED GLIDES

Threaded Leveling Glides



33-Self-Adjusting Levelers These *self-adjusting levelers* reduce table wobble. They feature an internal spring or a hydraulic spring (-HY).




34-Table Wedge This *black rubber table leg wedge* is designed to stop table wobble or to be used as a shim.



35-Big Foot Leveler These *large base levelers* are available in a black or white nylon base. To order white, replace "B" with "W".



37-Zinc-plated Steel Vibration Levelers These zinc-plated steel levelers have a waffle-type black neoprene pad that reduces vibration and provides grip. The stud swivels approximately 10° from the centerline.



33-IL46 Self-Adjusting Levelers

P/N	Thread x Length	Base Dia.	Height
IL46-4Bx38	1/4-20x3/8	1-1/4	1
IL46-5HBx75*	5/16-18x3/4	1-1/4	1
IL46-5HBx1*	5/16-18x1	1-1/4	1
IL46-4Bx38-HY	1/4-20x3/8	1-1/2	1-1/8
IL46-5Bx38-HY	5/16-18x3/8	1-1/2	1-1/8
IL46-6Bx38-HY	3/8-16x3/8	1-1/2	1-1/8
IL46-M6Bx10-HY	M6x10mm	1-1/2	1-1/8
IL46-M8Bx10-HY	M8x10mm	1-1/2	1-1/8
IL46-M10Bx10-HY	M10x10mm	1-1/2	1-1/8

* Hex above base

34-Table Leg Wedge

P/N	Height	Width	Length
IL46A-WEDGE-1	3/16	1-1/8	1-7/8

Part Nbr.	Thread	Hex	A	B	C	Base
35-Big Foot Leveler						
IL47-5Bx15	5/16-18	YES	2-1/2	1-1/2	3/4	Black
IL47-5Bx25	5/16-18	YES	2-1/2	2-1/2	3/4	Black
IL47-6Bx15	3/8-16	YES	2-1/2	1-1/2	3/4	Black
IL47-6Bx25	3/8-16	YES	2-1/2	2-1/2	3/4	Black
IL47-6Bx35	3/8-16	YES	2-1/2	3-1/2	3/4	Black
IL47-7Bx25	1/2-13	YES	2-1/2	2-1/2	3/4	Black
IL47-7Bx35	1/2-13	YES	2-1/2	3-1/2	3/4	Black

Part Nbr.	Thread	Hex	Load	A	B	C
37-Zinc Plated Steel Vibration Levelers						
IL49-4x125-75	1/4-20	YES	75	1-1/2	1-1/4	1
IL49-4x125-150	1/4-20	YES	150	1-1/2	1-1/4	1
IL49-6x162-75	3/8-16	YES	75	2-1/8	1-5/8	1
IL49-6x162-150	3/8-16	YES	150	2-1/8	1-5/8	1
IL49-6x162-300	3/8-16	YES	300	2-1/8	1-5/8	1
IL49-7x175-75	1/2-13	YES	75	2-1/8	1-11/16	1
IL49-7x175-150	1/2-13	YES	150	2-1/8	1-11/16	1
IL49-7x175-300	1/2-13	YES	300	2-1/8	1-11/16	1
IL49-7x175-450	1/2-13	YES	450	2-1/8	1-11/16	1



Furniture & Appliance Legs – Adjustable Metal

IEC's adjustable metal legs are available in matte nickel (-MN), stainless steel (-SS), chrome (-CHR) and black epoxy finish (-BLK).


IL635, IL638 and IL639 have 1" of adjustment.
IL636 and IL637 have 1-3/4" adjustment.

IL635 thru IL640 have a 1000 lb load rating and are NSF certified. IL641 has a 500 lb load rating.


METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL635X4-6X38-MN	4	3/8-16X3/8	.75

Adjustment = 1"

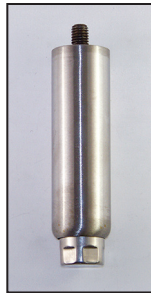
METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL636X4-7X75-SS	4	1/2-13X3/4	.75
IL636X6-7X75-SS	6	1/2-13X3/4	1.0



Adjustment = 1-3/4"

Stainless Steel Tubing Feet with Adjustable Legs

These round and square stainless steel tubing feet are made to fit 16-18 ga tubing. The foot has hex flats and can be raised 1-1/8" inches from the minimum height shown ("C" dimension). The housing that fits inside the tube is zinc die cast (Zamak). The foot is clad with 304 SS. NSF certified.

IL636-PLT (shown below)

The plate for the IL636 foot is a 3-1/2" (89 mm) SQUARE STEEL PLATE, 1/8" THICK, GALVANIZED, WITH 1/2-13 THREADED CENTER HOLE, 4 CORNER HOLES, 5/16" DIA, SPACED 67 MM (2-5/8") apart. This plate is included when ordering the IL637 legs.

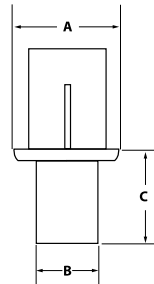
ROUND & SQUARE SS TUBING FEET

P/N	A	B	C
IL27-636-RD-SS	1-1/2	1-1/8	1-1/2
IL27B2-636-RD-SS	1-5/8	1-1/8	1-1/2
IL27A-636-RD-SS	2	1-9/16	1-1/2
IL27-636-SQ-SS	1-1/2	1-1/8	1-1/2
IL27B2-636-SQ-SS	1-5/8	1-1/8	1-1/2
IL27A-636-SQ-SS	2	1-9/16	1-1/2


METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL637X4-SS	4	3-1/2 SQ	.75
IL637X6-SS	6	3-1/2 SQ	1.0

Adjustment = 1-3/4". Stainless steel leg is 1-5/8" diameter. Adjustable foot is 1-1/4" diameter with 6 wrench flats. Also available with 2" diameter shell.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

ADJUSTABLE LEGS

Furniture & Appliance Legs – Adjustable Metal

IEC's adjustable metal legs are available in matte nickel (-MN), stainless steel (-SS), chrome (-CHR) and black epoxy finish (-BLK).

IL635, IL638 and IL639 have 1" of adjustment.
IL636 and IL637 have 1-3/4" adjustment.

IL635 thru IL640 have a 1000 lb load rating and are NSF certified. IL641 has a 500 lb load rating.

IL640 is available in black plastic or nickel finish. It has 1" of adjustment.

IL641 has a 3/8-16 thread. It comes with a nylon base threaded glide which provides 1-1/4" of height adjustment. You can also choose a different threaded leveler or caster for this leg. Load rating, 500 lbs. or less.



METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL638X4-SS	4	3-1/2 SQ	.75
IL638X6-SS	6	3-1/2 SQ	1.0

Adjustment = 1"



METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL638X6-BLK	6	3-1/2 SQ	1.0

Adjustment = 1"



METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL639X4-6x75-SS	4	3/8-16x3/4	1.0
IL639X6-7x75-SS	6	1/2-13x3/4	1.5
IL639X6-8x75-SS	6	5/8-11x3/4	1.5
IL639X6-9x75-SS	6	3/4-10x3/4	1.5

Adjustment = 1"



METAL — ADJUSTABLE LEGS

P/N	LEG HEIGHT	THREAD/ PLATE SZ.	WEIGHT (LB)
IL640X4-6x1/2-BLK	4	3/8-16x1/2	.5
IL640X4-6x1/2-NKL	4	3/8-16x1/2	.5

Adjustment = 1"

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**Phone: 562.597.4533 eMail: sales@iec-corp.comWeb: www.levelingmounts.com | www.iec-corp.com**LIGHT-DUTY LEVELERS****ADJUSTABLE LEGS****Furniture & Appliance
Legs – Plastic**

These *plastic legs* are made of brown polyethylene (100 lb load rating).

**PLASTIC — FURNITURE AND APPLIANCE LEGS**

P/N	LEG HT.	THREAD/ PLATE SZ.	WEIGHT (LB)
IL652X3-51-BRN	3	5/16-18 X 1	.20
IL652X5-51-BRN	5	5/16-18X1	.25

Top diameter of leg is 2" .



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

PLASTIC BELL GLIDES

Plastic Bell Glides

IEC's *bell glides* are made to replace caster wheels on rolling chairs, tables, displays, etc. The steel stem has a grip ring, and the bell glides have a black nylon base. The IL9-CAST has a white nylon base with a nickel plated shell. The IL9-CAST-PVC has a non-skid gray PVC/rubber base.



IL9-CAST



IL659B

PLASTIC BELL GLIDES (CASTER REPLACEMENT)

P/N	BASE HT.	BASE DIA.	NECK DIA.	STEM DIA.	STEM HT.
IL-659X225	2-1/4	2-1/8	1-1/4	7/16	7/8
IL-659X125	1-1/4	2	1-1/2	7/16	7/8
IL-659AX125	1-1/4	2	3/4	7/16	7/8
IL9-CAST	1/2	1-3/8	N/A	7/16	7/8
IL9-CAST-PVC	1/2	1-3/8	N/A	7/16	7/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

KNOB STYLE GLIDES

Knob Style (Socket Type) Glides and Levelers

These *low-profile polypropylene levelers/knobs* are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick.

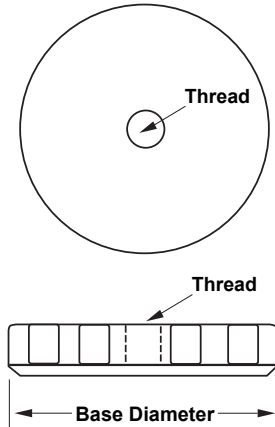

PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75


Threaded Nylon Knob Hubs/Sleeves

These *glass-filled black nylon threaded knob hubs* can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used as a "thru-hole" knob or a locking nut.



BLACK NYLON THREADED KNOB HUBS

P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4-THRU	1/4-20	1"	3/8
IL80-HUB-5-THRU	5/16-18	1"	3/8
IL80-HUB-6-THRU	3/8-16	1"	3/8
IL80A-HUB-4-THRU	1/4-20	1"	3/4
IL80A-HUB-5-THRU	5/16-18	1"	3/4
IL80A-HUB-6-THRU	3/8-16	1"	3/4

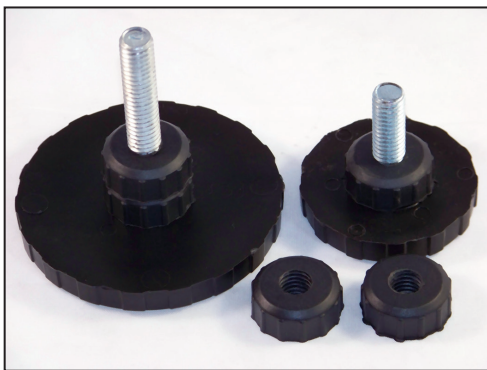

* Patent Pending



Many colors available as custom option.


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS**KNOB STYLE GLIDES****KNOB STYLE GLIDES**

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.



Many colors available as custom option.

Top Hex (-HX)
and Slot (-SL)

36 - Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
36-Steel and Stainless Steel Knob Style (PVC Base) Glides						
IL82-4Bx1/4-PVC	IL82-4BSx1/4-PVC	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2-PVC	IL82-4BSx1/2-PVC	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1-PVC	IL82-4BSx1-PVC	100	1/4-20	1-1/2	1	3/8
IL82-4Bx125-PVC	IL82-4BSx125-PVC	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx175-PVC	IL82-4BSx175-PVC	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2-PVC	IL82-4BSx2-PVC	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275-PVC	IL82-4BSx275-PVC	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/2-PVC	IL82-5BSx1/2-PVC	100	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1-PVC	IL82-5BSx1-PVC	100	5/16-18	1-1/2	1	3/8
IL82-5Bx125-PVC	IL82-5BSx125-PVC	100	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175-PVC	IL82-5BSx175-PVC	100	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL-PVC	IL82-5BSx225-HX-SL-PVC	100	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/2-PVC	IL82-6BSx1/2-PVC	100	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1-PVC	IL82-6BSx1-PVC	100	3/8-16	1-1/2	1	3/8
IL82-6Bx125-PVC	IL82-6BSx125-PVC	100	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx175-PVC	IL82-6BSx175-PVC	100	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238-PVC	IL82-6BSx238-PVC	100	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL-PVC	IL82-6BSx275-HX-SL-PVC	100	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL-PVC	IL82-6BSx338-HX-SL-PVC	100	3/8-16	1-1/2	3-3/8	3/8
IL84-4Bx1/4-PVC	IL84-4BSx1/4-PVC	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2-PVC	IL84-4BSx1/2-PVC	100	1/4-20	2	1/2	3/8
IL84-4Bx1-PVC	IL84-4BSx1-PVC	100	1/4-20	2	1	3/8
IL84-4Bx125-PVC	IL84-4BSx125-PVC	100	1/4-20	2	1-1/4	3/8
IL84-4Bx175-PVC	IL84-4BSx175-PVC	100	1/4-20	2	1-3/4	3/8
IL84-4Bx2-PVC	IL84-4BSx2-PVC	100	1/4-20	2	2	3/8
IL84-4Bx275-PVC	IL84-4BSx275-PVC	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/2-PVC	IL84-5BSx1/2-PVC	100	5/16-18	2	1/2	3/8
IL84-5Bx1-PVC	IL84-5BSx1-PVC	100	5/16-18	2	1	3/8
IL84-5Bx125-PVC	IL84-5BSx125-PVC	100	5/16-18	2	1-1/4	3/8
IL84-5Bx175-PVC	IL84-5BSx175-PVC	100	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL-PVC	IL84-5BSx225-HX-SL-PVC	100	5/16-18	2	2-1/4	3/8
IL84-6Bx1/2-PVC	IL84-6BSx1/2-PVC	100	3/8-16	2	1/2	3/8
IL84-6Bx1-PVC	IL84-6BSx1-PVC	100	3/8-16	2	1	3/8
IL84-6Bx125-PVC	IL84-6BSx125-PVC	100	3/8-16	2	1-1/4	3/8
IL84-6Bx175-PVC	IL84-6BSx175-PVC	100	3/8-16	2	1-3/4	3/8
IL84-6Bx238-PVC	IL84-6BSx238-PVC	100	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL-PVC	IL84-6BSx275-HX-SL-PVC	100	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL-PVC	IL84-6BSx338-HX-SL-PVC	100	3/8-16	2	3-3/8	3/8

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL82-4Bx1/4	IL82-4BSx1/4	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2	IL82-4BSx1/2	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx3/4	IL82-4BSx3/4	100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx3/4-HX-SL		100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx1	IL82-4BSx1	100	1/4-20	1-1/2	1	3/8
IL82-4Bx1-HX-SL		100	1/4-20	1-1/2	1	3/8
IL82-4Bx125	IL82-4BSx125	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx150	IL82-4BSx150	100	1/4-20	1-1/2	1-1/2	3/8
IL82-4Bx175	IL82-4BSx175	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2	IL82-4BSx2	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275	IL82-4BSx275	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/4	IL82-5BSx1/4	500	5/16-18	1-1/2	1/4	3/8
IL82-5Bx1/2	IL82-5BSx1/2	500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx3/4	IL82-5BSx3/4	500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx1	IL82-5BSx1	500	5/16-18	1-1/2	1	3/8
IL82-5Bx1-HX-SL		500	5/16-18	1-1/2	1	3/8
IL82-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx125	IL82-5BSx125	500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175	IL82-5BSx175	500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/4	IL82-6BSx1/4	1000	3/8-16	1-1/2	1/4	3/8
IL82-6Bx1/2	IL82-6BSx1/2	1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	3/8
IL82-6Bx1	IL82-6BSx1	1000	3/8-16	1-1/2	1	3/8
IL82-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	3/8
IL82-6Bx125	IL82-6BSx125	1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx150	IL82-6BSx150	1000	3/8-16	1-1/2	1-1/2	3/8
IL82-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx175	IL82-6BSx175	1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238	IL82-6BSx238	1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	3/8
IL82-7Bx3/4	IL82-7BSx3/4	1500	1/2-13	1-1/2	3/4	3/8
IL82-7Bx1	IL82-7BSx1	1500	1/2-13	1-1/2	1	3/8
IL82-7Bx125	IL82-7BSx125	1500	1/2-13	1-1/2	1-1/4	3/8
IL82-7Bx150	IL82-7BSx150	1500	1/2-13	1-1/2	1-1/2	3/8
IL82-7Bx2	IL82-7BSx2	1500	1/2-13	1-1/2	2	3/8
IL82-7Bx238		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx238-HX		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx278	IL82-7BSx278	1500	1/2-13	1-1/2	2-7/8	3/8
IL82-7Bx3-HX		1500	1/2-13	1-1/2	3	3/8
IL84-4Bx1/4	IL84-4BSx1/4	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2	IL84-4BSx1/2	100	1/4-20	2	1/2	3/8
IL84-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-4Bx3/4	IL84-4BSx3/4	100	1/4-20	2	3/4	3/8
IL84-4Bx3/4-HX-SL		100	1/4-20	2	3/4	3/8
IL84-4Bx1	IL84-4BSx1	100	1/4-20	2	1	3/8
IL84-4Bx1-HX-SL		100	1/4-20	2	1	3/8
IL84-4Bx125	IL84-4BSx125	100	1/4-20	2	1-1/4	3/8
IL84-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-4Bx150	IL84-4BSx150	100	1/4-20	2	1-1/2	3/8
IL84-4Bx175	IL84-4BSx175	100	1/4-20	2	1-3/4	3/8
IL84-4Bx175-HX-SL		100	1/4-20	2	1-3/4	3/8
IL84-4Bx2	IL84-4BSx2	100	1/4-20	2	2	3/8
IL84-4Bx275	IL84-4BSx275	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/4	IL84-5BSx1/4	500	5/16-18	2	1/4	3/8
IL84-5Bx1/2	IL84-5BSx1/2	500	5/16-18	2	1/2	3/8
IL84-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-5Bx3/4	IL84-5BSx3/4	500	5/16-18	2	3/4	3/8
IL84-5Bx3/4-HX-SL		500	5/16-18	2	3/4	3/8
IL84-5Bx1	IL84-5BSx1	500	5/16-18	2	1	3/8
IL84-5Bx1-HX-SL		500	5/16-18	2	1	3/8
IL84-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-5Bx125	IL84-5BSx125	500	5/16-18	2	1-1/4	3/8
IL84-5Bx175	IL84-5BSx175	500	5/16-18	2	1-3/4	3/8
IL84-5Bx175-HX-SL		500	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL		500	5/16-18	2	2-1/4	3/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS


KNOB STYLE GLIDES

KNOB STYLE GLIDES

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

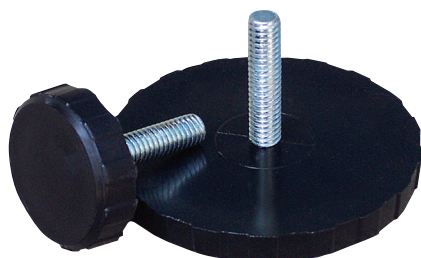


Top Hex (-HX)
and Slot (-SL)



Many colors available as custom option.

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS

P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL84-6Bx1/4	IL84-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-6Bx1/2	IL84-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-6Bx1	IL84-6BSx1	1000	3/8-16	2	1	3/8
IL84-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-6Bx125	IL84-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-6Bx150	IL84-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-6Bx175	IL84-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-6Bx238	IL84-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-7Bx3/4	IL84-7BSx3/4	1500	1/2-13	2	3/4	3/8
IL84-7Bx1	IL84-7BSx1	1500	1/2-13	2	1	3/8
IL84-7Bx125	IL84-7BSx125	1500	1/2-13	2	1-1/4	3/8
IL84-7Bx150	IL84-7BSx150	1500	1/2-13	2	1-1/2	3/8
IL84-7Bx2	IL84-7BSx2	1500	1/2-13	2	2	3/8
IL84-7Bx238		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx238-HX		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx278	IL84-7BSx278	1500	1/2-13	2	2-7/8	3/8
IL84-7Bx3-HX		1500	1/2-13	2	3	3/8
IL86-4Bx1/4	IL86-4BSx1/4	100	1/4-20	2-1/2	1/4	3/8
IL86-4Bx1/2	IL86-4BSx1/2	100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx1/2-HX-SL		100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx3/4	IL86-4BSx3/4	100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx3/4-HX-SL		100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx1	IL86-4BSx1	100	1/4-20	2-1/2	1	3/8
IL86-4Bx1-HX-SL		100	1/4-20	2-1/2	1	3/8
IL86-4Bx125	IL86-4BSx125	100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx125-HX-SL		100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx150	IL86-4BSx150	100	1/4-20	2-1/2	1-1/2	3/8
IL86-4Bx175	IL86-4BSx175	100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx175-HX-SL		100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx2	IL86-4BSx2	100	1/4-20	2-1/2	2	3/8
IL86-4Bx275	IL86-4BSx275	100	1/4-20	2-1/2	2-3/4	3/8
IL86-5Bx1/4	IL86-5BSx1/4	500	5/16-18	2-1/2	1/4	3/8
IL86-5Bx1/2	IL86-5BSx1/2	500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx1/2-HX-SL		500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx3/4	IL86-5BSx3/4	500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx3/4-HX-SL		500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx1	IL86-5BSx1	500	5/16-18	2-1/2	1	3/8
IL86-5Bx1-HX-SL		500	5/16-18	2-1/2	1	3/8
IL86-5Bx125-HX-SL		500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx125	IL86-5BSx125	500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx175	IL86-5BSx175	500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx175-HX-SL		500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx225-HX-SL		500	5/16-18	2-1/2	2-1/4	3/8
IL86-6Bx1/4	IL86-6BSx1/4	1000	3/8-16	2-1/2	1/4	3/8
IL86-6Bx1/2	IL86-6BSx1/2	1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx1/2-HX-SL		1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx3/4-HX-SL		1000	3/8-16	2-1/2	3/4	3/8
IL86-6Bx1	IL86-6BSx1	1000	3/8-16	2-1/2	1	3/8
IL86-6Bx1-HX-SL		1000	3/8-16	2-1/2	1	3/8
IL86-6Bx125	IL86-6BSx125	1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx125-HX-SL		1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx150	IL86-6BSx150	1000	3/8-16	2-1/2	1-1/2	3/8
IL86-6Bx175-HX-SL		1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx175	IL86-6BSx175	1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx238	IL86-6BSx238	1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-HX-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx275-HX-SL		1000	3/8-16	2-1/2	2-3/4	3/8
IL86-6Bx338-HX-SL		1000	3/8-16	2-1/2	3-3/8	3/8
IL86-7Bx3/4	IL86-7BSx3/4	1500	1/2-13	2-1/2	3/4	3/8
IL86-7Bx1	IL86-7BSx1	1500	1/2-13	2-1/2	1	3/8
IL86-7Bx125	IL86-7BSx125	1500	1/2-13	2-1/2	1-1/4	3/8
IL86-7Bx150	IL86-7BSx150	1500	1/2-13	2-1/2	1-1/2	3/8
IL86-7Bx2	IL86-7BSx2	1500	1/2-13	2-1/2	2	3/8
IL86-7Bx238		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx238-HX		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx278	IL86-7BSx278	1500	1/2-13	2-1/2	2-7/8	3/8
IL86-7Bx3-HX		1500	1/2-13	2-1/2	3	3/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

KNOB STYLE GLIDES

KNOB STYLE GLIDES


The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

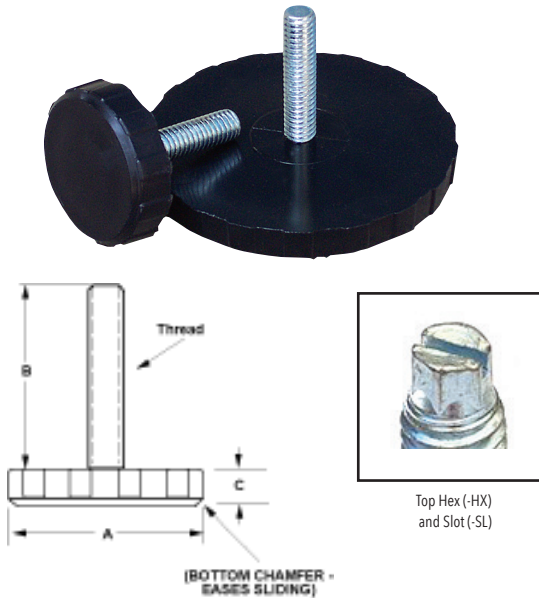

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL88-4Bx1/4	IL88-4BSx1/4	100	1/4-20	3	1/4	3/8
IL88-4Bx1/2	IL88-4BSx1/2	100	1/4-20	3	1/2	3/8
IL88-4Bx1/2-HX-SL		100	1/4-20	3	1/2	3/8
IL88-4Bx3/4	IL88-4BSx3/4	100	1/4-20	3	3/4	3/8
IL88-4Bx3/4-HX-SL		100	1/4-20	3	3/4	3/8
IL88-4Bx1	IL88-4BSx1	100	1/4-20	3	1	3/8
IL88-4Bx1-HX-SL		100	1/4-20	3	1	3/8
IL88-4Bx125	IL88-4BSx125	100	1/4-20	3	1-1/4	3/8
IL88-4Bx125-HX-SL		100	1/4-20	3	1-1/4	3/8
IL88-4Bx150	IL88-4BSx150	100	1/4-20	3	1-1/2	3/8
IL88-4Bx175	IL88-4BSx175	100	1/4-20	3	1-3/4	3/8
IL88-4Bx175-HX-SL		100	1/4-20	3	1-3/4	3/8
IL88-4Bx2	IL88-4BSx2	100	1/4-20	3	2	3/8
IL88-4Bx275	IL88-4BSx275	100	1/4-20	3	2-3/4	3/8
IL88-5Bx1/4	IL88-5BSx1/4	500	5/16-18	3	1/4	3/8
IL88-5Bx1/2	IL88-5BSx1/2	500	5/16-18	3	1/2	3/8
IL88-5Bx1/2-HX-SL		500	5/16-18	3	1/2	3/8
IL88-5Bx3/4	IL88-5BSx3/4	500	5/16-18	3	3/4	3/8
IL88-5Bx3/4-HX-SL		500	5/16-18	3	3/4	3/8
IL88-5Bx1	IL88-5BSx1	500	5/16-18	3	1	3/8
IL88-5Bx1-HX-SL		500	5/16-18	3	1	3/8
IL88-5Bx125-HX-SL		500	5/16-18	3	1-1/4	3/8
IL88-5Bx125	IL88-5BSx125	500	5/16-18	3	1-1/4	3/8
IL88-5Bx175	IL88-5BSx175	500	5/16-18	3	1-3/4	3/8
IL88-5Bx175-HX-SL		500	5/16-18	3	1-3/4	3/8
IL88-5Bx225-HX-SL		500	5/16-18	3	2-1/4	3/8
IL88-6Bx1/4	IL88-6BSx1/4	1000	3/8-16	3	1/4	3/8
IL88-6Bx1/2	IL88-6BSx1/2	1000	3/8-16	3	1/2	3/8
IL88-6Bx1/2-HX-SL		1000	3/8-16	3	1/2	3/8
IL88-6Bx3/4-HX-SL		1000	3/8-16	3	3/4	3/8
IL88-6Bx1	IL88-6BSx1	1000	3/8-16	3	1	3/8
IL88-6Bx1-HX-SL		1000	3/8-16	3	1	3/8
IL88-6Bx125	IL88-6BSx125	1000	3/8-16	3	1-1/4	3/8
IL88-6Bx125-HX-SL		1000	3/8-16	3	1-1/4	3/8
IL88-6Bx150	IL88-6BSx150	1000	3/8-16	3	1-1/2	3/8
IL88-6Bx175-HX-SL		1000	3/8-16	3	1-3/4	3/8
IL88-6Bx175	IL88-6BSx175	1000	3/8-16	3	1-3/4	3/8
IL88-6Bx238	IL88-6BSx238	1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-HX-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx275-HX-SL		1000	3/8-16	3	2-3/4	3/8
IL88-6Bx338-HX-SL		1000	3/8-16	3	3-3/8	3/8

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending



Many colors available as custom option.


BLACK NYLON THREADED KNOB HUBS

P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4



KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot (-SL) are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.

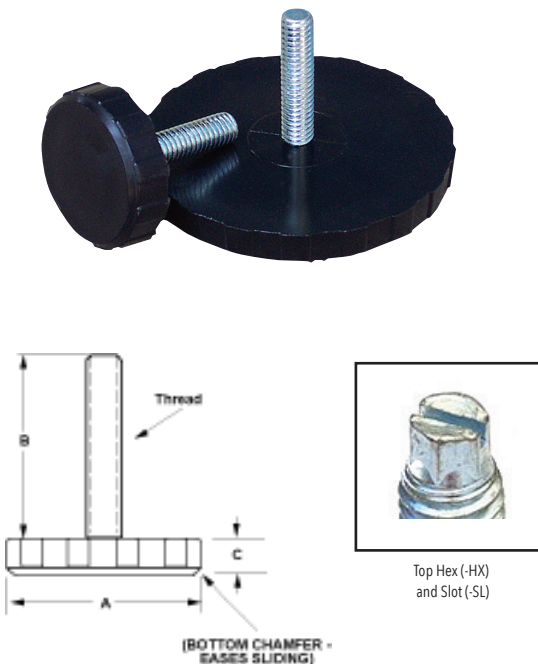

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10

36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.



Many colors available as custom option.


Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10



KNOB STYLE GLIDES – NYLON THREADS

The IEC Knob Style Nylon Thread Glide is ideal for light duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

Nylon threads are especially beneficial for food, medical, marine, electrical, outdoor furniture and many other applications where electrical isolation, magnetism or corrosion is a concern.



For higher load ratings, more thread sizes in steel and stainless steel and top hex and slot features, see IEC's Knob Style Glides in our Medium Duty Leveler catalog.



Many colors available as custom option.

Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides					
IL82-4BX3/8-NYL	50	1/4-20	1-1/2	3/8	3/8
IL82-4BX1/2-NYL	50	1/4-20	1-1/2	1/2	3/8
IL82-4BX5/8-NYL	50	1/4-20	1-1/2	5/8	3/8
IL82-4BX7/8-NYL	50	1/4-20	1-1/2	7/8	3/8
IL82-4BX1-NYL	50	1/4-20	1-1/2	1	3/8
IL82-4BX1-3/8-NYL	50	1/4-20	1-1/2	1-3/8	3/8
IL82-4BX1-7/8-NYL	50	1/4-20	1-1/2	1-7/8	3/8
IL82-5BX3/8-NYL	75	5/16-18	1-1/2	3/8	3/8
IL82-5BX5/8-NYL	75	5/16-18	1-1/2	5/8	3/8
IL82-5BX7/8-NYL	75	5/16-18	1-1/2	7/8	3/8
IL82-5BX1-NYL	75	5/16-18	1-1/2	1	3/8
IL82-5BX1-3/8-NYL	75	5/16-18	1-1/2	1-3/8*	3/8
IL82-5BX1-7/8-NYL	75	5/16-18	1-1/2	1-7/8*	3/8
IL82-5BX2-3/8-NYL	75	5/16-18	1-1/2	2-3/8*	3/8
IL82-6BX3/8-NYL	100	3/8-16	1-1/2	3/8	3/8
IL82-6BX5/8-NYL	100	3/8-16	1-1/2	5/8	3/8
IL82-6BX7/8-NYL	100	3/8-16	1-1/2	7/8	3/8
IL82-6BX1-NYL	100	3/8-16	1-1/2	1	3/8
IL82-6BX1-3/8-NYL	100	3/8-16	1-1/2	1-3/8	3/8
IL82-6BX1-7/8-NYL	100	3/8-16	1-1/2	1-7/8	3/8
IL82-6BX2-3/8-NYL	100	3/8-16	1-1/2	2-3/8	3/8
IL84-4BX3/8-NYL	50	1/4-20	2	3/8	3/8
IL84-4BX1/2-NYL	50	1/4-20	2	1/2	3/8
IL84-4BX5/8-NYL	50	1/4-20	2	5/8	3/8
IL84-4BX7/8-NYL	50	1/4-20	2	7/8	3/8
IL84-4BX1-NYL	50	1/4-20	2	1	3/8
IL84-4BX1-3/8-NYL	50	1/4-20	2	1-3/8	3/8
IL84-4BX1-7/8-NYL	50	1/4-20	2	1-7/8	3/8
IL84-5BX3/8-NYL	75	5/16-18	2	3/8	3/8
IL84-5BX5/8-NYL	75	5/16-18	2	5/8	3/8
IL84-5BX7/8-NYL	75	5/16-18	2	7/8	3/8
IL84-5BX1-NYL	75	5/16-18	2	1	3/8
IL84-5BX1-3/8-NYL	75	5/16-18	2	1-3/8*	3/8
IL84-5BX1-7/8-NYL	75	5/16-18	2	1-7/8*	3/8
IL84-5BX2-3/8-NYL	75	5/16-18	2	2-3/8*	3/8

* Partially threaded 1" length


Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides (continued)					
IL84-6BX3/8-NYL	100	3/8-16	2	3/8	3/8
IL84-6BX5/8-NYL	100	3/8-16	2	5/8	3/8
IL84-6BX7/8-NYL	100	3/8-16	2	7/8	3/8
IL84-6BX1-NYL	100	3/8-16	2	1	3/8
IL84-6BX1-3/8-NYL	100	3/8-16	2	1-3/8	3/8
IL84-6BX1-7/8-NYL	100	3/8-16	2	1-7/8	3/8
IL84-6BX2-3/8-NYL	100	3/8-16	2	2-3/8	3/8
IL86-4BX3/8-NYL	50	1/4-20	2-1/2	3/8	3/8
IL86-4BX1/2-NYL	50	1/4-20	2-1/2	1/2	3/8
IL86-4BX5/8-NYL	50	1/4-20	2-1/2	5/8	3/8
IL86-4BX7/8-NYL	50	1/4-20	2-1/2	7/8	3/8
IL86-4BX1-NYL	50	1/4-20	2-1/2	1	3/8
IL86-4BX1-3/8-NYL	50	1/4-20	2-1/2	1-3/8	3/8
IL86-4BX1-7/8-NYL	50	1/4-20	2-1/2	1-7/8	3/8
IL86-5BX3/8-NYL	75	5/16-18	2-1/2	3/8	3/8
IL86-5BX5/8-NYL	75	5/16-18	2-1/2	5/8	3/8
IL86-5BX7/8-NYL	75	5/16-18	2-1/2	7/8	3/8
IL86-5BX1-NYL	75	5/16-18	2-1/2	1	3/8
IL86-5BX1-3/8-NYL	75	5/16-18	2-1/2	1-3/8*	3/8
IL86-5BX1-7/8-NYL	75	5/16-18	2-1/2	1-7/8*	3/8
IL86-5BX2-3/8-NYL	75	5/16-18	2-1/2	2-3/8*	3/8
IL86-6BX3/8-NYL	100	3/8-16	2-1/2	3/8	3/8
IL86-6BX5/8-NYL	100	3/8-16	2-1/2	5/8	3/8
IL86-6BX7/8-NYL	100	3/8-16	2-1/2	7/8	3/8
IL86-6BX1-NYL	100	3/8-16	2-1/2	1	3/8
IL86-6BX1-3/8-NYL	100	3/8-16	2-1/2	1-3/8	3/8
IL86-6BX1-7/8-NYL	100	3/8-16	2-1/2	1-7/8	3/8
IL86-6BX2-3/8-NYL	100	3/8-16	2-1/2	2-3/8	3/8
IL88-4BX3/8-NYL	50	1/4-20	3	3/8	3/8
IL88-4BX1/2-NYL	50	1/4-20	3	1/2	3/8
IL88-4BX5/8-NYL	50	1/4-20	3	5/8	3/8
IL88-4BX7/8-NYL	50	1/4-20	3	7/8	3/8
IL88-4BX1-NYL	50	1/4-20	3	1	3/8
IL88-4BX1-3/8-NYL	50	1/4-20	3	1-3/8	3/8
IL88-4BX1-7/8-NYL	50	1/4-20	3	1-7/8	3/8
IL88-5BX3/8-NYL	75	5/16-18	3	3/8	3/8
IL88-5BX5/8-NYL	75	5/16-18	3	5/8	3/8
IL88-5BX7/8-NYL	75	5/16-18	3	7/8	3/8
IL88-5BX1-NYL	75	5/16-18	3	1	3/8
IL88-5BX1-3/8-NYL	75	5/16-18	3	1-3/8*	3/8
IL88-5BX1-7/8-NYL	75	5/16-18	3	1-7/8*	3/8
IL88-5BX2-3/8-NYL	75	5/16-18	3	2-3/8*	3/8
IL88-6BX3/8-NYL	100	3/8-16	3	3/8	3/8
IL88-6BX5/8-NYL	100	3/8-16	3	5/8	3/8
IL88-6BX7/8-NYL	100	3/8-16	3	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	3	1	3/8
IL88-6BX1-3/8-NYL	100	3/8-16	3	1-3/8	3/8
IL88-6BX1-7/8-NYL	100	3/8-16	3	1-7/8	3/8
IL88-6BX2-3/8-NYL	100	3/8-16	3	2-3/8	3/8

* Partially threaded 1" length




Nail Glides

9-Light Duty, Steel Base, (Nail Glide) with Rubber Cushion These *steel glides* have a rubber cushion on top of the nickel plated steel base which reduces noise. The nail presses easily into the wood.

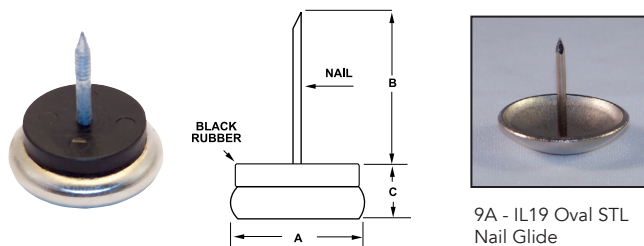

9A - IL19 Oval STL Nail Glide

10-Light Duty, Flat Plastic Base, (Nail Glide) These *nail glides* have a flat plastic base. The nail presses easily into the wood.

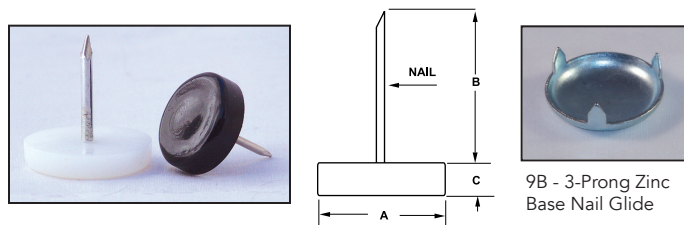

9B - 3-Prong Zinc Base Nail Glide

10A-Light Duty, Flat Plastic Base, (Nail Glide) with Rubber Cushion These *nail glides* have a flat plastic white nylon base with black rubber cushion. The nail presses easily into the wood.




10A - Light Duty Flat Plastic Base w/Rubber Cushion Nail Glide

10B-Light Duty, Brown Flat Plastic Base, (Nail Glide) These *nail glides* have a flat plastic brown nylon base. The nail presses easily into the wood.



10B - Light Duty Flat Plastic Base Nail Glide

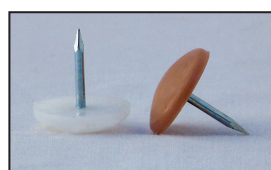

10D & 10E - Light Duty Oval Nail Glides

Part Nbr.	Stem	A	B	C	Base
-----------	------	---	---	---	------

9-Light Duty, Steel Base, (Nail Glide) with Rubber Cushion

IL19-N1	NAIL	7/8	1/4	3/8	Steel
IL19-N2	NAIL	1-1/16	1/4	3/8	Steel
IL19-N3	NAIL	1-1/4	1/4	3/8	Steel

9A-Oval Nickel Base, (Nail Glide)

IL19-OVAL-1	NAIL	1/2	9/16	1/8	Nickel
IL19-OVAL-2	NAIL	5/8	3/4	1/8	Nickel
IL19-OVAL-3	NAIL	3/4	3/4	1/8	Nickel
IL19-OVAL-4	NAIL	7/8	7/8	1/8	Nickel
IL19-OVAL-5	NAIL	1	11/16	1/8	Nickel

9B-3-Prong Oval Zinc Base, (Nail Glide)

IL19-3P-1	3 PRONG	5/8	1/4	3/16	Zinc
IL19-3P-2	3 PRONG	3/4	1/4	3/16	Zinc
IL19-3P-3	3 PRONG	7/8	7/32	1/4	Zinc
IL19-3P-4	3 PRONG	1-1/8	7/32	7/32	Zinc

Part Nbr.	Stem	A	B	C	Base
-----------	------	---	---	---	------

10-Light Duty, White, Flat Plastic Base, (Nail Glide)

IL20-0	NAIL	1/2	3/4	1/4	White
IL20-1	NAIL	5/8	3/4	1/4	White
IL20-2	NAIL	3/4	3/4	1/4	White
IL20-3	NAIL	7/8	3/4	1/4	White
IL20-4	NAIL	1-1/8	3/4	1/4	White

10-Light Duty, Black, Flat Plastic Base, (Nail Glide)

IL20-0B	NAIL	1/2	3/4	1/4	Black
IL20-1B	NAIL	5/8	3/4	1/4	Black
IL20-2B	NAIL	3/4	3/4	1/4	Black
IL20-3B	NAIL	7/8	3/4	1/4	Black
IL20-4B	NAIL	1-1/8	3/4	1/4	Black

Part Nbr.	Stem	A	B	C	Base
-----------	------	---	---	---	------

10A-Light Duty, Flat Plastic Base, (Nail Glide) with Rubber Cushion

IL20-0-RC	NAIL	1/2	3/4	3/8	White
IL20-1-RC	NAIL	5/8	3/4	3/8	White
IL20-2-RC	NAIL	3/4	3/4	3/8	White
IL20-3-RC	NAIL	7/8	3/4	3/8	White
IL20-4-RC	NAIL	1-1/8	3/4	3/8	White

Part Nbr.	Stem	A	B	C	Base
-----------	------	---	---	---	------

10B-Light Duty, Brown, Flat Plastic Base, (Nail Glide)

IL20-0-BR	NAIL	1/2	11/16	1/4	Brown
IL20-1-BR	NAIL	5/8	11/16	1/4	Brown
IL20-2-BR	NAIL	3/4	11/16	1/4	Brown
IL20-3-BR	NAIL	7/8	11/16	1/4	Brown

Part Nbr.	Stem	A	B	C	Base
-----------	------	---	---	---	------

10D-Light Duty, Brown Oval Plastic Base, (Nail Glide)

IL21-1-BR	NAIL	1/2	11/16	3/16	Brown
IL21-2-BR	NAIL	5/8	11/16	1/4	Brown
IL21-3-BR	NAIL	3/4	11/16	1/4	Brown
IL21-4-BR	NAIL	7/8	11/16	1/4	Brown
IL21-5-BR	NAIL	1	11/16	1/4	Brown

10E-Light Duty, White Oval Plastic Base, (Nail Glide)

IL21-1	NAIL	1/2	3/4	1/4	White
IL21-2	NAIL	5/8	3/4	1/4	White
IL21-3	NAIL	3/4	3/4	1/4	White
IL21-4	NAIL	7/8	3/4	1/4	White
IL21-5	NAIL	1	3/4	1/4	White



Nail Glides, Sliders and Bumpers


11-Light Duty, (Oval) Plastic Base, (Nail Glide) These *nail glides* have a white oval plastic base. The nail presses easily into the wood.




11A - Nail Felt Glides



11B - Oval Felt Glides

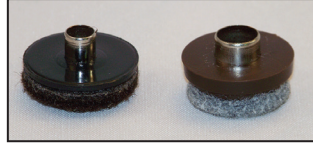

11C - Rivet Nail Felt Glides - Brown (left) & Grey

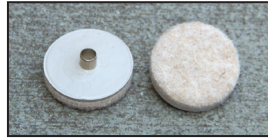


11C - Rivet Nail Felt Glides - Beige



11D - Rivet Nail Polymer Sliders



11E - Nail-in Rubber Bumpers




11F - Dual Nail Glide

PTFE Nail Sliders

11G-PTFE Nail Sliders with Rubber Cushion

These PTFE *nail sliders* (similar to Teflon®) have a gray base with a black rubber top cushion.



Part Nbr.	Dia	Felt Thick.	Color
-----------	-----	-------------	-------

11A-Regular Nail Felt Glides

IL20-2-FELT-NL-BG	3/4	5/16	GREY
IL20-3-FELT-NL-BG	7/8	5/16	GREY
IL20-4-FELT-NL-BG	1	5/16	GREY
IL20-5-FELT-NL-BG	1-1/8	5/16	GREY

11B-Regular Nail Felt Glides - Oval

IL21-5-FELT-NL-OVAL	1	1/8	GREY
IL21-6-FELT-NL-OVAL	1-1/4	1/8	GREY

11C-Rivet Nail Felt Glides

IL20-3-FELT-RV-BE	7/8	5/16	BEIGE
IL20-3-FELT-RV-BR	7/8	5/16	BROWN
IL20-3-FELT-RV-BG	7/8	5/16	GREY
IL20-4-FELT-RV-BE	1-1/4	5/16	BEIGE
IL20-4-FELT-RV-BR	1-1/4	5/16	BROWN
IL20-4-FELT-RV-BG	1-1/4	5/16	GREY

11D-Nail-In Sliders

P/N	Dia.	Thick.	Color	Pkg
IL25-SLDR-N	1	1/4	WHITE	20
IL25-SLDR-N-100	1	1/4	WHITE	100
IL27-SLDR-N	1-1/2	1/4	WHITE	20
IL27-SLDR-N-100	1-1/2	1/4	WHITE	100

11E-Half Spherical Nail-In Bumpers

P/N	Color	Dia.	Height	Nail Length
IL397-B	BLACK	3/8	7/32	3/8
IL397-BR	BROWN	3/8	7/32	3/8
IL398-B	BLACK	1/2	5/16	3/8
IL398A-B	BLACK	3/4	1/2	3/8

11F-Dual Nail Glide

P/N	Color	Width	Height	Length	Nail Length
IL21-NB	BROWN	9/16	1/4	1-3/4	7/16
IL21-NW	WHITE	9/16	1/4	1-3/4	7/16

11G-PTFE Nail Sliders with Rubber Cushion

P/N	Color	Diameter	Height	Nail Length
IL20-2-PTFE	GRAY	3/4	3/16	5/8
IL20-3-PTFE	GRAY	7/8	3/16	5/8
IL20-4-PTFE	GRAY	1	3/16	5/8
IL20-5-PTFE	GRAY	1-1/8	1/4	5/8
IL20-6-PTFE	GRAY	1-1/2	1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com


LIGHT-DUTY LEVELERS

WOOD SCREW GLIDES

CABINET FEET

Wood Screw Glides

IEC's *wood screw glides* shown here allow for easy sliding. They have a PTFE base with a black rubber cushion top. They can also use sheet metal screws and standard machine screws with or without a nut.



Wood Screw Glides

P/N	Dia.	Base Height	Hole Size	Thread
IL25-SLDR-WOOD	1	3/16	3/16	#6 x 5/8
IL27A-SLDR-WOOD	2	1/4	3/16	#6 x 5/8





Wood Screw Felt Pad Glides

P/N	Dia.	Felt Thick.	Color
IL20-2-FELT-WOOD	3/4	3/8	GREY
IL20-3-FELT-WOOD	7/8	3/8	GREY
IL20-4-FELT-WOOD	1	3/8	GREY
IL20-5-FELT-WOOD	1-1/8	3/8	GREY

Cabinet Feet

38-Cabinet Feet Bumpers IEC *plastic cabinet feet* are ideal for light cabinets, tables and furniture. They attach to wood, metal or plastic. They are supplied with panhead wood screws.

39-Thermo-Plastic Rubber Feet/Bumpers IEC's *thermo-plastic rubber feet/bumpers*.

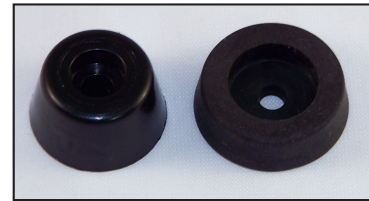

38-Cabinet Feet

P/N	A	B HOLE DIA.	C	D	E TAPER	F	USES SCREW	COLOR
IL24-CAB-3/8	7/8	5/32	3/16	3/8	8	5/16	A	BLACK
IL24-CAB-1/2	7/8	13/64	1/4	1/2	10	3/8	B	BLACK
IL24-CAB-5/8	7/8	13/64	1/4	5/8	8	3/8	B	BLACK
IL24-CAB-5/8-BRN	7/8	13/64	1/4	5/8	8	3/8	C	BROWN
IL25-CAB-3/4	1	13/64	3/8	3/4	8	3/8	C	BLACK
IL25-CAB-3/4-BRN	1	13/64	3/8	3/4	8	3/8	D	BROWN
IL25A-CAB-1	1-1/8	1/4	3/8	1	6	1/2	D	BLACK
IL25A-CAB-1-BRN	1-1/8	1/4	3/8	1	6	1/2	D	BROWN

39-Thermo-Plastic Rubber Feet / Bumpers

P/N	A	B HOLE DIA.	C	D	F	USES SCREW	COLOR
IL24D-CAB-RBR	3/8	1/8	.08	.22	.30	E	BLACK
IL24C-CAB-RBR	1/2	.15	.15	.25	.28	A	BLACK
IL24A-CAB-RBR	3/4	.17	.17	.28	.38	B	BLACK
IL25-CAB-RBR	1	.18	.18	.31	.60	B	BLACK

Pan Head Wood Screws (zinc-plated):

A = #6 x 5/8"

B = #8 x 5/8"

C = #8 x 1"

D = #10 x 3/4"

E = #4 x 5/8"



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS


TUBE GLIDES

Tube Glides

12-Light Duty, Nylon or Steel (S) Base, Round Tubing Glide These *swivel glides* have a nylon or steel base. The spring-steel star clip (inside the metal ferrule) presses into round hollow tubing. Also available without the spring-steel clip for solid tubing.



13-Light Duty, Steel or Nylon (N) Base, Square Tubing Glide These *steel or nylon base swivel glides* have a rubber cushion on top of the nickel plated steel base which reduces noise. The spring-steel star clip presses into square tubing.



Snap On Nylon Cap

Available for IL22 and IL23 (see page 10).



Felt & Steel Base Tube Glides

These black felt and steel tube glides have a non-swivel base. The flexible fins fit 16 or 18 gauge tubing. Steel base glides slide easily on carpet.



Swivel Tube Glides

These *black plastic tube glides* swivel approx. 30 degrees. Available with solid nylon base, felt base or steel base. Steel base glides slide easily on carpet. Coming Soon: Teflon slider and non-skid rubber bases.



Part Nbr.	Tube O.D.	A	B	C	Base
12-Light Duty (Round Tubing) Glide					
IL22-R1	5/8	1-1/16	9/16	3/4	Nylon
IL22-R2	3/4	1-1/16	9/16	3/4	Nylon
IL22-R3	7/8	1-1/16	1/2	3/4	Nylon
IL22-R4	1	1-1/16	1/2	3/4	Nylon
IL22-R5	1-1/4	1-1/4	1/2	3/4	Nylon
IL22-R1S	5/8	1-1/16	9/16	7/16	Steel
IL22-R2S	3/4	1-1/16	9/16	7/16	Steel
IL22-R3S	7/8	1-1/16	1/2	7/16	Steel
IL22-R4S	1	1-1/16	1/2	7/16	Steel
13-Light Duty (Square Tubing) Glide					
IL23-S1	7/8	1-1/16	3/8	7/16	Steel
IL23-S2	1	1-1/16	3/8	7/16	Steel
IL23-S3	1-1/8	1-1/16	3/8	7/16	Steel
IL23-S4	1-1/4	1-1/16	3/8	7/16	Steel
IL23-S1N	7/8	1-1/16	3/8	7/16	Nylon
IL23-S2N	1	1-1/16	3/8	7/16	Nylon
IL23-S3N	1-1/8	1-1/16	3/8	7/16	Nylon
IL23-S4N	1-1/4	1-1/16	3/8	7/16	Nylon

Non-Swivel Felt Tube Glides

P/N (ROUND)	TUBE O.D.	GAUGE	FIN HT
IL24A-PLUG-FELT	3/4	16-18	3/4
IL24-PLUG-FELT	7/8	16-18	3/4
IL25-PLUG-FELT	1	16-18	3/4
IL25A-PLUG-FELT	1-1/8	16-18	3/4
IL26-PLUG-FELT	1-1/4	16-18	3/4

Non-Swivel Steel Base Tube Glides

P/N (ROUND)	TUBE O.D.	GAUGE	FIN HT
IL24A-PLUG-STL	3/4	16-18	3/4
IL24-PLUG-STL	7/8	16-18	3/4
IL25-PLUG-STL	1	16-18	3/4
IL25A-PLUG-STL	1-1/8	16-18	3/4
IL26-PLUG-STL	1-1/4	16-18	3/4

Swivel Tube Glides – Nylon

P/N (ROUND)	TUBE O.D.	GAUGE	FIN HT
IL24A-PLUG-SVL	3/4	16-18	1
IL24-PLUG-SVL	7/8	16-18	1
IL25-PLUG-SVL	1	16-18	1
IL25A-PLUG-SVL	1-1/8	16-18	1

Swivel Tube Glides – Felt

P/N (ROUND)	TUBE O.D.	GAUGE	FIN HT
IL24A-PLUG-SVL-FELT	3/4	16-18	1
IL24-PLUG-SVL-FELT	7/8	16-18	1
IL25-PLUG-SVL-FELT	1	16-18	1
IL25A-PLUG-SVL-FELT	1-1/8	16-18	1

Swivel Tube Glides – Steel


P/N (ROUND)	TUBE O.D.	GAUGE	FIN HT
IL24A-PLUG-SVL-STL	3/4	16-18	1
IL24-PLUG-SVL-STL	7/8	16-18	1
IL25-PLUG-SVL-STL	1	16-18	1
IL25A-PLUG-SVL-STL	1-1/8	16-18	1



Tube Glides

Octagon Leveler & Tube Insert Set

These *black nylon tube inserts and threaded octagon leveler* combinations are designed to fit hollow tubing. They support 100 lb loads and adjust 1" in height. For heavy duty applications use the steel "star clip" threaded inserts in the Light Duty Leveler section.

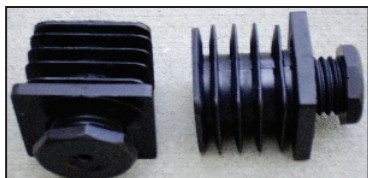


Angeled Tube Glides

These *black plastic tube glides* have a 5, 15 or 25 degree angle.



Domed Tube Caps (Plug Type)

These *black polyethylene tube caps* have a domed surface which can accommodate any leg angle. The ribbed fins are flexible allowing these inserts to fit varying wall thicknesses (16-20 gauge).



Octagon Square – Leveler

P/N (square)	Tubing O.D.	Tubing Gauge
IL24A-SQ-OCT	3/4	16-18
IL24-SQ-OCT	7/8	16-18
IL25-SQ-OCT	1	16-18
IL25A-SQ-OCT	1-1/8	16-18
IL26A-SQ-OCT	1-3/8	16-18
IL27-SQ-OCT	1-1/2	16-18
IL27B-SQ-OCT	1-3/4	16-18
IL27A-SQ-OCT	2	16-18

Octagon Round – Leveler

P/N (round)	Tubing O.D.	Tubing Gauge
IL26-RD-OCT	1-1/4	16-18
IL26A-RD-OCT	1-3/8	16-18
IL27-RD-OCT	1-1/2	16-18
IL27B-RD-OCT	1-3/4	16-18
IL27A-RD-OCT	2	16-18
IL27A2-RD-OCT	2-1/4	16-18

Angled Tube Glides

P/N (ROUND)	TUBE O.D.	GAUGE	FIN Height
IL24A-PLUG-ANGLE-5	3/4	16-18	5
IL24A-PLUG-ANGLE-25	3/4	16-18	25
IL24-PLUG-ANGLE-5	7/8	16-18	5
IL24-PLUG-ANGLE-25	7/8	16-18	25
IL25-PLUG-ANGLE-15	1	16-18	15

Square – Domed Type

P/N (square)	Tubing O.D.	Tubing Gauge
IL24A-SQ-CAP-DOME	3/4	16-20 GA
IL24-SQ-CAP-DOME	7/8	16-20 GA
IL25-SQ-CAP-DOME	1	16-20 GA

Round – Domed Type

P/N (round)	Tubing O.D.	Tubing Gauge
IL24B-RD-CAP-DOME	5/8	16-20 GA
IL24A-RD-CAP-DOME	3/4	16-20 GA
IL24-RD-CAP-DOME	7/8	16-20 GA
IL25-RD-CAP-DOME	1	16-20 GA
IL26-RD-CAP-DOME	1-1/4	16-20 GA
IL27-RD-CAP-DOME	1-1/2	16-20 GA
IL27B-RD-CAP-DOME	1-3/4	16-20 GA


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS**TUBE ENDS****Tube Ends - Star Type**

14- Star Type Threaded Tube Ends These *metal, star-type threaded tube ends* are designed to fit inside square or round (16-18 gauge) tubing. Also available for other gauge sizes. Two-sided and four-sided grater clip style also available upon request.




(IL24-IL27A)



(IL27-7 & IL27A-7)

14A- Star Type Tube Connectors These *metal, star-type threaded tube connectors* are designed to fit inside square or round (16-18 gauge) tubing.



(IL25-4-TC Tube Connectors)

Square P/N	Round P/N	Thread	Tubing O.D.
14-Star Type Threaded Inserts			
IL24A-4	IL24A-R4	1/4-20	3/4
IL24-4	IL24-R4	1/4-20	7/8
IL25-4	IL25-R4	1/4-20	1
IL25A-4	IL25A-R4	1/4-20	1-1/8
IL26-4	IL26-R4	1/4-20	1-1/4
IL27-4	IL27-R4	1/4-20	1-1/2
IL27A-4	IL27A-R4	1/4-20	2
IL24-5	IL24-R5	5/16-18	7/8
IL25-5	IL25-R5	5/16-18	1
IL25A-5	IL25A-R5	5/16-18	1-1/8
IL26-5	IL26-R5	5/16-18	1-1/4
IL27-5	IL27-R5	5/16-18	1-1/2
IL27A-5	IL27A-R5	5/16-18	2
IL24-6	IL24-R6	3/8-16	7/8
IL25-6	IL25-R6	3/8-16	1
IL25A-6	IL25A-R6	3/8-16	1-1/8
IL26-6	IL26-R6	3/8-16	1-1/4
IL27-6	IL27-R6	3/8-16	1-1/2
IL27A-6	IL27A-R6	3/8-16	2
IL27-7	IL27-R7*	1/2-13	1-1/2
IL27A-7	IL27A-R7*	1/2-13	2

* 2 star clips on round 1/2-13 size (not 4)

Part Nbr.	Thread	Tube O.D.	Tube I.D.	Gauge
14A-Tube Connectors				
IL24B-4-TC	1/4-20	5/8	.53-.54	18-19
IL24A-3-TC	10-24	3/4	.62-.65	16-18
IL24A-4-TC	1/4-20	3/4	.62-.65	16-18
IL24A-5-TC	5/16-18	3/4	.62-.65	16-18
IL24-4-TC	1/4-20	7/8	.75-.78	16-18
IL24-5-TC	5/16-18	7/8	.75-.78	16-18
IL24-6-TC	3/8-16	7/8	.75-.78	16-18
IL25-4-TC	1/4-20	1	.87-.90	16-18
IL25-4-TC-12	1/4-20	1	.78-.84	12-14
IL25-5-TC	5/16-18	1	.87-.90	16-18
IL25-6-TC	3/8-16	1	.87-.90	16-18
IL25A-4-TC	1/4-20	1-1/8	.99-1.03	16-18
IL25A-5-TC	5/16-18	1-1/8	.99-1.03	16-18
IL25A-6-TC	3/8-16	1-1/8	.99-1.03	16-18
IL26-4-TC	1/4-20	1-1/4	1.12-1.15	16-18
IL26-5-TC	5/16-18	1-1/4	1.12-1.15	16-18
IL26-6-TC	3/8-16	1-1/4	1.12-1.15	16-18
IL26A-4-TC	1/4-20	1-3/8	1.24-1.28	16-18
IL27-4-TC	1/4-20	1-1/2	1.37-1.40	16-18
IL27-5-TC	5/16-18	1-1/2	1.37-1.40	16-18
IL27-6-TC	3/8-16	1-1/2	1.37-1.40	16-18
IL27B-4-TC	1/4-20	1-3/4	1.62-1.65	16-18
IL27B-5-TC	5/16-18	1-3/4	1.62-1.65	16-18
IL27B-6-TC	3/8-16	1-3/4	1.62-1.65	16-18
IL27A-4-TC	1/4-20	2	1.87-1.90	16-18
IL27A-4-TC-20	1/4-20	2	1.93-1.95	20-22
IL27A-5-TC	5/16-18	2	1.62-1.65	16-18
IL27A-5-TC-20	5/16-18	2	1.93-1.95	20-22
IL27A-6-TC	3/8-16	2	1.62-1.65	16-18
IL27A2-4-TC	1/4-20	2-1/4	2.12-2.15	16-18

NOTE: IL28-IL30 moved to end of section.



Sled Glides - Clear & Felt

IEC's *clear plastic and felt sled glides* snap over rods or tubing to reduce scratching and noise. Also available with heavy-duty floor protection felt bonded to the plastic glide.



CLEAR PLASTIC AND FELT SLED GLIDES

P/N	P/N	Tube/Rod Dia.
IL24D-SLED-CLR	IL24D-SLED-FELT	3/8
IL24C2-SLED-CLR	IL24C2-SLED-FELT	7/16
IL24B-SLED-CLR	IL24B-SLED-FELT	5/8
IL24A-SLED-CLR	IL24A-SLED-FELT	3/4
IL24-SLED-CLR	IL24-SLED-FELT	7/8
IL25-SLED-CLR	IL25-SLED-FELT	1
IL25A-SLED-CLR	IL25A-SLED-FELT	1-1/8

Sled Glides - Single Prong

IEC's *single prong sled glides* are designed to snap into a horizontal chair or table leg with a drilled hole.

SLED GLIDES — SINGLE PRONG

P/N	Tube/Rod Dia.	Color
IL24B-SLED-PRG	5/8	CLEAR
IL24-SLED-PRG	7/8	BLACK
IL25-SLED-PRG	1	BLACK



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS


WELD & T-NUTS

Weld & T-Nuts


15-Weld Nuts, Round Base (3 Bosses, Barrel Side) These *steel weld nuts* are zinc plated and designed for metal applications. Also available unplated and in stainless steel (add -SS to P/N) on select sizes.*

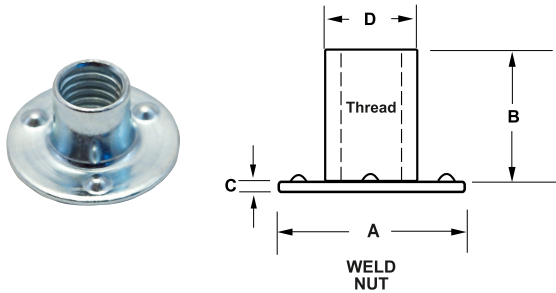

16-Pronged Tee-Nuts These 3 or 4 pronged *steel t-nuts* are zinc plated and designed for wood applications. Some sizes also available in stainless steel (add -SS to P/N).*

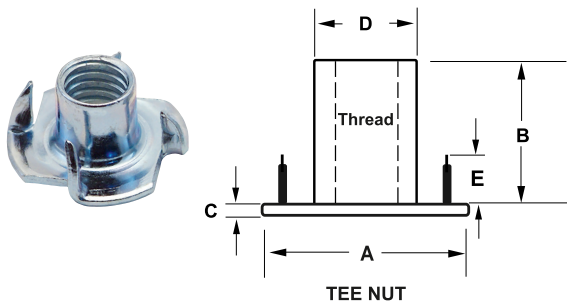


17-Brackets These *steel corner bottom and side brackets* are zinc plated and designed for wood or metal applications. The corner bracket (-CB) also serves as a corner brace.

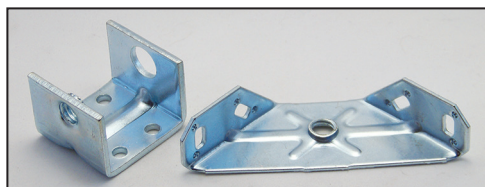

Side Bracket

Corner Bracket

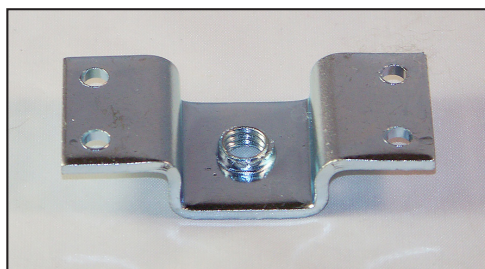

Bottom Bracket

Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	(C) Flange Thickness
15-Weld Nuts, Round Base					
IL28-2W	8-32	23/32	1/4	.209	.031
IL28-3AW	10-24*	3/4	9/32	.243	.039
IL28-3W	10-32*	3/4	9/32	.243	.039
IL28-4W	1/4-20*	3/4	5/16	.305	.047
IL28-4W2	1/4-20	3/4	7/8	.305	.047
IL28-5W	5/16-18*	7/8	3/8	.370	.055
IL28-5W2	5/16-18*	7/8	7/8	.375	.059
IL28-6W	3/8-16	1	7/16	.440	.063
IL28-6W2	3/8-16	1	5/8	.440	.063
IL28-7W	1/2-13	1-1/4	3/8	.591	.091
IL28-8W	5/8-11	1-7/16	3/8	.720	.091


Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	(E) Prong Height	(C) Flange Thick.	Drill Size
16-T-Nuts, Straight Barrel (3 Prong)							
IL29-0T	4-40	23/64	1/8	.130	3/32	.024	9/64
IL29-1T	6-32	9/16	1/4	.162	5/32	.024	11/64
IL29-2T	8-32	23/32	1/4	.209	3/16	.031	7/32
IL29-3AT	10-24*	3/4	9/32	.243	3/16	.039	1/4
IL29-3AT2	10-24	3/4	3/8	.243	9/32	.039	1/4
IL29-3T	10-32*	3/4	9/32	.243	3/16	.039	1/4
IL29-3T2	10-32	3/4	7/16	.243	5/16	.039	1/4
IL29-4T	1/4-20*	3/4	1/4	.305	1/8	.047	5/16
IL29-M6T	M6 x 1.0*	19.1	6.4	7.7	3.2	1.2	7.9
IL29-4T2	1/4-20*	3/4	7/16	.305	5/16	.047	5/16
IL29-4T3	1/4-20	3/4	9/16	.305	5/16	.047	5/16
IL29-5T	5/16-18*	7/8	3/8	.370	9/32	.055	3/8
IL29-5T2	5/16-18	7/8	5/8	.370	21/64	.055	3/8
IL29-6T	3/8-16	1	7/16	.440	5/16	.063	29/64

Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	(E) Prong Height	(C) Flange Thick.	Drill Size
16A-T-Nuts, Straight Barrel (4 Prong)							
IL29-M8T	M8x1.25	22.2	15.9	9.4	7.9	1.4	9.5
IL29-6T2	3/8-16*	1	7/16	.460	5/16	.063	15/32
IL29-M10T	M10x1.5	25.4	11.1	11.5	7.9	1.6	11.5
IL29-6AT	3/8-24	1	7/16	.430	5/16	.063	29/64
IL29-7T	1/2-13	1-1/4	3/8	.591	7/32	.091	19/32
IL29-8T	5/8-11	1-7/16	3/8	.720	1/4	.091	23/32

Part Nbr.	Thread	Length	Width	Flange Length
17-Corner Bracket				
IL30-5-CB	5/16-18	3-7/8	1-3/8	7/8
IL30-6-CB	3/8-16	3-7/8	1-3/8	7/8

17-Side Bracket				
IL30-5-SB	5/16-18	1-5/8	1-1/2	1-1/8
IL30-6-SB	3/8-16	1-5/8	1-1/2	1-1/8

17-Bottom Bracket				
IL30-5-BB	5/16-18	2-3/4	1-1/4	7/8
IL30-6-BB	3/8-16	2-3/4	1-1/4	7/8

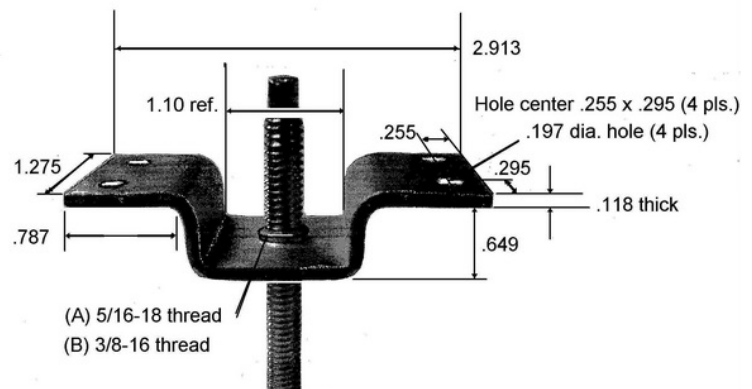



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

WELD/HOLE NUTS

Weld Nuts/Round Nuts with Holes

IEC's *weld/hole nuts* allow a nail, drive screw or rivet to hold the threaded nut in place for wood applications. The holes also provide an anchoring point for parts molded of plastic, allowing the plastic to flow through the holes. In metal applications, the nut can be welded or riveted in place.



ROUND NUTS WITH HOLES (2 OR 3 HOLES)

Highly Stocked	Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	Hole Dia.	(C) Flange Thickness
★	IL28-1H	6-32	9/16	1/4	.162	.075	.024
★	IL28-2H	8-32	23/32	1/4	.208	.098	.031
	IL28-3AH	10-24	3/4	9/32	.243	.098	.039
	IL28-3AH2	10-24	3/4	5/16	.243	.098	.039
★	IL28-3H	10-32	3/4	9/32	.243	.098	.039
	IL28-4H2	1/4-20	3/4	1/4	.305	.098	.047
★	IL28-4H	1/4-20	3/4	5/16	.305	.098	.047
★	IL28-M6H	M6x1.0	19.1	7.9	7.7	2.5	1.2
	IL28-4H3	1/4-20	3/4	7/16	.305	.098	.047
	IL28-4H4	1/4-20	3/4	9/16	.305	.098	.047
	IL28-M6H2	M6x1.0	19.1	14.3	7.7	2.5	1.2
	IL28-4H5	1/4-20	3/4	7/8	.305	.098	.047
★	IL28-5H	5/16-18	7/8	3/8	.370	.098	.055
★	IL28-M8H	M8x1.25	22.2	9.5	9.4	2.5	1.4
	IL28-5H2	5/16-18	7/8	5/8	.370	.098	.055
	IL28-M8H2	M8x1.25	22.2	15.9	9.4	2.5	1.4
	IL28-5H3	5/16-18	7/8	7/8	.375	.098	.059
	IL28-5AH	5/16-24	7/8	3/8	.390	.098	.063
★	IL28-6H	3/8-16	1	7/16	.440	.145	.063
★	IL28-M10H	M10x1.5	25.4	11.1	11.5	3.7	1.6
	IL28-6H2	3/8-16	1-1/4	3/4	.464	.145	.071
★	IL28-7H	1/2-13	1-1/4	3/8	.591	.145	.091
★	IL28-8H	5/8-11	1-7/16	3/8	.720	.145	.091



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com


Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

PROPELLOR NUTS

Propeller Nuts

The deep ribs on these IEC *propeller nuts* provide positive retention for applications that may split with regular prong-type T-Nuts. Also popular in hard plastic applications. Also available unplated and in stainless steel (add -SS to P/N) on selected sizes indicated by an (*) after the P/N.

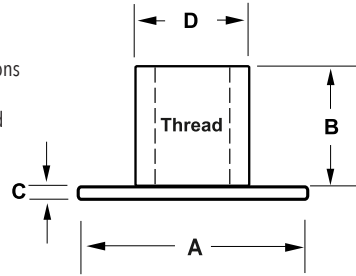



PROPELLER NUTS

Highly Stocked	Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	Skive Length	Skive Dia.	(C) Flange Thickn.	Drill Size
★	IL29-2P	8-32	.500	1/4	.213	.100	.245	.039	13/64
	IL29-3AP	10-24	45/64	5/16	.255	.110	.300	.047	1/4
★	IL29-3P	10.32	19/32	15/64	.243	.118	.300	.039	1/4
★	IL29-4P*	1/4-20	3/4	5/16	.305	.155	.352	.047	?
	IL29-4P2	1/4-20	3/4	7/16	.305	.175	.352	.047	5/16
	IL29-4P3	1/4-20	3/4	9/16	.390	.175	.352	.047	5/16
★	IL29-5P*	5/16-18	7/8	3/8	.390	.245	.470	.063	?
	IL29-5P2	5/16-18	7/8	5/8	.390	1/4	.429	.063	25/64
	IL29-5P3	5/16-18	7/8	7/8	.385	9/32	.470	.059	25/64
★	IL29-6P*	3/8-16	1	7/16	.440	7/32	.535	.063	29/64
	IL29-6P2	3/8-16	1	5/8	.440	7/32	.535	.063	29/64
★	IL29-7P	1/2-13	1-1/4	3/8	.580	13/64	.690	.091	19/32
★	IL29-8P	5/8-11	1-1/4	3/8	.730	13/64	.840	.091	47/64



Weld Nuts/Rectangular Nuts with Holes

These IEC *rectangular nuts* with holes allow a nail, screw or rivet to hold the threaded nut in place for both wood and plastic applications. They also can be used in weld applications. Also available unplated and in stainless steel (add -SS to P/N) on selected sizes indicated by an (*) after the P/N. Note: SS nuts are stocked without holes.

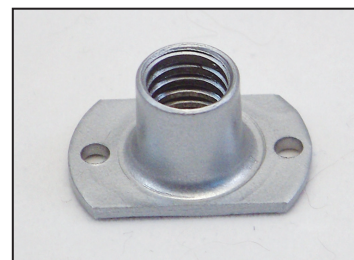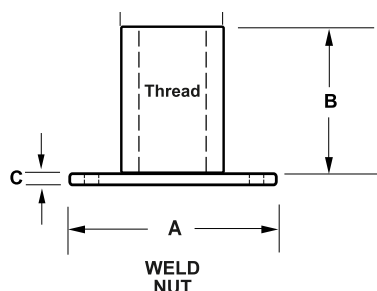


RECTANGULAR NUTS WITH HOLES

Highly Stocked	Part Number	Thread Size	(A) Flange Length	Flange Width	(B) Barrel Height	(D) Barrel Dia.	Hole Dia.	(C) Flange Thickness
★	IL28-2R*	8-32	23/32	7/16	1/4	.209	.098	.031
	IL28-3AR	10-24	3/4	1/2	9/32	.243	.098	.039
★	IL28-3R	10-32	3/4	1/2	9/32	.243	.098	.039
★	IL28-4R	1/4-20	3/4	1/2	5/16	.305	.130	.047
	IL28-4R2	1/4-20	3/4	1/2	7/16	.305	.130	.047
★	IL28-4R3	1/4-20	3/4	1/2	9/16	.305	.130	.047
	IL28-4R4	1/4-20	3/4	1/2	7/8	.305	.098	.047
★	IL28-5R*	5/16-18	7/8	9/16	3/8	.305	.130	.055
	IL28-5R2	5/16-18	7/8	9/16	5/8	.370	.098	.055
★	IL28-6R* IL28-M10R	3/8-16 M10x 1.5	1 25.4	5/8 15.9	7/16 11.1	.440 11.5	.142 3.6	.063 1.6
★	IL28-7R	1/2-13	1-3/8	1-3/8	7/16	.591	.165	.091

IL28-7R has a square Base with 4 holes

Rectangular T-Nuts

These IEC *rectangular t-nuts* can be used in applications for wood or plastic where space is restricted.

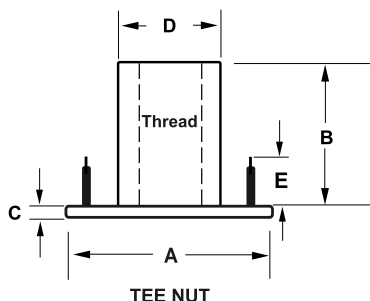



RECTANGULAR T-NUTS

Highly Stocked	Part Number	Thread Size	(A) Flange Dia.	Flange Width	(B) Barrel Height	(D) Barrel Dia.	(E) Prong Height	(C) Flange Thickness
★	IL29-2R	8-32	23/32	1/2	1/4	.209	5/32	.031
	IL29-3AR	10-24	3/4	1/2	9/32	.243	1/4	.039
★	IL29-3R	10-32	3/4	1/2	9/32	.243	15/64	.039
	IL29-4R2	1/4-20	3/4	1/2	1/4	.305	15/64	.047
★	IL29-4R	1/4-20	3/4	1/2	5/16	.305	1/4	.047
	IL29-4R3	1/4-20	3/4	1/2	7/16	.305	15/64	.047
	IL29-4R4	1/4-20	3/4	1/2	9/16	.305	15/64	.047
★	IL29-5R	5/16-18	7/8	9/16	3/8	.390	5/16	.063
	IL29-5R2	5/16-18	7/8	9/16	5/8	.370	9/32	.059
★	IL29-6R	3/8-16	1/1	5/8	7/16	.440	5/16	.063



Half Spherical Nail-On Bumpers / Feet

These *half spherical vibration and noise dampening nail-on bumpers* and or feet are available in black or dark brown.



HALF SPHERICAL NAIL-ON BUMPERS / FEET

P/N	Color	(A) Dia.	(C) Height	(B) Nail Length
IL397-B	BLACK	3/8	7/32	3/8
IL397-BR	BROWN	3/8	7/32	3/8
IL398-B	BLACK	1/2	5/16	3/8
IL398A-B	BLACK	3/4	1/2	3/8

Adhesive-Backed, Nail-In and Slip-On Sliders

IEC's *sliders* are designed to help move large furniture and equipment, protect carpets from snags, protect floors and decks from scratches and rust stains, reduce table wobble, dampen vibration, and keep furniture joints from loosening when being moved into position. Offered in round, square (-SQ), rectangle (-RE) and triangular (-TR) shapes.

Typical applications include patio furniture, bookcases, chests of drawers, entertainment centers, file cabinets, refrigerators, stoves, washing machines, sofas, beds, tables, chairs, desks, bar stools, appliances, exercise equipment, office partitions, etc.

When using *sliders* on wood floors, the floor should be clean and free from grit or scratching may occur. Sliders are not recommended on newly refinished wood floors for at least 30 days after refinishing.


The *solid peel and stick sliders* are essentially "nail-less" sliders. Nail-in sliders are designed for wooden legs and are ideal for more rugged applications.



NON-PADDED (SOLID) PEEL & STICK SLIDERS

P/N	Dia.	Thick.	Color	Pkg
IL24A-SLDR-NP	3/4	1/8	WHITE	20
IL24A-SLDR-NP-100	3/4	1/8	WHITE	100
IL25-SLDR-NP	1	1/8	WHITE	20
IL25-SLDR-NP-100	1	1/8	WHITE	100

Standard color is white. For brown add (-BR) to P/N. For black add (-BLK) to P/N. Intended for light-duty applications. Not recommended for tables and chairs.

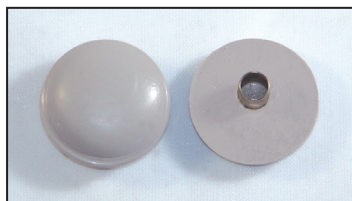

NAIL-IN SLIDERS

P/N	Dia.	Thick.	Color	Pkg
IL25-SLDR-N	1	1/4	WHITE	20
IL25-SLDR-N-100	1	1/4	WHITE	100
IL27-SLDR-N	1-1/2	1/4	WHITE	20
IL27-SLDR-N-100	1-1/2	1/4	WHITE	100


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS**SLIDERS & GRIPPER PADS****PTFE Nail Glide Slider**

These *PTFE Nail Glide Sliders* (similar to Teflon®) have a gray base with a black rubber top cushion.

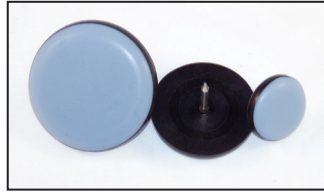

PTFE Nail Glide Sliders with Rubber Cushion

P/N	Color	Diameter	Height	Nail Length
IL20-2-PTFE	GRAY	3/4	3/16	5/8
IL20-3-PTFE	GRAY	7/8	3/16	5/8
IL20-4-PTFE	GRAY	1	3/16	5/8
IL20-5-PTFE	GRAY	1-1/8	1/4	5/8
IL20-6-PTFE	GRAY	1-1/2	1/4	5/8

Slip On Sliders

IEC's *slip-on sliders* are designed to fit over round or square chair legs and existing glide feet.

The brown *slip-on sliders* have a black base and the grey *slip-on sliders* have an off-white base. Also available with felt base. (See Slip-on felt section).



SLIP ON SLIDERS

P/N	Leg Size	Base Dia.	Color	Pkg
IL26-SLDR-SO-BR	3/4-1-1/4	1-3/4	BROWN	1
IL26-SLDR-SO-GR	3/4-1-1/4	1-3/4	GREY	1
IL27-SLDR-SO-BR	1-1-1/2	1-3/4	BROWN	1
IL27-SLDR-SO-GR	1-1-1/2	1-3/4	GREY	1

Wood Screw Non-Skid Gripper Pads

IEC's *wood screw non-skid gripper pads* protect floors and reduce sliding. They have a black non-marring thermo-plastic rubber (TPR) base. They can also use sheet metal or machine screws, rivets, etc.



NON-SKID GRIPPER PADS (WITHOUT WASHER)

P/N	Diameter	Thickness	Hole Size
IL25A-GRIP-SCREW	1-1/8	1/4	3/16
IL27B3-GRIP-SCREW	1-7/8	1/4	3/16
IL27A2-GRIP-SCREW	2-1/4	1/4	3/16
IL27G-GRIP-SCREW	3-1/4	1/4	3/16

NON-SKID GRIPPER PADS (WITH WASHER)

P/N	Diameter	Thickness	Hole Size
IL25-GRIP-SCREW	1	5/16	3/16
IL27-GRIP-SCREW	1-1/2	5/16	3/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

SLIDERS

Adhesive-Backed Regular-Duty Sliders

IEC's *regular-duty sliders* are designed to help move large furniture and equipment, protect carpets from snags, protect floors and decks from scratches and rust stains, reduce table wobble, dampen vibration, and keep furniture joints from loosening when being moved into position. Offered in round, square (-SQ), rectangle (-RE) and triangular (-TR) shapes.

The *regular-duty sliders* have a rigid felt peel and stick cushion inside the base which can adhere to legs that may be larger than the polymer base. For rugged duty applications. See IEC's commercial duty sliders on page 16 of this catalog.

Typical applications include patio furniture, bookcases, chests of drawers, entertainment centers, file cabinets, refrigerators, stoves, washing machines, sofas, beds, tables, chairs, desks, bar stools, appliances, exercise equipment, office partitions, etc.

When using *sliders* on wood floors, the floor should be clean and free from grit or scratching may occur. Sliders are not recommended on newly refinished wood floors for at least 30 days after refinishing.



PEEL & STICK SLIDERS - REGULAR DUTY (ROUND)

P/N	Dia.	Thick.	Color	Pkg
IL25-SLDR	1	1/8	BEIGE	4
IL25-SLDR-20	1	1/8	BEIGE	20
IL25-SLDR-100	1	1/8	BEIGE	100
IL26-SLDR	1-1/4	1/8	BEIGE	4
IL26-SLDR-20	1-1/4	1/8	BEIGE	20
IL26-SLDR-100	1-1/4	1/8	BEIGE	100
IL27B-SLDR	1-3/4	1/8	BEIGE	4
IL27B-SLDR-20	1-3/4	1/8	BEIGE	20
IL27B-SLDR-100	1-3/4	1/8	BEIGE	100
IL27A2-SLDR	2-1/4	1/8	BEIGE	4
IL27A2-SLDR-20	2-1/4	1/8	BEIGE	20
IL27A2-SLDR-100	2-1/4	1/8	BEIGE	100
IL27E-SLDR	2-3/4	1/8	BEIGE	4
IL27E-SLDR-20	2-3/4	1/8	BEIGE	20
IL27E-SLDR-100	2-3/4	1/8	BEIGE	100
IL27K-SLDR	4	1/8	BEIGE	4
IL27K-SLDR-20	4	1/8	BEIGE	20
IL27K-SLDR-100	4	1/8	BEIGE	100
IL27N-SLDR	5	1/8	BEIGE	4
IL27N-SLDR-20	5	1/8	BEIGE	20
IL27N-SLDR-100	5	1/8	BEIGE	100



PEEL & STICK SLIDERS - REGULAR DUTY (SQUARE)

P/N	Size	Thick.	Pkg
IL25-SLDR-SQ	1	1/8	4
IL25-SLDR-SQ-20	1	1/8	20
IL25-SLDR-SQ-100	1	1/8	100
IL27A2-SLDR-SQ	2-1/4x2-1/4	1/8	4
IL27A2-SLDR-SQ-20	2-1/4x2-1/4	1/8	20
IL27A2-SLDR-SQ-100	2-1/4x2-1/4	1/8	100
IL27H-SLDR-SQ	3-1/2x3-1/2	1/8	4
IL27H-SLDR-SQ-20	3-1/2x3-1/2	1/8	20
IL27H-SLDR-SQ-100	3-1/2x3-1/2	1/8	100
IL27K-SLDR-SQ	4x4	1/8	4
IL27K-SLDR-SQ-20	4x4	1/8	20
IL27K-SLDR-SQ-100	4x4	1/8	100



Adhesive-Backed Regular-Duty Sliders

IEC's *regular-duty sliders* are designed to help move large furniture and equipment, protect carpets from snags, protect floors and decks from scratches and rust stains, reduce table wobble, dampen vibration, and keep furniture joints from loosening when being moved into position. Offered in round, square (-SQ), rectangle (-RE) and triangular (-TR) shapes.

The *regular-duty sliders* have a rigid felt peel and stick cushion inside the base which can adhere to legs that may be larger than the polymer base. For rugged duty applications. See IEC's commercial duty sliders on page 16 of this catalog.

Typical applications include patio furniture, bookcases, chests of drawers, entertainment centers, file cabinets, refrigerators, stoves, washing machines, sofas, beds, tables, chairs, desks, bar stools, appliances, exercise equipment, office partitions, etc.

When using *sliders* on wood floors, the floor should be clean and free from grit or scratching may occur. Sliders are not recommended on newly refinished wood floors for at least 30 days after refinishing.



PEEL & STICK SLIDERS - REGULAR DUTY (RECTANGLE)

P/N	Size	Thick.	Color	Pkg
IL24B-SLDR-RE	5/8x4	1/8	BEIGE	4
IL24B-SLDR-RE-20	5/8x4	1/8	BEIGE	20
IL24B-SLDR-RE-100	5/8x4	1/8	BEIGE	100



PEEL & STICK SLIDERS - REGULAR DUTY (TRIANGLE)

P/N	Size	Thick	Color	Pkg
IL27B-SLDR-TR	1-3/4x2-1/2	1/8	BEIGE	4
IL27B-SLDR-TR-20	1-3/4x2-1/2	1/8	BEIGE	20
IL27B-SLDR-TR-100	1-3/4x2-1/2	1/8	BEIGE	100
IL27H-SLDR-TR	3-1/2x4-1/2	1/8	BEIGE	4
IL27H-SLDR-TR-20	3-1/2x4-1/2	1/8	BEIGE	20
IL27H-SLDR-TR-100	3-1/2x4-1/2	1/8	BEIGE	100



Reuseable Foam Sliders

The *reusable foam padded sliders* do not have an adhesive backing on the foam pad and are designed for all applications. Also available in black (add -BLK). per special request.

REUSABLE FOAM SLIDERS

P/N	Dia.	Thick.	Color	Pkg
IL27E-SLDR-FRS	2-3/4	1/8	GREY	4
IL27E-SLDR-FRS-20	2-3/4	1/8	GREY	20
IL27E-SLDR-FRS-100	2-3/4	1/8	GREY	100
IL27K-SLDR-FRS	4	1/8	GREY	4
IL27K-SLDR-FRS-20	4	1/8	GREY	20
IL27K-SLDR-FRS-100	4	1/8	GREY	100
IL27N-SLDR-FRS	5	1/8	GREY	4
IL27N-SLDR-FRS-20	5	1/8	GREY	20
IL27N-SLDR-FRS-100	5	1/8	GREY	100



Adhesive-Backed Commercial-Duty Sliders

IEC's *commercial duty sliders* are designed to help move large furniture and equipment, protect carpets from snags, protect floors and decks from scratches and rust stains, reduce table wobble, dampen vibration, and keep furniture joints from loosening when being moved into position. Offered in round, square (-SQ), rectangle (-RE) and triangular (-TR) shapes.

The *commercial-duty sliders* have a thicker polymer base and a foam (not felt) peel and stick cushion which allows the leg to sit deeper inside the polymer base.

Typical applications include patio furniture, bookcases, chests of drawers, entertainment centers, file cabinets, refrigerators, stoves, washing machines, sofas, beds, tables, chairs, desks, bar stools, appliances, exercise equipment, office partitions, etc.

When using *sliders* on wood floors, the floor should be clean and free from grit or scratching may occur. Sliders are not recommended on newly refinished wood floors for at least 30 days after refinishing.



PEEL & STICK SLIDERS - COMMERCIAL DUTY (ROUND)

P/N	Dia.	Thick.	Color	Pkg
IL26-SLDR-CD	1-1/4	1/8	GREY	4
IL26-SLDR-CD-20	1-1/4	1/8	GREY	20
IL26-SLDR-CD-100	1-1/4	1/8	GREY	100
IL27B-SLDR-CD	1-3/4	1/8	GREY	4
IL27B-SLDR-CD-20	1-3/4	1/8	GREY	20
IL27B-SLDR-CD-100	1-3/4	1/8	GREY	100
IL27B3-SLDR-CD	1-7/8	1/8	GREY	4
IL27B3-SLDR-CD-20	1-7/8	1/8	GREY	20
IL27B3-SLDR-CD-100	1-7/8	1/8	GREY	100
IL27A2-SLDR-CD	2-1/4	1/8	GREY	4
IL27A2-SLDR-CD-20	2-1/4	1/8	GREY	20
IL27A2-SLDR-CD-100	2-1/4	1/8	GREY	100



PEEL & STICK SLIDERS - COMMERCIAL DUTY (RECTANGLE)

P/N	Size	Thick.	Color	Pkg
IL24A-SLDR-RE-CD	13/16x2-1/4	1/8	GREY	4
IL24A-SLDR-RE-CD-20	13/16x2-1/4	1/8	GREY	20
IL24A-SLDR-RE-CD-100	13/16x2-1/4	1/8	GREY	100
IL25-SLDR-RE-CD	7/8x2-7/8	1/8	GREY	4
IL25-SLDR-RE-CD-20	7/8x2-7/8	1/8	GREY	20
IL25-SLDR-RE-CD-100	7/8x2-7/8	1/8	GREY	100

Peel & Stick Slider Wraps



These *hexagon shaped sliders* will wrap around tubing and solid rod. The slitted sides ensure the pad will stay on. They can also adhere to existing glides. Perfect for stackable chairs and patio furniture.

PEEL & STICK SLIDER WRAPS

P/N	Size	Thick.	Color	Pkg Qty
IL27-SLDR-WH-125-WRP	1-1/2x1-7/8	1/8	WHITE-WRAP	20
IL27A-SLDR-WH-125-WRP	1-7/8x1-7/8	1/8	WHITE-WRAP	20
IL27-SLDR-BLK-125-WRP	1-1/2x1-7/8	1/8	BLACK-WRAP	20
IL27A-SLDR-BLK-125-WRP	1-7/8x1-7/8	1/8	BLACK-WRAP	20



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

SLIDERS



These round and square (-SQ) *clear plastic carpet sliders* are used mainly for carpet applications where the beige colored sliders are not preferred. Also used as caster wheel cups.



Slip-On Felt Feet

These *slip-on felt feet* are available in two sizes. They slip over round or square legs with or without feet already installed in the legs. Useful for both noise reduction and floor protection.

Wood Screw Sliders


IEC's *wood screw sliders* shown here allow for easy sliding. They have a PTFE base with a black rubber cushion top. They can also use sheet metal screws and standard machine screws with or without a nut.

PEEL & STICK CLEAR CARPET SLIDERS

P/N	Size	Thick.	Pkg
IL27-SLDR-CLR-R	1-1/2	1/8	4
IL27-SLDR-CLR-20-R	1-1/2	1/8	20
IL27-SLDR-CLR-100-R	1-1/2	1/8	100
IL27B-SLDR-CLR-R	1-3/4	1/8	4
IL27B-SLDR-CLR-20-R	1-3/4	1/8	20
IL27B-SLDR-CLR-100-R	1-3/4	1/8	100
IL27A2-SLDR-CLR-R	2-1/4	1/8	4
IL27A2-SLDR-CLR-20-R	2-1/4	1/8	20
IL27A2-SLDR-CLR-100-R	2-1/4	1/8	100
IL27E-SLDR-CLR-R	2-3/4	1/8	4
IL27E-SLDR-CLR-20-R	2-3/4	1/8	20
IL27E-SLDR-CLR-100-R	2-3/4	1/8	100
IL27K-SLDR-CLR-R	4	1/8	4
IL27K-SLDR-CLR-20-R	4	1/8	20
IL27K-SLDR-CLR-100-R	4	1/8	100
IL27A2-SLDR-CLR-SQ	2-1/4x2-1/4	1/8	4
IL27A2-SLDR-CLR-SQ-20	2-1/4x2-1/4	1/8	20
IL27A2-SLDR-CLR-SQ-100	2-1/4x2-1/4	1/8	100
IL27H-SLDR-CLR-SQ	3-1/2x3-1/2	1/8	4
IL27H-SLDR-CLR-SQ-20	3-1/2x3-1/2	1/8	20
IL27H-SLDR-CLR-SQ-100	3-1/2x3-1/2	1/8	100
IL27K-SLDR-CLR-SQ	4x4	1/8	4
IL27K-SLDR-CLR-SQ-20	4x4	1/8	20
IL27K-SLDR-CLR-SQ-100	4x4	1/8	100

SLIP ON FELT FEET

P/N	Leg Size	Base Dia.	Color
IL26-FELT-S0-BR	3/4-1-1/4	1-1/4	BROWN
IL26-FELT-S0-GR	3/4-1-1/4	1-1/4	GREY
IL27-FELT-S0-BR	1-1-1/2	1-1/2	BROWN
IL27-FELT-S0-GR	1-1-1/2	1-1/2	GREY



WOOD SCREW SLIDERS

P/N	Dia.	Base Height	Hole Size	Thread
IL25-SLDR-WOOD	1	3/16	3/16	#6 x 5/8
IL27A-SLDR-WOOD	2	1/4	3/16	#6 x 5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

SLIDERS/SLIP-ON FEET

Felt Cup Peel & Stick Floor Protectors

IEC's dark brown felt cup "peel & stick" floor protectors reduce scratches, noise and rust stains. They are available in round, square and rectangular sizes.



FELT CUP "PEEL & STICK" FLOOR PROTECTORS

P/N (round)	P/N (square)	SIZE (Inches)
IL25-CUP-FELT-RD	IL25-CUP-FELT-SQ	1
IL26-CUP-FELT-RD	IL26-CUP-FELT-SQ	1-1/4
	IL26A2-CUP-FELT-SQ	1-1/5
IL27-CUP-FELT-RD	IL27-CUP-FELT-SQ	1-1/2
IL27A-CUP-FELT-RD	IL27A-CUP-FELT-SQ	2
	IL26-CUP-FELT-RE	1-1/4 x 1-1/2
	IL27G3-CUP-FELT-RE	3-1/5 x 9/16

Stretch Over Felt Floor Protectors

IEC's stretch-over felt floor protectors fit over most glides to reduce scratches, noise and rust stains.

We recommend the purchase of the stretch tool to ease installation and removal.





STRECH OVER FELT FLOOR PROTECTORS

P/N	Base Dia.	Fits Over Glide
IL24A-STO-FELT	1-1/4	3/4 to 7/8
IL25-STO-FELT	1-1/2	1 to 1-5/16
IL-STO-1	BOTH	STRETCH-TOOL

Threaded Sliders

IEC's threaded sliders shown here allow for easy sliding and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black rubber cushion top.

Thread length is 1 (25mm) for metric threaded sliders.



THREADED SLIDERS

P/N	Dia.	Base Height	Thread
IL15-41-SLDR	7/8	1/4	1/4-20x1
IL15A-41-SLDR	1-1/8	1/4	1/4-20x1
IL15A-51-SLDR	1-1/8	1/4	5/16-18x1
IL15A-61-SLDR	1-1/8	1/4	3/8-16x1

Thread length is 1" for threaded sliders.


THREADED SLIDERS - METRIC

P/N	A Dia.	Base Height	Thread
IL15-M6-SLDR	7/8	1/4	M6X1.0
IL15A-M8-SLDR	1-1/8	1/4	M8X1.25
IL15A-M10-SLDR	1-1/8	1/4	M10X1.50

Thread length is 1" (25mm) for the metric threaded sliders.



Clear Vinyl Stretch Sleeve Glides



IEC's transparent *vinyl sleeve glides* stretch to fit over various leg sizes, in both round and square shapes. For square legs increase size by 1/4 inch. The flexible sleeve will form to the square leg. A heavy-duty dark brown felt pad is bonded to the bottom of the sleeve to reduce scratching, noise and rust stains.

Typical applications are chairs, tables, desks, stools, bar stools, walkers, crutches.

Clear PVC Felt Glides

IEC's clear *PVC felt glides* are made to fit the specified round leg size but will stretch slightly.

Vinyl Replacement Chair Tips (with or without Felt)

IEC's hard grey *vinyl chair tip floor protectors* reduce scratches, noise and rust stains.

The felt base tips are best for wood floors, while the vinyl (without felt) tips are best for sliding applications. The bottom of the vinyl tips are slightly curved.

Typical applications are chairs, tables, desks, stools, bar stools, walkers and crutches.

Sled Glides



IEC's *clear plastic and felt sled glides* snap over rods or tubing to reduce scratching and noise. Also available with heavy-duty floor protection felt bonded to the plastic glide.

CLEAR VINYL STRETCH SLEEVE FELT FLOOR PROTECTORS

P/N	Fits Dia. (Inches)
IL24C-SLV-CLR-FELT	1/2 to 5/8
IL24-SLV-CLR-FELT	5/8 to 3/4
IL25-SLV-CLR-FELT	7/8 to 1-1/16
IL26-SLV-CLR-FELT	1-1/8 to 1-1/4
IL27-SLV-CLR-FELT	1-1/2 to 1-5/8
IL27B-SLV-CLR-FELT	1-5/8 to 1-3/4



CLEAR PVC FELT GLIDES

P/N	Fits Dia. (Inches & mm)
IL24C-PVC-CLR-FELT	1/2 (12mm)
IL24B-PVC-CLR-FELT	5/8 (16mm)
IL24A-PVC-CLR-FELT	3/4 (18mm)
IL24A2-PVC-CLR-FELT	13/16 (20mm)
IL24-PVC-CLR-FELT	7/8 (24mm)
IL25-PVC-CLR-FELT	1 (25mm)



VINYL REPLACEMENT CHAIR TIPS (WITH OR WITHOUT FELT)

P/N (Without FELT)	P/N (With FELT)	SIZE (Inches)
IL24C-REPL-VNL	IL24C-REPL-FELT	1/2
IL24B-REPL-VNL	IL24B-REPL-FELT	5/8
IL24A-REPL-VNL	IL24A-REPL-FELT	3/4
IL24-REPL-VNL	IL24-REPL-FELT	7/8
IL25-REPL-VNL	IL25-REPL-FELT	1
IL25A-REPL-VNL	IL25A-REPL-FELT	1-1/8

CLEAR PLASTIC AND FELT SLED GLIDES

P/N	P/N	Tube/Rod Dia.
IL24D-SLED-CLR	IL24D-SLED-FELT	3/8
IL24C2-SLED-BLK	IL24C2-SLED-FELT	7/16
IL24B-SLED-CLR	IL24B-SLED-FELT	5/8
IL24A-SLED-CLR	IL24A-SLED-FELT	3/4
IL24-SLED-CLR	IL24-SLED-FELT	7/8
IL25-SLED-CLR	IL25-SLED-FELT	1
IL25A-SLED-CLR	IL25A-SLED-FELT	1-1/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS**CRUTCH TIP GLIDES****Rubber Crutch Tip Glides**

These *rubber crutch tip glides* are available in black (-B), white (-W) and gray (-G). They are non-skid; white and gray types are non-marring. They are useful for crutches, walkers, canes, tables, chairs, etc. For hollow legs, we recommend using a washer in the bottom of the glide to keep the leg from cutting through the glide.

**RUBBER CRUTCH TIP GLIDES**

P/N	LEG O.D.	HEIGHT
IL24F-CTG-B	1/8	3/8
IL24G-CTG-B	3/16	1/2
IL24E-CTG-B	1/4	3/4
IL24D-CTG-B	3/8	1-1/8
IL24C-CTG-B	1/2	1-3/16
IL24B-CTG-B	5/8	1-9/32
IL24A-CTG-B	3/4	1-3/8
IL24-CTG-B	7/8	1-1/2
IL25-CTG-B	1	1-9/16
IL25A-CTG-B	1-1/8	1-11/16
IL26-CTG-B	1-1/4	1-13/16
IL27-CTG-B	1-1/2	7/8
IL27A2-CTG-B	2-1/4	1-5/16
IL24C-CTG-W	1/2	1-13/16
IL24B-CTG-W	5/8	1-9/32
IL24A-CTG-W	3/4	1-3/8
IL24-CTG-W	7/8	1-1/2
IL25-CTG-W	1	1-9/16
IL25A-CTG-W	1-1/8	1-11/16
IL26-CTG-W	1-1/4	1-13/16
IL27-CTG-W	1-1/2	7/8
IL24C-CTG-G	1/2	1-3/16
IL24B-CTG-G	5/8	1-9/32
IL24A-CTG-G	3/4	1-3/8
IL24-CTG-G	7/8	1-1/2
IL25-CTG-G	1	1-9/16
IL25ACTG-G	1-1/8	1-11/16
IL26-CTG-G	1-1/4	1-13/16
IL27-CTG-G	1-1/2	7/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

LIGHT-DUTY LEVELERS

QUOTE REQUEST

Your Contact Information

NAME:	TITLE:
COMPANY:	E-MAIL:
STREET ADDRESS OR POB:	CITY:
STATE:	ZIP CODE:
PHONE:	FAX:

Standard Product Request

ITEM #	IEC PART NUMBER	DESCRIPTION	QUANTITY
1			
Comments:			
2			
Comments:			
3			
Comments:			
4			
Comments:			

CUSTOM or MODIFIED Product RequestSIMILAR TO IEC PN#: **BASE****STUD**

DIAMETER:	LENGTH:
MATERIAL:	THREAD:
SWIVEL:	MATERIAL:
FINISH: ☐ Gold Iridite ☐ Black Chromate	
☐ Clear Chromate	

OPTIONAL FEATURES

☐ TOP SLOT	☐
☐ NON-SKID PAD	☐
☐	☐
☐	☐
QUANTITY REQUESTED:	EST ANNUAL USAGE:
Comments / Special Instructions:	

PLEASE FAX THIS FORM TO: 562-498-2275



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

Warranty & Disclaimer

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

© Copyright 2019. International Equipment Components, Inc. All rights reserved.

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

HEAVY-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LIGHT-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

METRIC LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.

2201 E. Willow Street, D-104,

Signal Hill, CA 90755

Email: sales@iec-corp.com

Phone: 562-597-4533

Fax: 562-498-2275

Web: www.iec-corp.com

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

KNOB & HANDLE



**CLAMP
ADJUST
STABILIZE
FASTEN**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

CAP & PLUG PRODUCTS



**FEET
SLIDE
PROTECT
FINISH**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

**SURFACE PROTECTION
SLIDERS, GRIPPERS & FELT**



**CUSHION
QUIET
SLIDE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LEG PRODUCTS CATALOG



**LEVEL
EXTEND
SUPPORT**

Ph. 562.597.4533